



STRIP-TILL **FALCON SF700**

Build the strip where you plant.

A robust Kinze toolbar paired with proven Yetter 2984 Strip Freshener CC row units, configured around the planter pass that follows.

40 to 66 ft.

TOOLBAR WORKING WIDTHS

1.5 to 4 in.

WORKING DEPTH

6 to 10 mph

OPERATING SPEED

16, 24, 36


ROW CONFIGURATIONS

One system. Two proven names.

WEIGHT TRANSFER

Weight where the work is.

Standard weight transfer distributes load across the three-section toolbar, so every row unit stays engaged from the center to the wing tips.

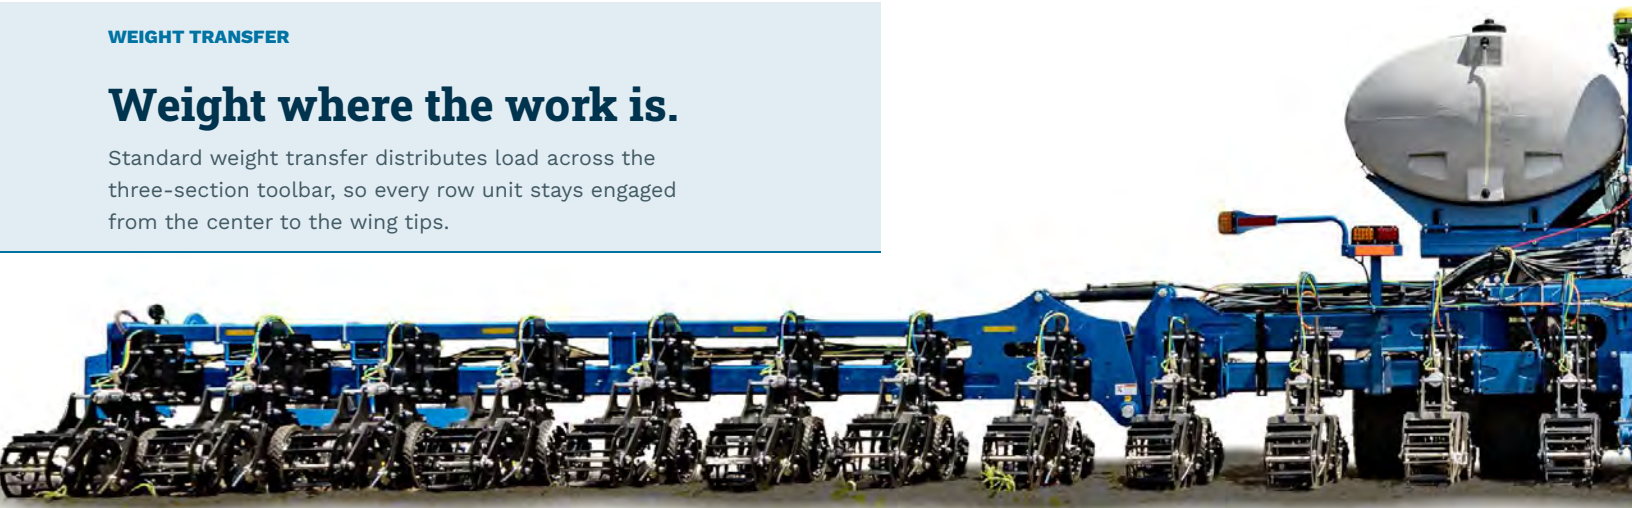

HOOK UP AND GO

Runs on the tractor you own.

Lower horsepower requirements reduce fuel demands while helping you make the most of the tractor you already have.

Three tractor remotes

MATCHED ROW CONFIGURATIONS

Build the strip around the planter.

Configure the strip-till pass around the row configuration and spacing of the planter and manage both passes as one system.

16, 24, 36 row configurations

KEY SPECIFICATIONS

Row configurations	16, 24 and 36 row
Row spacings	20 in., 22 in., 30 in.
Working width	40 ft. to 66 ft.
Toolbar platform	Kinze 5700
Toolbar frame	Three sections, 30 degrees wing flex
Under-toolbar clearance	24 in.
Row unit	Yetter 2984 Strip Freshener CC

Working depth	1.5 in. to 4 in., 1/4 in. increments
Parallel linkage travel	10 in.
Operating speed	6 to 10 mph
Tractor remotes	Three
Power requirement	10 hp per row unit
Liquid fertilizer	Optional, tank only, 1,500 gal.
Universal GPS mount	Implement guidance ready

MATCH THE STRIP TO THE PLANTER

ROWS	SPACING	WORKING WIDTH
36 row	22 in.	66 ft.
36 row	20 in.	60 ft.
24 row	30 in.	60 ft.
24 row	22 in.	44 ft.
24 row	20 in.	40 ft.
16 row	30 in.	40 ft.

Working width calculated from row count and row spacing.

THREE-SECTION TOOLBAR

Follow changing field contours.

A three-section Kinze 5700 toolbar with 30 degrees of wing flex follows changing field contours across the full working width.

24 in. under-toolbar clearance keeps residue moving through the machine rather than piling against it.

24 in. under-toolbar clearance

Controlled preparation, row by row.

UNIVERSAL GPS MOUNT

Stay on the strip.

A universal GPS mount accommodates implement guidance systems, helping maintain precise strip-to-planter alignment from one pass to the next.



ONE UNIT PER ROW

A Strip Freshener on every row.

16, 24 or 36 units, each holding its own depth, downforce and finish across the full working width.

16, 24, 36 units per machine

TRACTOR FIT

Size the tractor to the bar.

Ten horsepower per row unit, so the row count can be matched to the tractor power already on the farm.

10 hp per row unit

THE PASS, FRONT TO BACK

- 1 PNEUMATIC ROW CLEANER**
Moves residue off the strip ahead of the soil-working tools.
- 2 SPOKED GAUGE WHEEL**
Carries the unit and holds the working depth setting.
- 3 SHARK TOOTH® WHEELS**
Two angled wheels work the soil to prepare the seed zone.



DIRECTION OF TRAVEL →

ROLLING BASKET

Conditions and finishes the strip.

PARALLEL LINKAGE

Lets each unit follow changing field contours independently, with 10 in. of travel.

PNEUMATIC CONTROL

Air cylinders set row-unit and basket pressure from the cab.

ADJUST THE STRIP TO THE FIELD

1 ROW-UNIT DEPTH

Set the working depth conditions call for.

2 ROW-UNIT DOWNFORCE

Hold consistent depth and ride.

3 RESIDUE MANAGEMENT

Move residue off the strip without over-engaging soil.

4 STRIP CONDITIONING

Set basket pressure for the finish you want.



Bring strip-till into the planter system.

Falcon SF700 puts Kinze planter thinking one pass earlier, pairing a robust Kinze toolbar with proven Yetter Strip Freshener row units so the strip is built where the planter will run.

Talk to your Kinze dealer about matching a Falcon configuration to the planter you already run. Bring your row spacing, your acres and your timing, and your dealer will help size the machine to the pass that follows.

LEARN MORE AT: Kinze.com/falconsf700



Kinze Manufacturing, Inc. | 2172 M Ave
Williamsburg, Iowa 52361-0806 USA | Kinze.com
CustomerConnect@Kinze.com | (888) 599-6630

Copyright 2026 by Kinze Manufacturing, Inc. Kinze and the Kinze logo are trademarks owned by Kinze Manufacturing, Inc. Yetter, Strip Freshener and Shark Tooth are trademarks owned by Yetter Manufacturing Co. Kinze reserves the right to make changes in engineering, design and specifications, or add improvements, at any time without notice or obligation. Photography may show optional equipment.



Strip Freshener row units by Yetter Farm Equipment.
Yetter.com



Visit Kinze.com
for the most
current product
information

Authorized Dealer:

