

MODEL 3005 70 CM RIGID FRAME EXPORT PLANTER

PARTS MANUAL

M0309-02

Rev. 11/25

This manual applies to: Model: 3005 Rigid Frame Planters
Production Year 2025

Record serial number of your planter and date purchased:

Serial Number _____

Date Purchased _____

Information in this manual was current at time of printing. However, due to Kinze's ongoing product improvement, production changes may cause your machine to appear slightly different in detail. Kinze Manufacturing, Inc. reserves the right to change specifications or design without notice and without incurring obligation to install the same on machines previously manufactured.

Right hand (R.H.) and left hand (L.H.), as used throughout this manual, are determined by facing in the direction the machine will travel when in use, unless otherwise stated.

Hardware Size / Tool Required			
$\frac{1}{4}" = \frac{7}{16}"$	$\frac{7}{16}" = \frac{5}{8}"$ (nut for $\frac{7}{16}"$ hardware uses $\frac{11}{16}"$ tool)	$\frac{3}{4}" = 1\frac{1}{8}"$	$1\frac{1}{4}" = 1\frac{7}{8}"$
$\frac{5}{16}" = \frac{1}{2}"$	$\frac{1}{2}" = \frac{3}{4}"$	$\frac{7}{8}" = 1\frac{5}{16}"$	$1\frac{1}{2}" = 2\frac{1}{4}"$
$\frac{3}{8}" = \frac{9}{16}"$	$\frac{5}{8}" = 1\frac{5}{16}"$	$1" = 1\frac{1}{2}"$	

ROW UNIT

Pull Row Unit Assembly	P1
Shank Assembly, Seed Tube, and Depth Adjustment	P2
Parallel Arms, Mounting Support Plate, and Quick Adjustable Down Force Springs Option	P4
15" Seed Opener Disc Blade/Bearing Assembly and Scrapers	P6
Gauge Wheels	P8
"V" Closing Wheels	P10
Hopper Support and Meter Drive	P12
Row Unit Idler	P14
Seed Hopper and Lid	P15
Finger Pickup Seed Meter	P16
Brush-Type Seed Meter	P18
Vacuum Seed Meter	P20
Granular Chemical	P22
Granular Chemical Hopper and Hopper Panel Extension	P24
Granular Chemical Meter and Meter Drive	P25
Drag Closing Attachment	P26
Row Unit Mounted No Till Coulter	P27
Row Unit Mounted Residue Wheel	P28
Coulter Mounted Residue Wheels	P30

SPLIT ROW

Split Row Unit Assembly	P33
Parallel Arms and Face Plate (Split Row)	P34
Shank and Depth Adjustment (Split Row)	P36
Split Row Unit Drive	P38
Split Row Self-Leveling Hitch Extension	P40
Push Unit Idler Assembly	P42

VACUUM SYSTEM

Vacuum System	P44
Vacuum Fan With Hydraulic Motor	P46
Vacuum Fan Assembly	P47
Vacuum Hose Supports	P48
Miscellaneous	P49
Planter Mounted PTO Pump	P50
Hydraulic Tank	P52
Cooler Fan Assembly	P53
MTZ PTO Pump	P54
Universal PTO Pump	P55
PTO Gear Pump Mount Assembly (Before 2025)	P56
PTO Gear Pump Mount Assembly (2025)	P57
Pump with Mount Adapter	P58
Guide Tool	P59

BASE MACHINE

Hitch and Frame Assembly/Safety Chain	P60
Transport and Ground Drive Wheel Assembly	P62
Contact Wheel and Arm Assembly	P64
Seed Rate Transmission Assembly	P66
Driveline, 6 Row and 8 Row	P69
Row Marker Assembly, Conventional	P70
Row Marker Assembly, Two-Fold Low Profile, 8 Row	P72
Row Marker Spindle/Hub/Blade	P74
Water Tank Assembly	P76
Safety Chain	P77

ELECTRONICS

Electrical Components and SMV Sign	P78
KPM III Electronic Seed Monitor	P80

FERTILIZER

Double Disc Fertilizer Opener	P84
HD Single Disc Fertilizer Opener (Blade and Drop Tube)	P86
Notched Single Disc Fertilizer Opener	P88
Residue Wheel Attachment for Notched Single Disc Fertilizer Opener	P90
Depth/Gauge Wheel Attachment for Notched Single Disc Fertilizer Opener	P92
Fertilizer Opener Mounting Bar (Double Disc and Notched Single Disc Fertilizer Openers)	P93
Dry Fertilizer Transmission Assembly	P94
Dry Fertilizer Hopper and Mounts	P96
Dry Fertilizer Couplers/Shfts	P98
Bulk Dry Fertilizer Transmission Assembly	P99
Bulk Dry Fertilizer Hopper Assembly	P101
Bulk Dry Fertilizer Hopper and Tarp Installation	P103
Bulk Dry Fertilizer Driveshaft, Drop Tube & Tarp Retainer Installation	P104
Bulk Dry Fertilizer Hopper Tarp with Handle	P105
Liquid Fertilizer Tanks, Saddles, Mounts, Hoses, and Fittings, 6 and 8 Row	P106
Split Row Liquid Fertilizer Package Tanks, Saddles, Mounts, Hoses, and Fittings, 8 Row	P108
Split Row Liquid Fertilizer Piston Pump Drive	P110
Split Row Liquid Fertilizer Divider Assembly	P112
Liquid Fertilizer Piston Pump Drive	P114
Liquid Fertilizer Tube In Furrow	P117
Liquid Fertilizer Piston Pump Uses 18 Tooth Sprocket	P118
Liquid Fertilizer Piston Pump Flow Divider	P120


HYDRAULICS

Master Lift Cylinder	P122
Slave Lift Cylinder	P123
Lift Assist Cylinder, 6 Row and 8 Row	P124
Row Marker Cylinder, 6 Row	P125
Row Marker Cylinder, 8 Row	P126
Split Row Lift Cylinder	P127
Row Marker Sequencing/Flow Control Valve	P128
Hydraulic System, 8 Row Two-Fold Low Profile Row Marker	P130
Hydraulic System, 6 Row Conventional Row Marker . .	P132
Bypass Valve Kit	P134
Vacuum Fan Override Valve Block Assembly	P135
Planter Mounted PTO Pump Hydraulic Schematic	P136
Vacuum Hydraulic Schematic	P138

MISCELLANEOUS, PAINT, AND DECALS P140







NUMERICAL INDEX P148

NOTE: Row unit assembly does not include the following: seed meter assembly, seed tube assembly, row unit hopper assembly, closing wheels, or seed meter clutch.

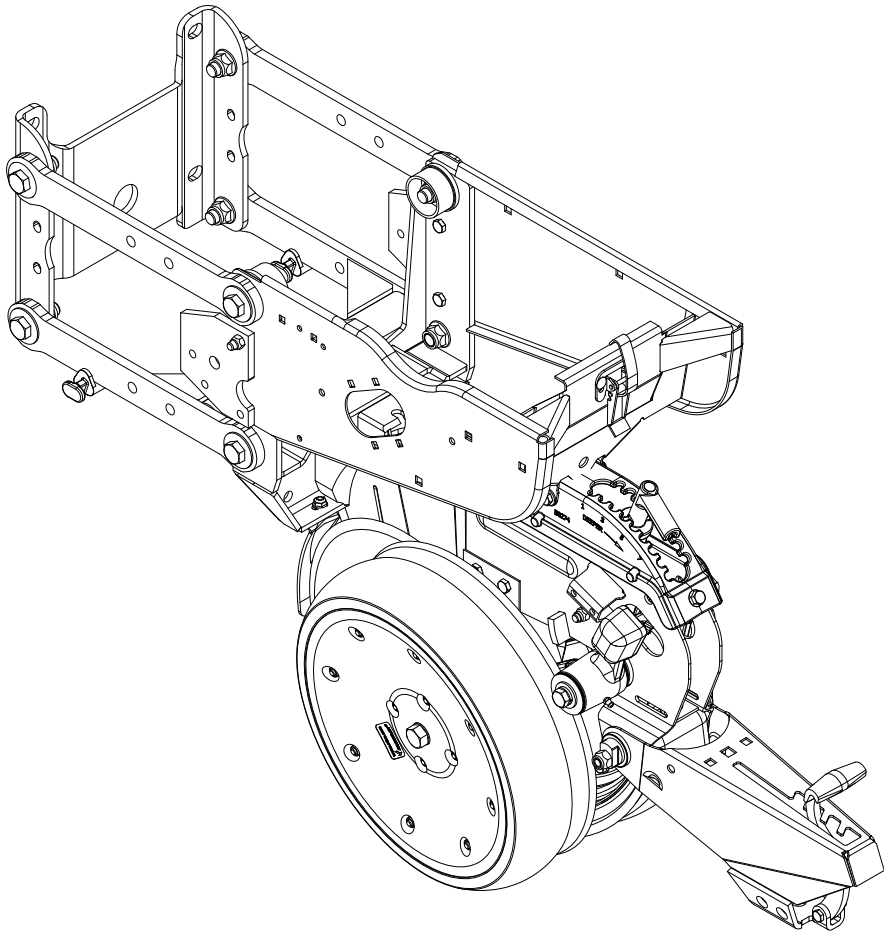

ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	G10502X	1	Pull Row Unit Assembly (Standard Gauge Wheels)
2	G10984X	1	Pull Row Unit Assembly (Spoked Gauge Wheels)

(IP1577)

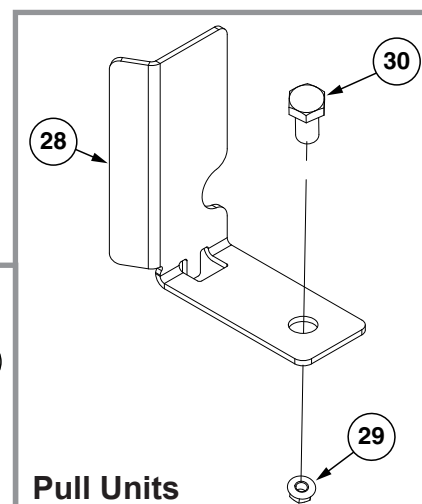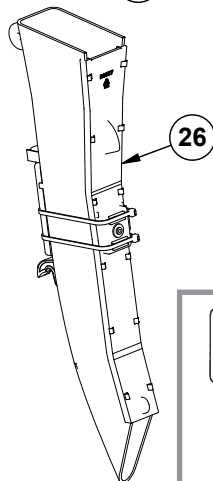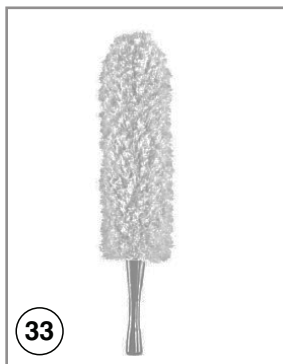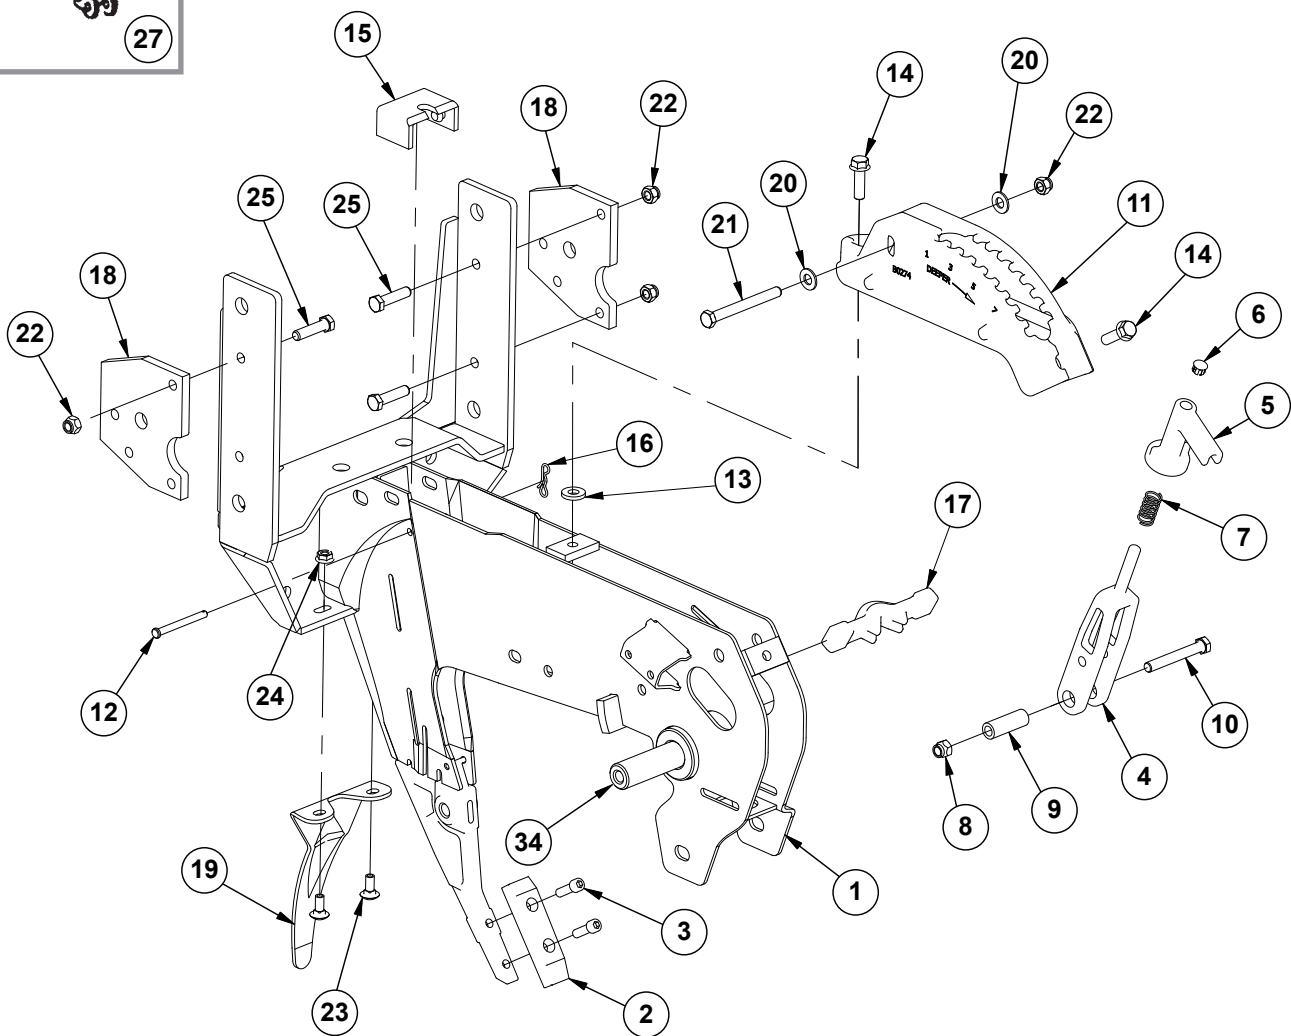


Push Units

Pull Units


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	GA10157	1	Shank W/Gauge Wheel Pivot Spindle and Set Screw
2	G10038601	1	Scraper
3	G10500901	2	Hex Socket Head Cap Screw, 5/16"-18 x 1"
4	GB0267	1	Lever, Depth Adjustment
5	GB0266	1	Handle, Depth Adjustment
6	GD3612	1	Cap Plug
7	GD10993	1	Spring
8	G11591	1	Nylon Lock Nut, 3/8"-24, Grade C
9	GD11259	1	Sleeve, 3/8" I.D. x 5/8" O.D. x 1 ²⁵ / ₃₂ " Long
10	G11592	1	Hex Head Cap Screw, 3/8"-24 x 2 ³ / ₄ ", Grade 8
11	GB0274	1	Cover, Depth Adjustment
12	G10551	1	Clevis Pin, 1/4" x 2 1/2"
13	G10207	1	Washer, 7/8" O.D. x 1 ³ / ₃₂ " I.D. x .134" (If Applicable)
14	G11015	2	Hex Washer Head Cap Screw, 3/8"-16 x 1 1/4"
15	GD16245	1	Sun Shade (Rubber)
16	G10122301	1	Bow Tie Cotter Pin
17	GB0265	1	Pivot Link, Depth Adjustment
18	GD24545	2	Row Unit Stop
19	GD28390	1	Shield
20	G11387	2	Flat Washer, 3/8" SAE
21	G10061	1	Hex Head Cap Screw, 3/8"-16 x 3 1/2"
22	G10108	4	Lock Nut, 3/8"-16
23	G10312	2	Carriage Bolt, 5/16"-18 x 3/4"
24	G10620	2	Serrated Flange Nut, 5/16"-18
25	G10003	3	Hex Head Cap Screw, 3/8"-16 x 1 1/2"
26	GA21515	1	Seed Tube Assembly
27	G3303-98	1	Chain, No. 41, 98 Pitch Including Connector Link (Mechanical)
	G3303-108	1	Chain, No. 41, 108 Pitch Including Connector Link (Vacuum)
	G3303-16	1	Chain, No. 41, 16 Pitch Including Connector Link (Used W/Row Unit Extension Brackets)
	GR0196	-	Connector Link, No. 41
28	GD29798	1	Chain Guard
29	G10071	1	Serrated Flange Nut, 1/2"-13
30	G10014	1	Hex Head Cap Screw, 1/2"-13 x 1"
31	GD17014	1	Hose Guide, Push Units
32	G10047	1	Hex Head Cap Screw, 3/8"-16 x 1 3/4"
	G11387	2-3	Flat Washer, 3/8" SAE
	G10108	1	Lock Nut, 3/8"-16
33	G10475701	-	Professional Microfiber Duster, 19" (for cleaning Seed Tube sensors)
34	GD11001	1	Spindle
	G10438	1	Hex Head Cap Screw, 1/2"-13 x 3/4"

(IP1578)

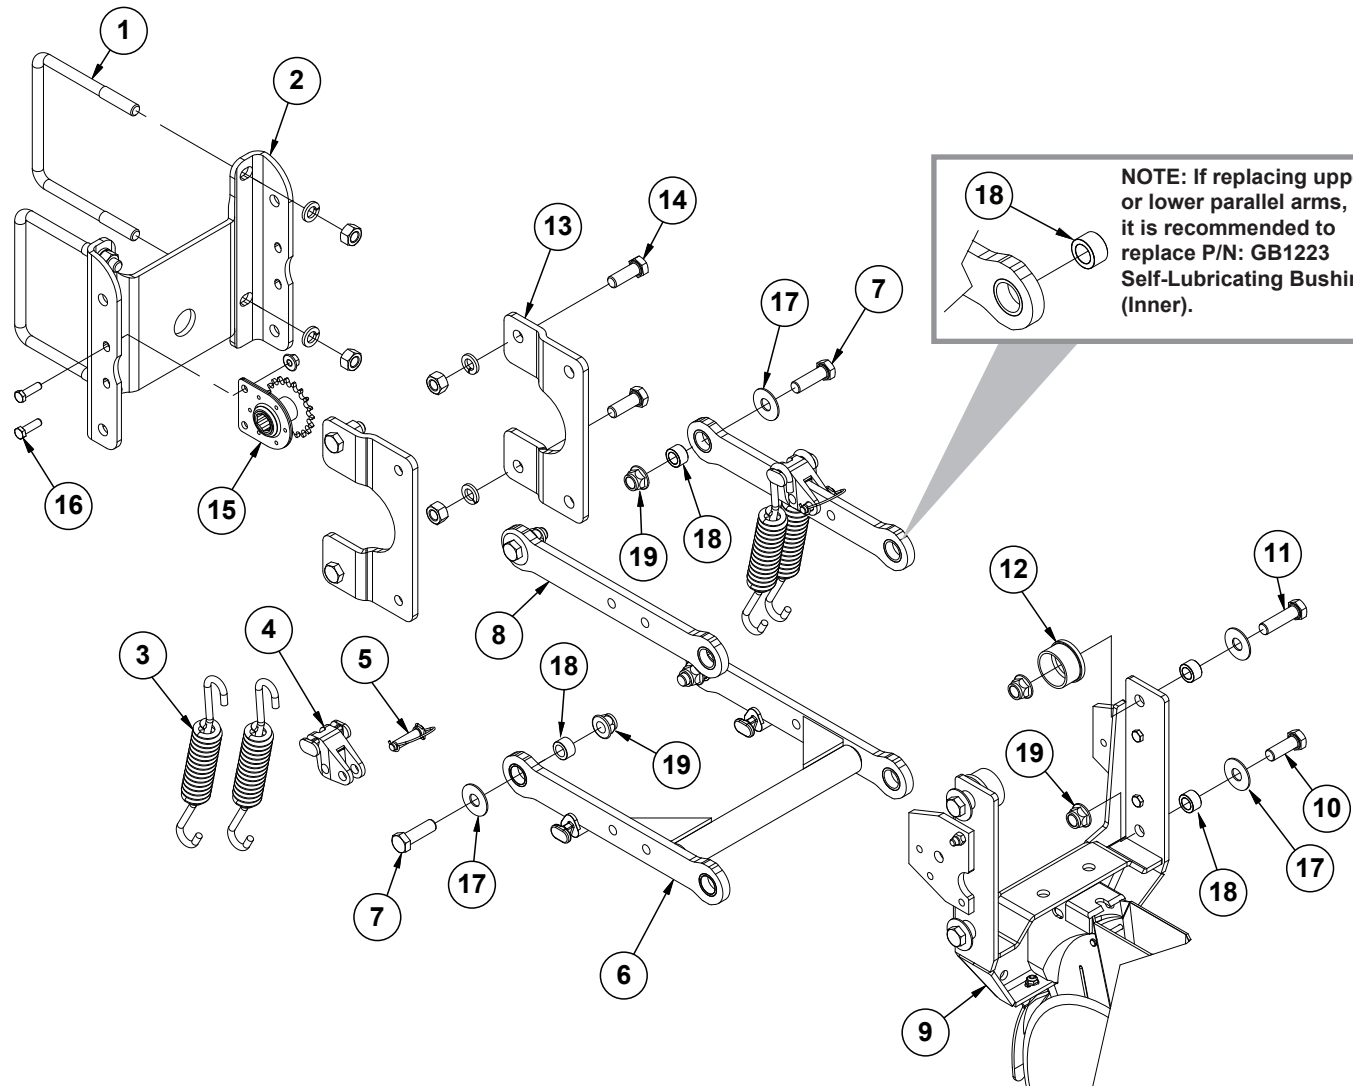


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	GD1114	2	U-Bolt, 7" x 7" x 5/8"-11 (Pull Units/Back Rows)
	G10230	4	Lock Washer, 5/8"
	G10104	4	Hex Nut, 5/8"-11
2	GD10036	1	Mounting Support Plate
3	GD21337	4	Heavy Duty Down Pressure Spring
4	GB0186	2	Spring Anchor
5	GD14217	2	Tab Lock Pin, 7/16" x 1 1/2"
6	G10011201	1	Lower Parallel Arm Assembly
	GB1224		Self-Lubricating Bushing, 1 1/4" O.D. x 1" I.D. x 1/2" (Included in G10011201)
7	G10732	4	Hex Head Cap Screw, 5/8"-18 x 2"
8	G10011101	2	Upper Parallel Arm Assembly
	GB1224	2	Self-Lubricating Bushing, 1 1/4" O.D. x 1" I.D. x 1/2" (Included in G10011101)
9	---	1	See "Shank Assembly, Seed Tube, and Depth Adjustment" on page P2
10	G10751	2	Hex Head Cap Screw, 5/8"-18 x 1 3/4"
11	G10752	2	Hex Head Cap Screw, 5/8"-18 x 2 1/4"
12	GB0314	2	Hopper Mount
13	GB0366	2	Extension Bracket
14	G10751	4	Hex Head Cap Screw, 5/8"-18 x 1 3/4"
	G11976	4	Flat Washer, 5/8" x 1-3/4"
	G11514	4	Non-Serrated Flange Locknut, 5/8"-18
15	GA1720	1	Bearing/Sprocket, 7/8" Hex Bore
16	G10004	2	Hex Head Cap Screw, 3/8"-16 x 1 1/4"
	G11091	2	Serrated Flange Nut, 3/8"-16
17	G11976	8	Flat Washer, 5/8" x 1 3/4"
18	GB1223	8	Self-Lubricating Bushing
19	G11514	8	Lock Nut, 5/8"-18
A	G6325X	-	U-Bolt Package For 5" x 7" Toolbar, Includes: (2) GD1113, (4) G10230, (4) G10104
B	G1K758	-	Pull Row Unit Parallel Arm Kit, Includes: (2) G10011101, (1) G10011201, (8) GB1223, (8) G11976, (4) G10732, (2) G10751, (2) G10752, (8) G11514, (1) IS1066

(IP1579)

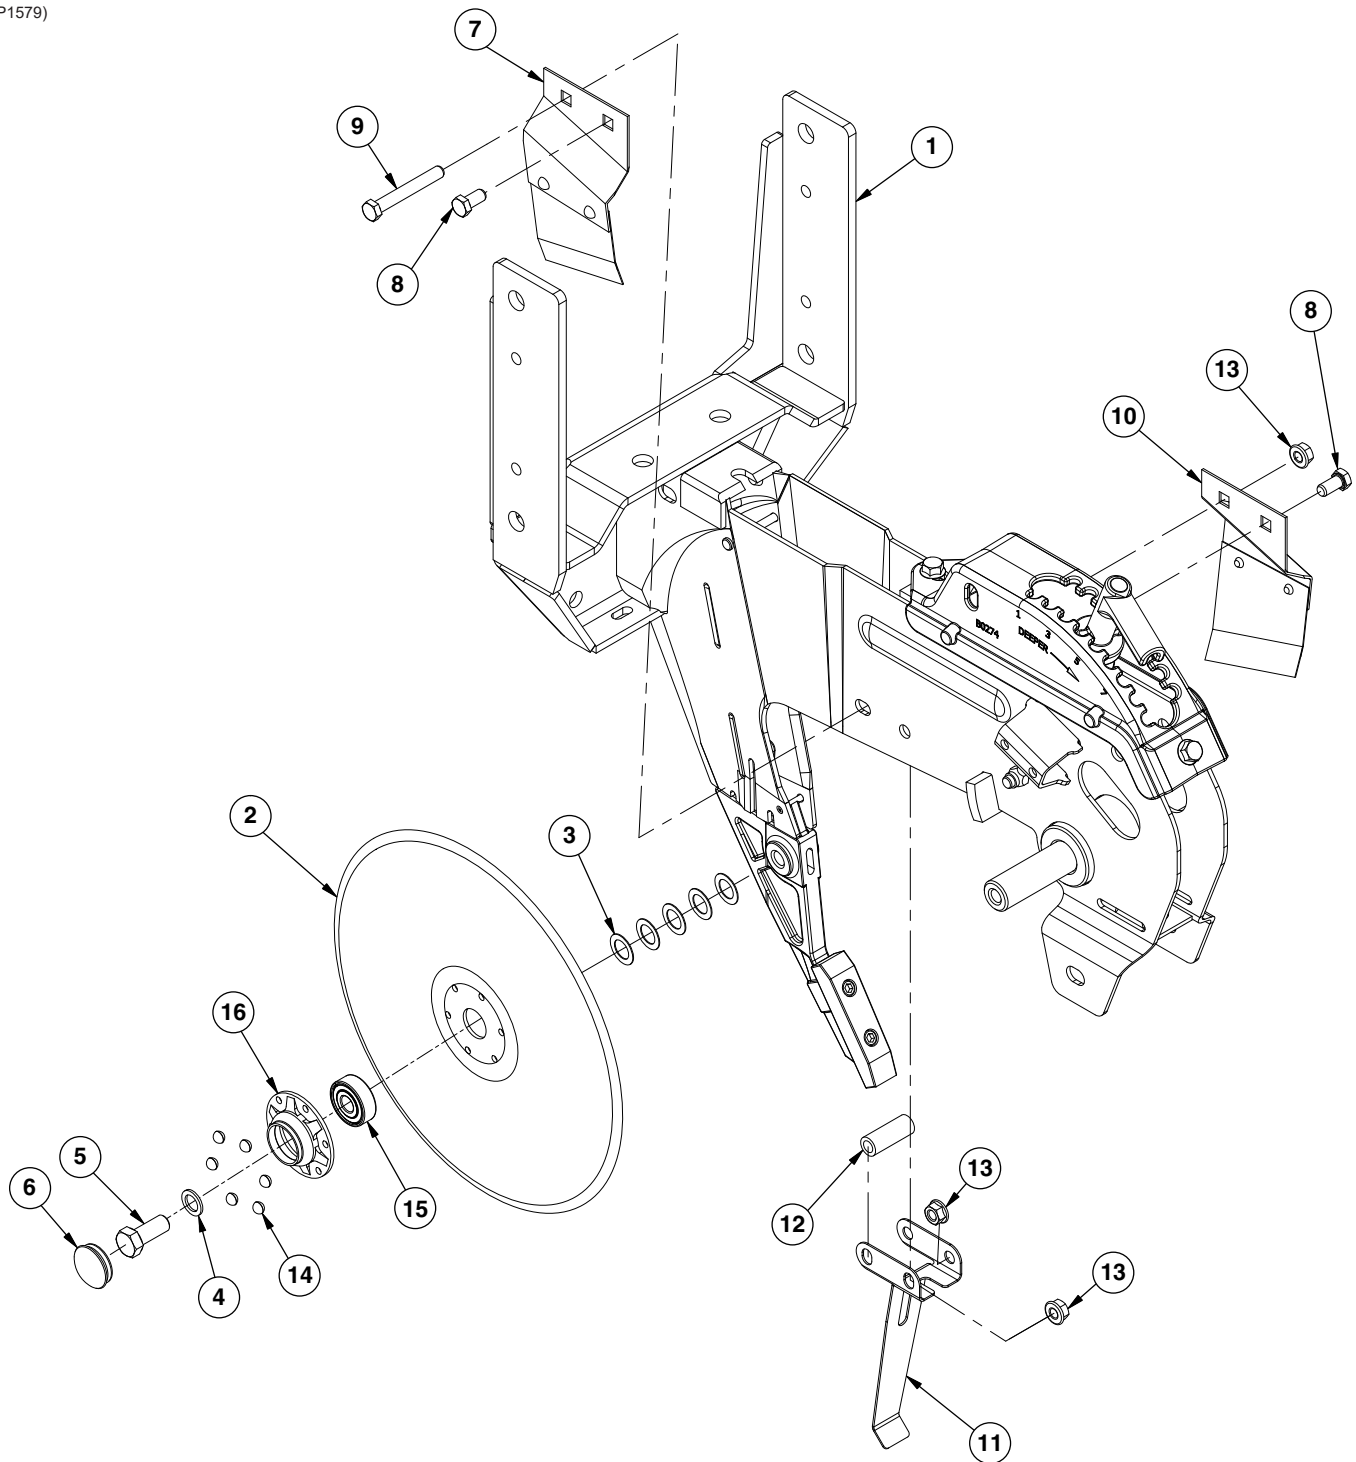

ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	G10037301	1	See "Shank Assembly, Seed Tube, and Depth Adjustment" on page P2
2	GD11306	1	Disc Blade, 3.5 mm x 15"
3	GD30725	10	Machine Bushing, $\frac{5}{8}$ " (.030" Thick) (5 Per)
4	G10397801	2	Bushing, 1 x .656 x 12
5	GD36856	1	Opener Blade Bolt, $\frac{5}{8}$ "-11 x $1\frac{3}{4}$ ", Grade 5
	G10005	1	Hex Head Cap Screw, $\frac{5}{8}$ "-11 x $1\frac{3}{4}$ "
6	G10090401	2	Plastic Ribbed Hub Cap (1 Per)
7	GA2012L	1	Disc Scraper, L.H.
8	G10002	2	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x $\frac{3}{4}$ "
9	G10325	1	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x $2\frac{3}{4}$ "
10	GA2012R	1	Disc Scraper, R.H.
11	GD35444	1	Seed Tube Bracket
12	GD2971-26	1	Sleeve, $\frac{3}{8}$ " I.D x $\frac{5}{8}$ " O.D. x 1.63" Long
13	G10622	3	Serrated Flange Nut, $\frac{3}{8}$ "-16
14	GD36990	6	Rivet, $\frac{1}{4}$ " x $\frac{9}{16}$ "
15	GA26920	1	Bearing
16	GD36860		Bearing Housing
A	G10018801	-	Disc Blade/Bearing Assembly, Less Dust Cap (Items 2, 14-16)



(IP1580/103225)

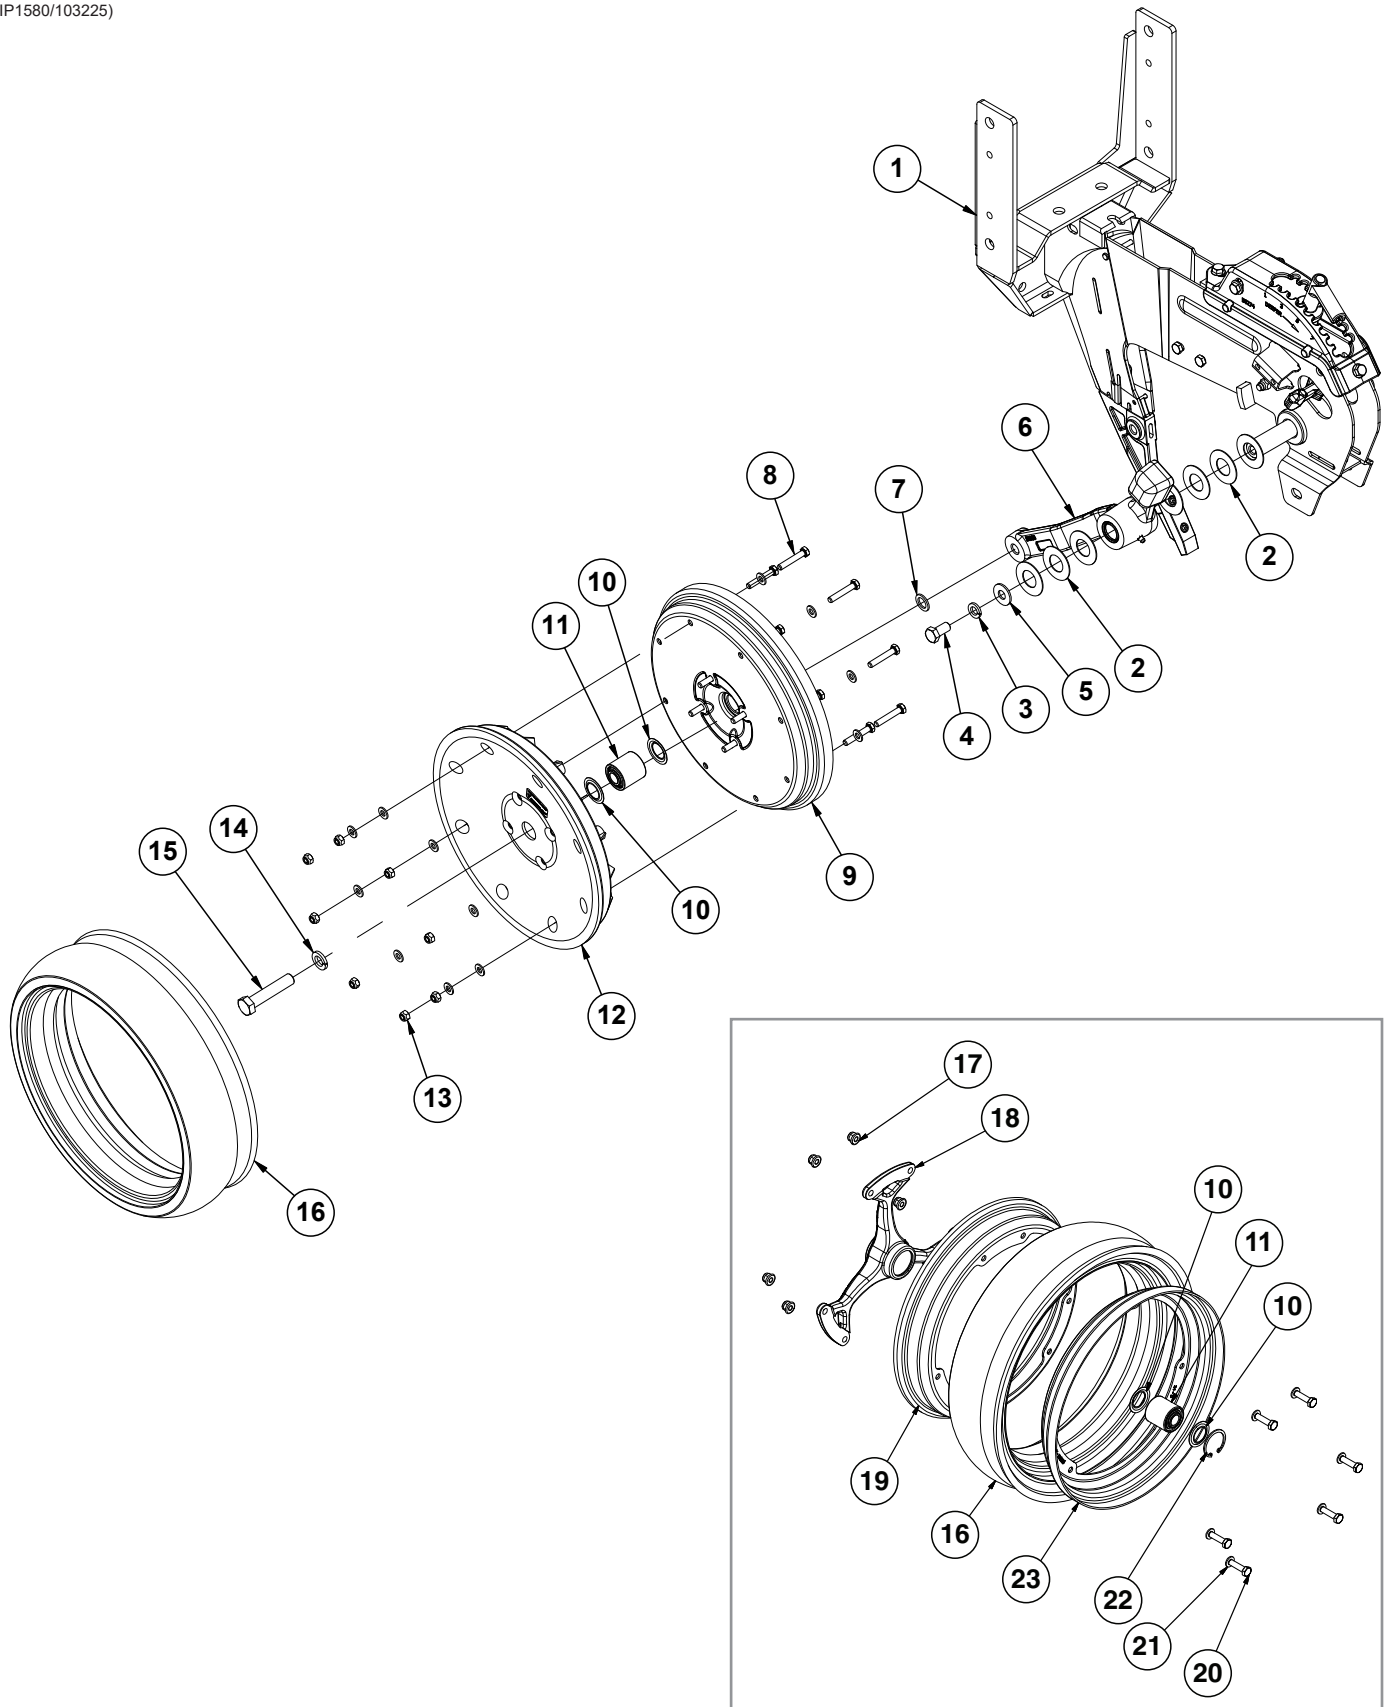

Spoked Gauge Wheel



ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	---	-	See "15" Seed Opener Disc Blade/Bearing Assembly and Scrapers" on page P6
2	G10940	7	Machine Bushing, 1" (.048" Thick)
3	G10228	2	Lock Washer, 1/2"
4	G10014	2	Hex Head Cap Screw, 1/2"-13 x 1"
5	G10216	2	Washer, 1/2" USS
6	GA21677	1	Wheel Arm W/Grease Fitting, Bushings, and Seals, L.H. (Shown)
	GA21676	-	Wheel Arm W/Grease Fitting, Bushings, and Seals, R.H.
	GD10991	2	Seal (Per Arm) (Included W/GA21677 and GA21676)
	GB0276	2	Bushing, 1" I.D. x 1 1/4" O.D. x 1" Long (Per Arm) (Included W/GA21677 and GA21676)
7	G10397801	1	Bushing, 1 x .656 x 12
8	G10871701	8	Hex Non-Serrated Cap Screw, M8 x 45
9	G10028701	1	Half Gauge Wheel
	G10871601	4	Hex Non-Serrated Cap Screw, M8 x 25
10	GD36713	2	Gauge Wheel Dust Shield
11	GA6171	1	Bearing
12	GD36709	1	Half Gauge Wheel
13	G10871801	12	Hex Flanged Lock Nut, Nylon Lock - M8
14	G10230	1	Lock Washer, 5/8"
15	G10010	1	Hex Head Cap Screw, 5/8"-11 x 3"
16	G10028601	1	Tire, 4 1/2" x 16
17	G10335001	6	Flanged Lock Nut, M8
18	G10334701	1	Hub
19	G10334901	1	Wheel Flange
20	G10335101	6	Screw, M8 x 30
21	G11386	6	Flat Washer, 5/16"
22	G10335201	1	Elastic Ring
23	G10334801	1	Wheel Flange
A	G10028801	-	Standard Gauge Wheel Complete (Items 8-13 and 16)
B	G10322501	-	Spoked Gauge Wheel Complete (Items 10-11 and 16-23)
C	G1K296	-	Gauge Wheel Arm Bushing and Seal Driver Kit, Includes: (1) Seal Driver, (1) Bushing Driver, (1) Instruction Sheet

(IP1581)

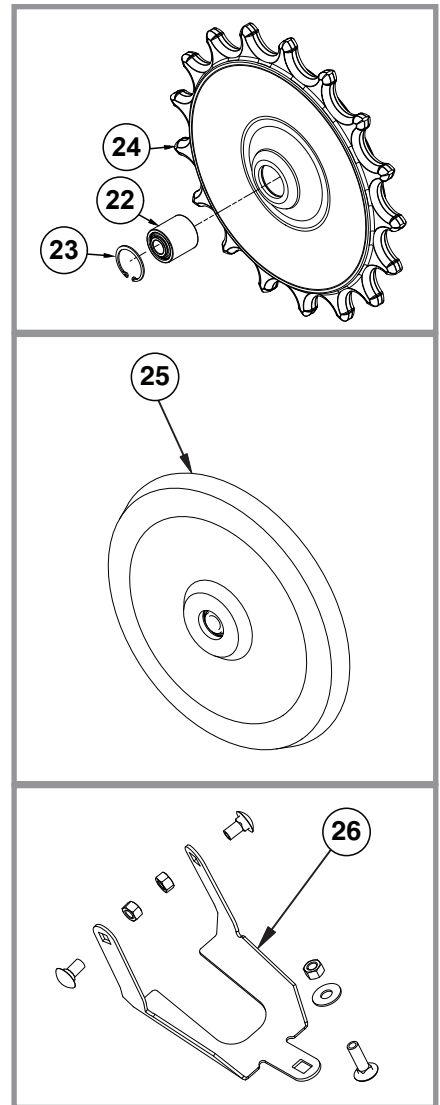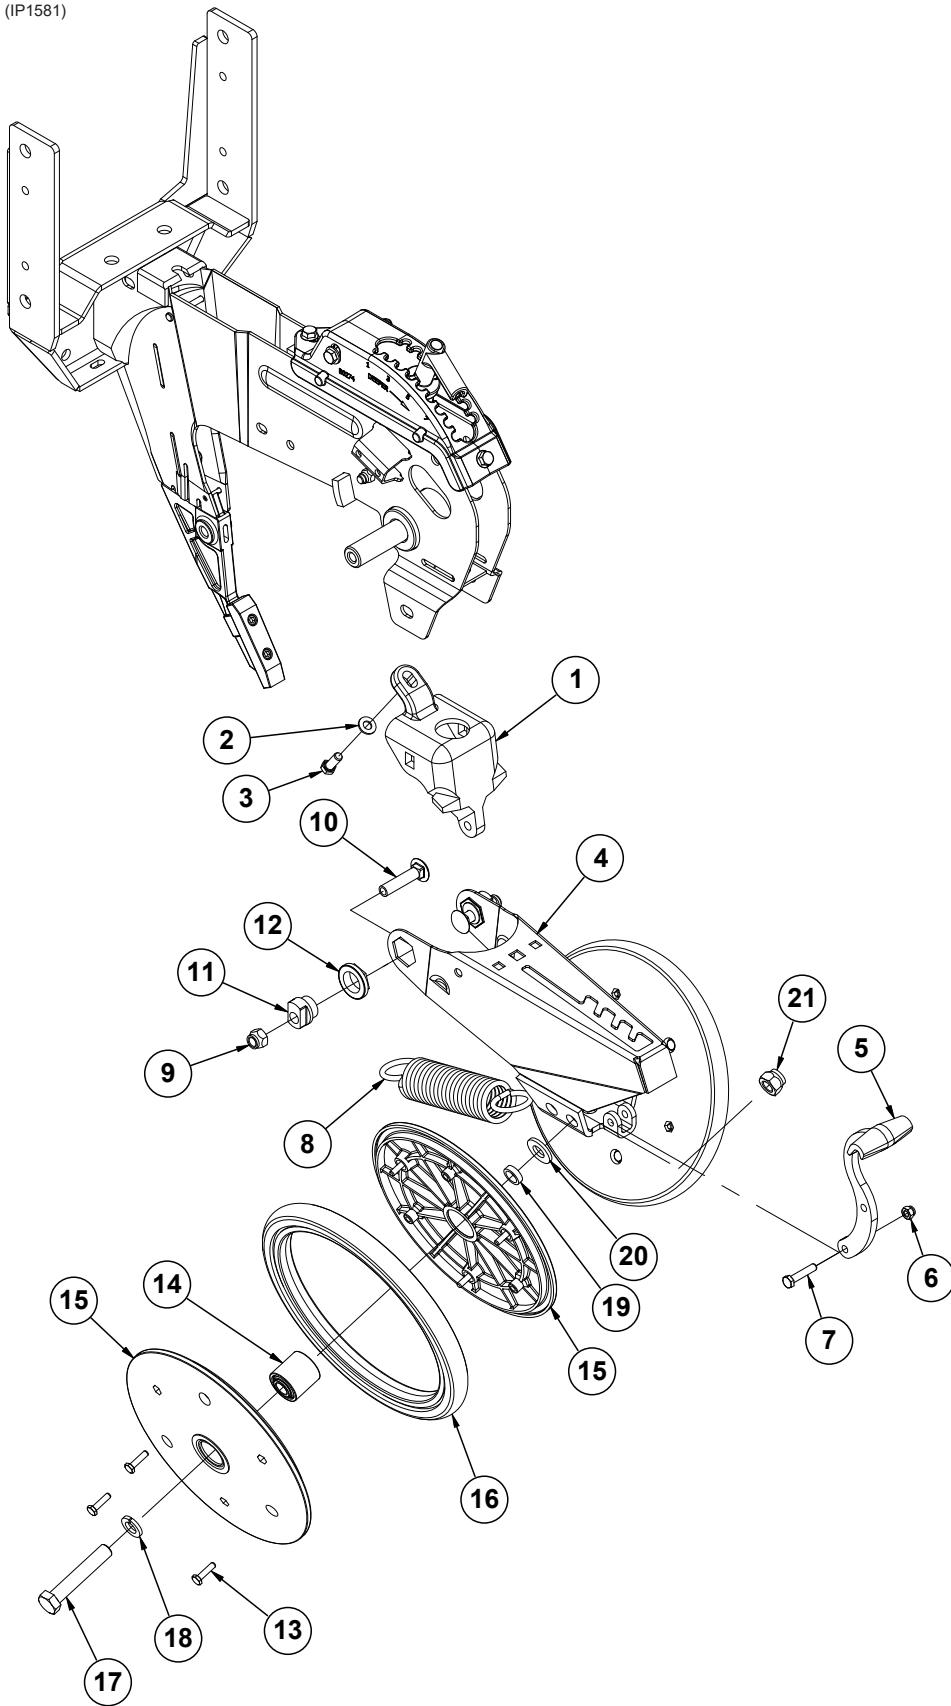


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	GB0268	1	Wheel Arm Mount
2	G11387	1	Flat Washer, $\frac{3}{8}$ " SAE
3	G10001	1	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x 1"
4	GA15197	1	Closing Wheel Arm
5	GB0254	1	Lever
6	G10109	1	Lock Nut, $\frac{5}{16}$ "-18, Grade 8
7	G10133	1	Hex Head Cap Screw, $\frac{5}{16}$ "-18 x $1\frac{1}{2}$ "
8	GD8460	1	Spring
9	G10111	2	Lock Nut, $\frac{1}{2}$ "-13
10	G11419	2	Carriage Bolt, $\frac{1}{2}$ "-13 x $2\frac{1}{4}$ "
11	GB0239	2	Eccentric Bushing
12	GB0282	2	Stepped Bushing
13	G10064	6	Hex Head Cap Screw, $\frac{1}{4}$ "-20 x 1"
14	GA6171	1	Bearing
15	GD9120	2	Nylon Half Wheel
16	GD1085	1	Rubber Tire, 1" x 12"
17	G10013	2	Hex Head Cap Screw, $\frac{5}{8}$ "-11 x $3\frac{1}{2}$ "
18	G10230	2	Lock Washer, $\frac{5}{8}$ "
19	GD1109	2	Bushing, $\frac{41}{64}$ " I.D. x $\frac{7}{8}$ " O.D. x $\frac{1}{4}$ " Long
20	G11391	2	Flat Washer, $\frac{5}{8}$ " SAE
21	G10107	2	Lock Nut, $\frac{5}{8}$ "-11
22	GA6171	1	Bearing
23	G11862	1	Internal Retaining Ring
24	GD36895	1	Spiked Closing Wheel
25	GA6597	1	Cast Iron Closing Wheel W/Bearing
	GA6171	1	Bearing
26	G1K345	-	Closing Wheel Shield Kit W/Hardware and Instruction
	GD26146	1	Closing Wheel Shield (Included W/G1K345)
	G10599	1	Carriage Bolt, $\frac{3}{8}$ "-16 x $1\frac{1}{4}$ " (Included W/G1K345)
	G10308	2	Carriage Bolt, $\frac{3}{8}$ "-16 x $\frac{3}{4}$ " (Included W/G1K345)
	G10101	3	Hex Nut, $\frac{3}{8}$ "-16 (Included W/G1K345)
	G10229	3	Lock Washer, $\frac{3}{8}$ " (Included W/G1K345)
	G11387	1	Hardened Washer, $\frac{3}{8}$ " SAE (Included W/G1K345)
A	GA6434	-	Rubber Closing Wheel Complete W/Bearing (Items 13-16)
B	GA26958	-	Spiked Closing Wheel (Items 22-24)

(IP1582)

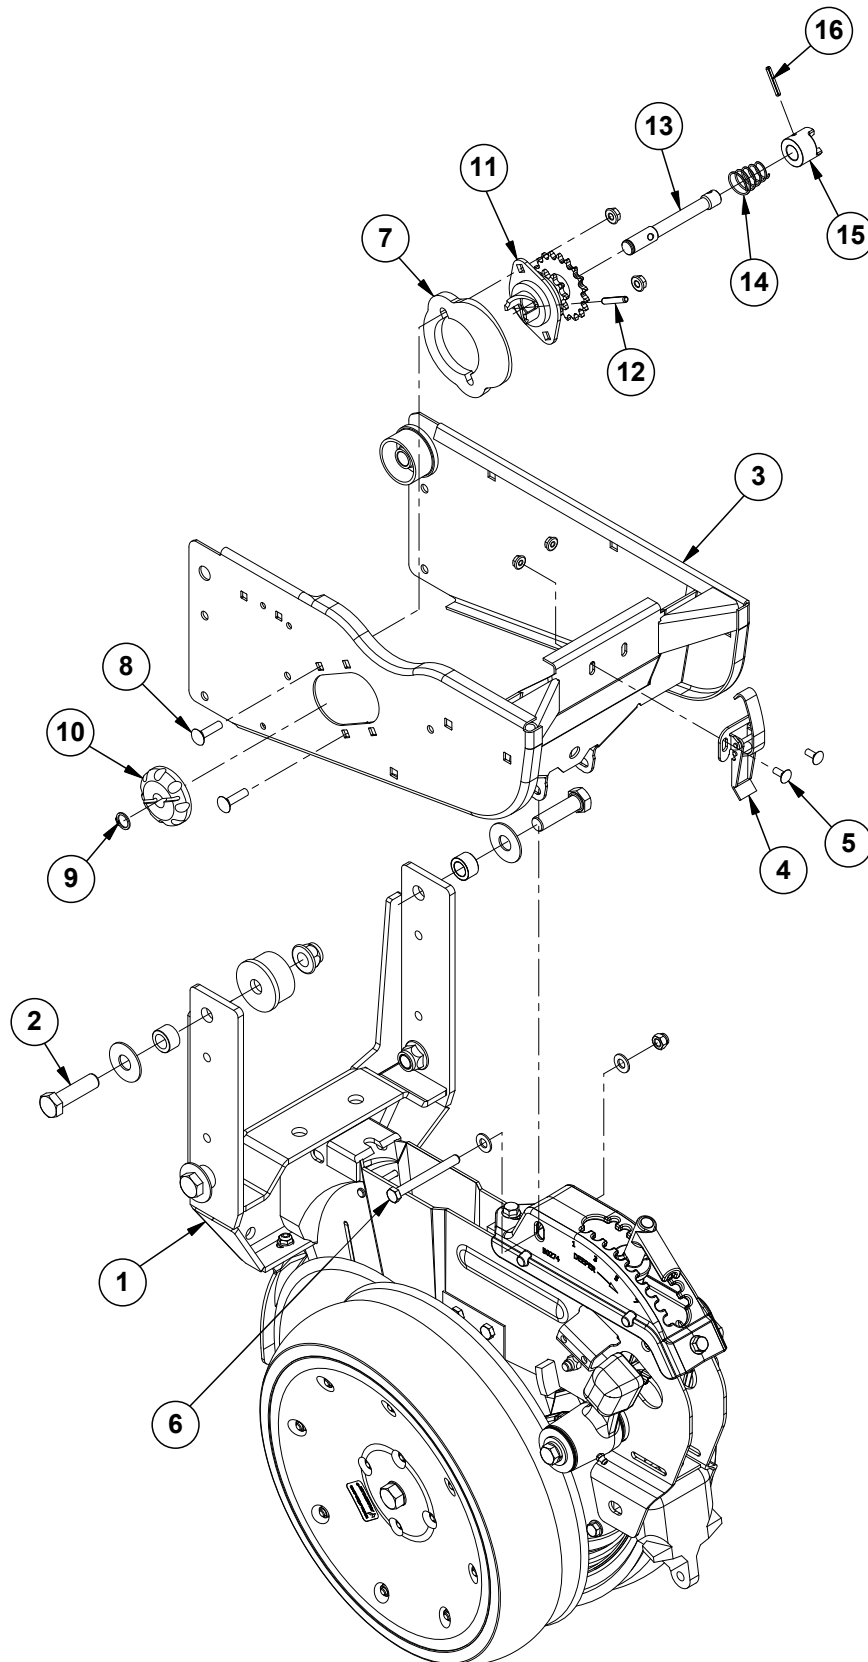


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	---	1	See "15" Seed Opener Disc Blade/Bearing Assembly and Scrapers" on page P6
2	G10752	2	Hex Head Cap Screw, $\frac{5}{8}$ "-18 x $2\frac{1}{4}$ "
3	G10329801	1	Hopper Support
4	GA2007	1	Hopper Hold Down Latch
5	G10309	2	Carriage Bolt, $\frac{1}{4}$ "-20 x $\frac{5}{8}$ ", Grade 2
	G10621	2	Serrated Flange Nut, $\frac{1}{4}$ "-20
6	G10061	1	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x $3\frac{1}{2}$ "
	G11387	2	Flat Washer, $\frac{3}{8}$ " SAE
	G10108	1	Lock Nut, $\frac{3}{8}$ "-16
7	GB0331	1	Clutch Adapter Plate
8	G10338	2	Carriage Bolt, $\frac{5}{16}$ "-18 x $1\frac{1}{4}$ "
	G10620	2	Serrated Flange Nut, $\frac{5}{16}$ "-18
9	G10567	1	External Retaining Ring, $\frac{5}{8}$ "
10	GD11239	1	Knob
11	GA10137	1	Double Sprocket and Bearing, Drive Clutch, 11/19 Tooth (Mechanical)
	GA12143	-	Double Sprocket and Bearing, Drive Clutch, 11/28 Tooth (Vacuum)
12	G10602	1	Spring Pin, $\frac{1}{4}$ " x $1\frac{1}{2}$ "
13	GD29507	1	Clutch Shaft
14	GD11413	1	Spring
15	GB0278	1	Coupler
16	G10546	1	Spring Pin, $\frac{3}{16}$ " x $1\frac{1}{4}$ "
17	GD17052	-	Vacuum Plug
A	GA10151	-	Seed Meter Clutch Assembly, 11/19 Tooth (Items 9-16) (Mechanical)
B	GA20640	-	Seed Meter Clutch Assembly, 11/28 Tooth (Items 9-16) (Vacuum)

(IP1583)

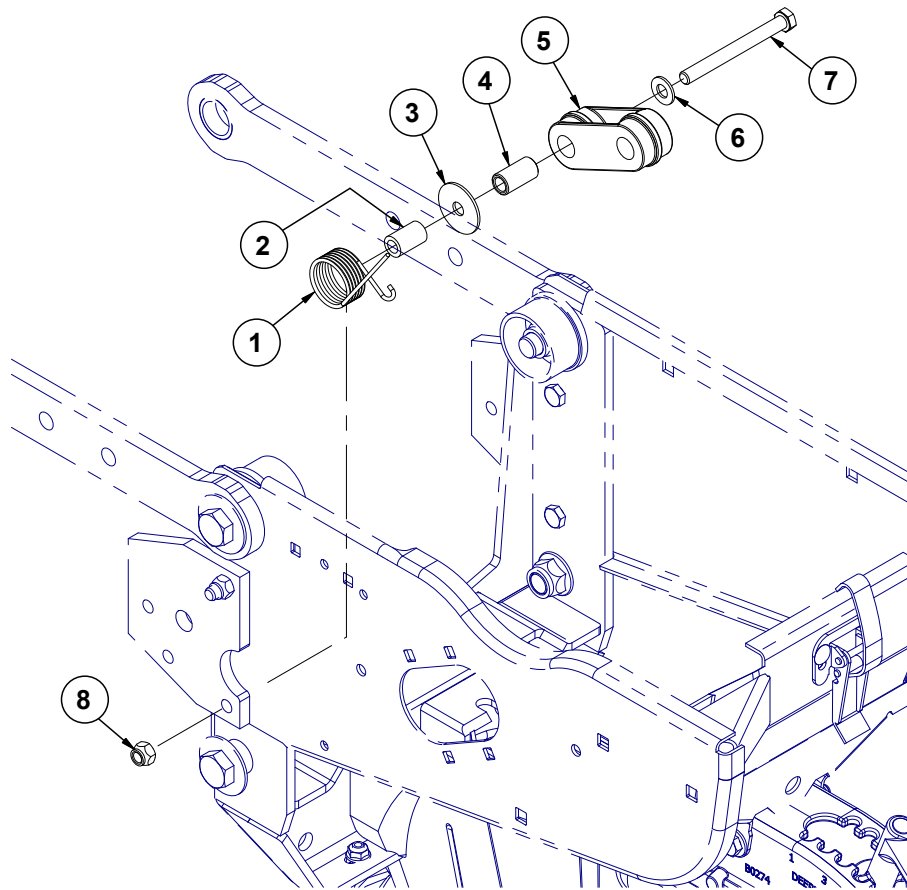


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	GD1065	1	Idler Spring
2	GD7318	1	Sleeve, 1" Long
3	G10201	1	Special Washer, $\frac{3}{8}$ " x 1 $\frac{1}{2}$ " O.D.
4	GD1026	1	Sleeve, 1 $\frac{3}{16}$ " Long
5	GD11962	1	Idler
6	G11387	1	Flat Washer, $\frac{3}{8}$ " SAE
7	G10326	1	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x 3 $\frac{3}{4}$ "
8	G10108	1	Lock Nut, $\frac{3}{8}$ "-16

(METR12/RU87e)

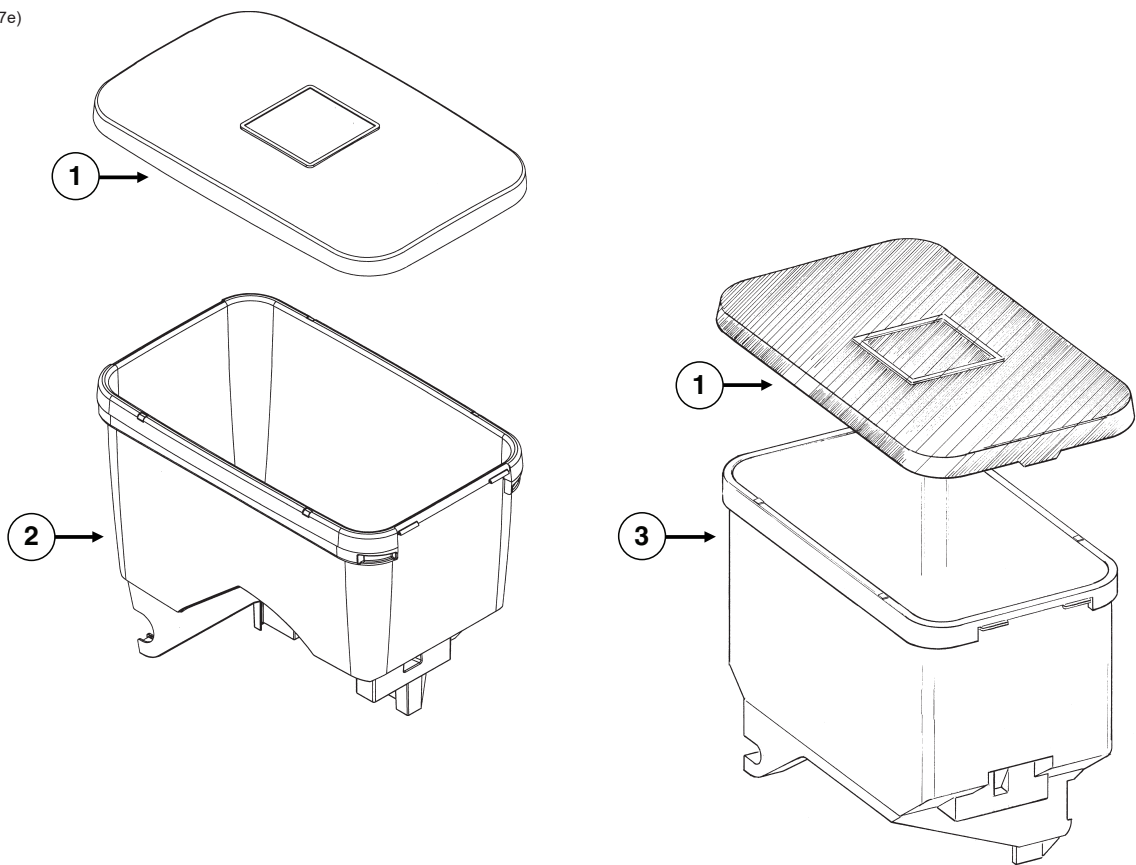


ITEM	PART NO.	QTY.	DESCRIPTION
1	GD11279	1	Lid
2	GA24873	1	Seed Hopper (Vacuum)
	GD12561	-	Threaded Insert, 5/16"-18 (Included W/GA20254)
3	GA9714	1	Seed Hopper, Reinforced (Mechanical)
	GD12561	-	Threaded Insert, 5/16"-18 (Included W/GA9714)

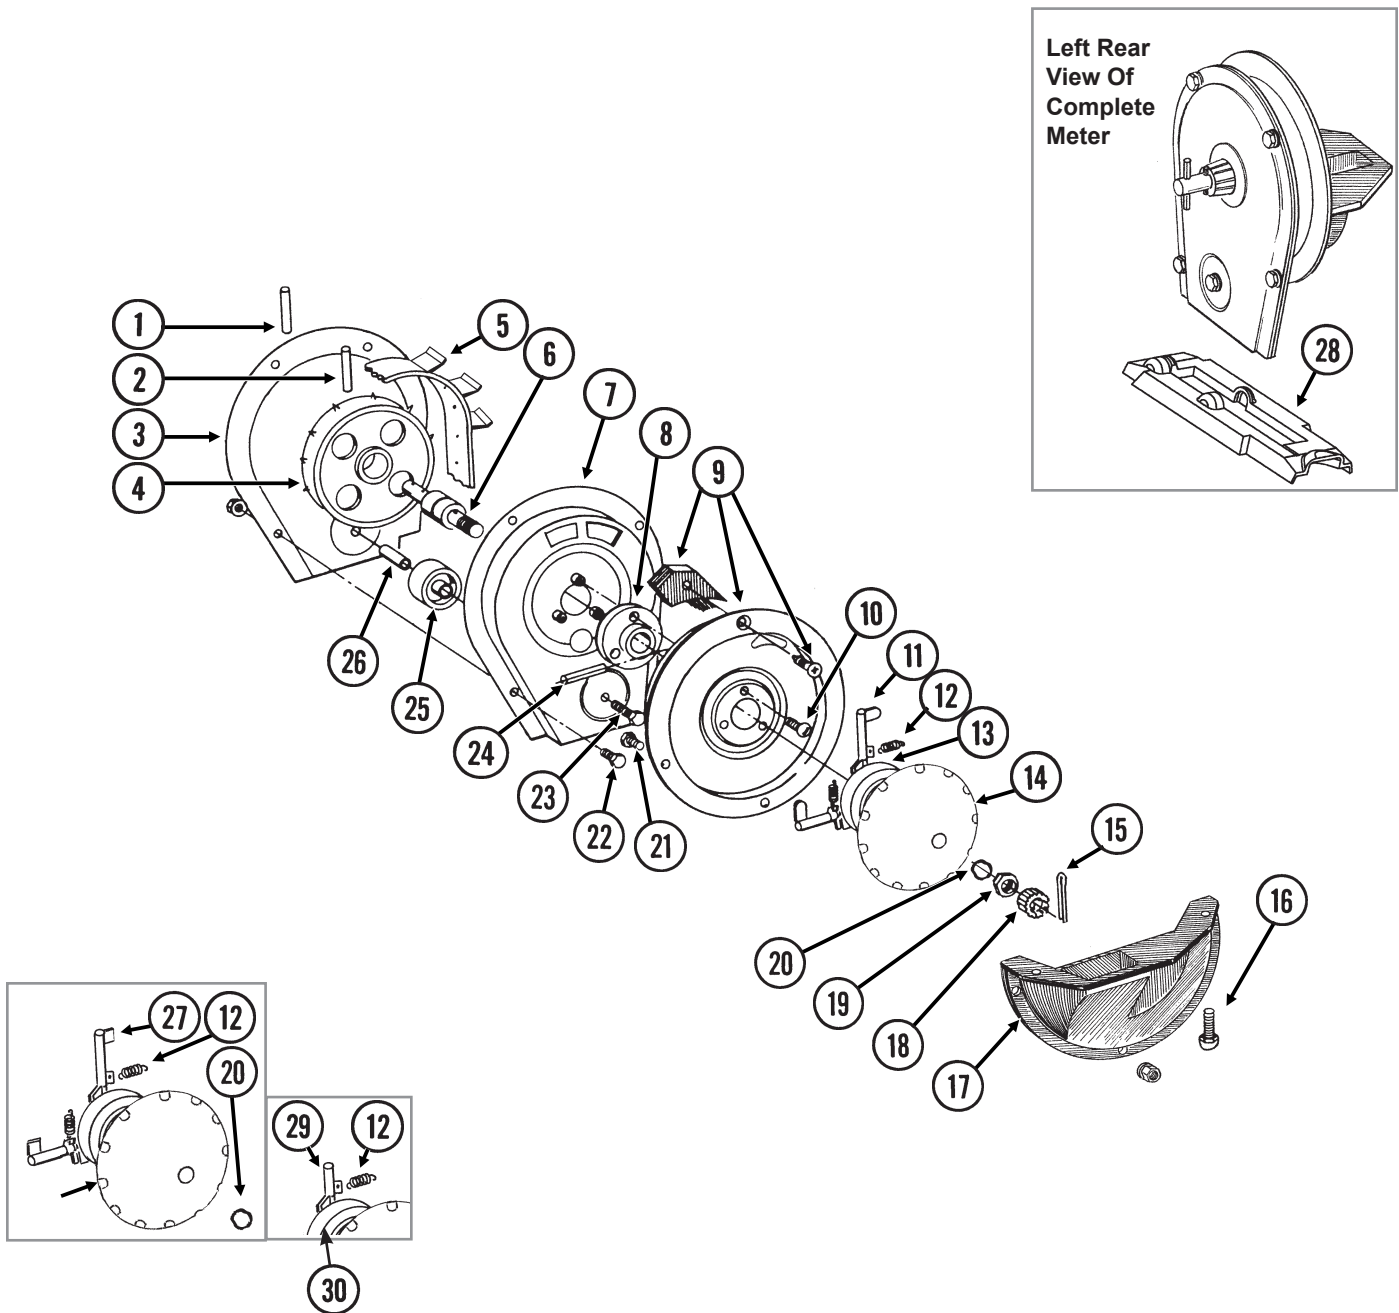


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	G10602	1	Spring Pin, 1/4" x 1 1/2"
2	G10604	1	Spring Pin, 3/16" x 1 1/2"
3	G10429301	1	Housing Cover
4	GD1041	1	Belt Drive Sprocket
5	GD11286	1	Seed Belt
6	GA2019	1	Bearing
7	G10429101	1	Conveyor Housing
8	GB0110	1	Bearing Housing
9	GR1569	-	Carrier Plate W/Brush and Screw (Corn)
	GR0664	-	Carrier Plate W/Brush and Screw (Sunflower)
	GA2020	-	Brush
	G10690	-	Rolling Thread Screw, No. 10 x 3/4"
10	G10401	3	Slotted Hex Washer Head Screw, No. 10-32 x 5/8"
11	GD18704	12	Finger, Corn
12	GD19790	12	Spring
13	GB0410	1	Cam
14	GD11528	1	Finger Holder (Corn and Sunflower - Used With GR1848)
	GD26594	-	Finger Holder (Corn and Sunflower - Used With GR2154)
15	G10470	1	Cotter Pin, 5/32" x 1"
16	G11009	2	Locking Thumbscrew, 5/16"-18 x 3/4"
17	GD36922	1	Seed Baffle
18	GD1083	1	Cover Nut
19	G10500	1	Jam Nut, 5/8"-18 UNF
20	GA8343	1	Wave Washer, 5/8" (Triple Wave)
21	G10020	3	Hex Head Cap Screw, 1/4"-20 x 5/8"
	G10323	3	Hex Flange Nut, 1/4"-20, No Serrations
22	G10022	5	Hex Head Cap Screw, 1/4"-20 x 1/2"
	G10621	6	Serrated Flange Nut, 1/4"-20
23	G10021	1	Hex Head Cap Screw, 1/4"-20 x 1 1/2"
	G10621	1	Serrated Flange Nut, 1/4"-20
24	G10603	1	Spring Pin, 1/4" x 1 1/4"
25	GD1042	1	Idler
26	GB0120	1	Bushing, 1 7/64" I.D. x 1 1/32" Long
27	GD19333	12	Finger, Oil Sunflower
28	GD15698	1	Shank Cover, Finger Pickup Seed Meter
29	GD11787	-	Half Rate Blank Finger
30	GB0410	-	Cam (Sunflower)
A	GR1848	-	Finger Assembly, Corn (Items 11-14 and 20)
B	GR2154	-	Finger Assembly, Sunflower (Items 12, 14, 20, 27, and 30)
C	G10846X	-	Corn Meter Assembly (Items 1-26 and 28)
D	900-01117	-	Sunflower Meter Assembly (Items 1-10, 12, 14-15, 17-27, and 30)

RUA037/RUA056/RUA057(RU14f)

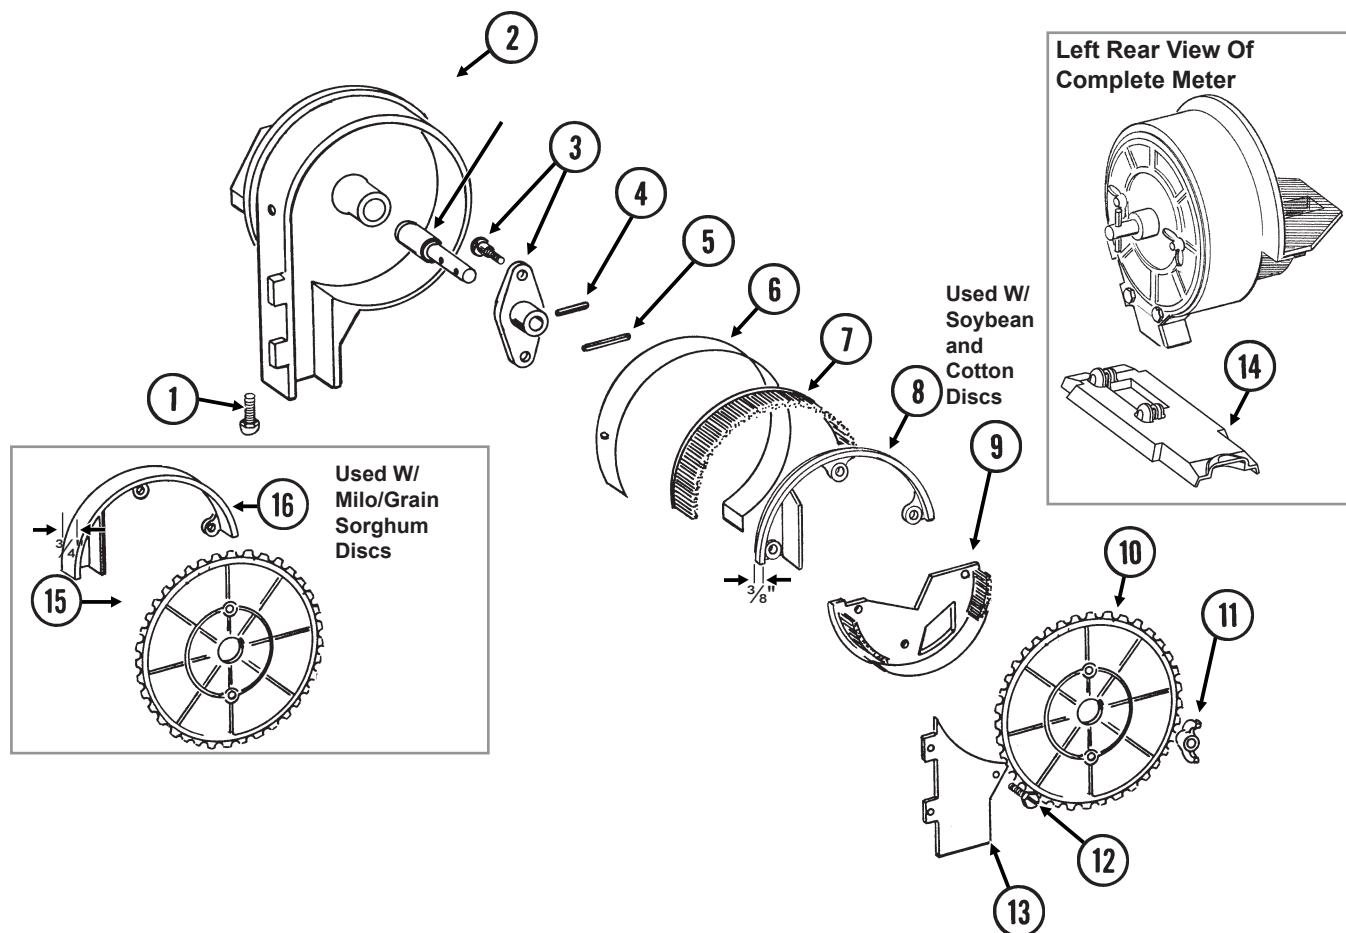

ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	G11009	2	Locking Thumbscrew, $\frac{5}{16}$ "-18 x $\frac{3}{4}$ "
2	GA18208	1	Housing W/Bearing
	GA5698	-	Bearing (Included W/GA18208)
3	GA6038	1	Hub W/Shoulder Bolts
	GD1755	-	Shoulder Bolt, $\frac{1}{4}$ "-20 (2 Used)
4	G10603	1	Spring Pin, $\frac{1}{4}$ " x $1\frac{1}{4}$ "
5	G10602	1	Spring Pin, $\frac{1}{4}$ " x $1\frac{1}{2}$ "
6	GD8778	1	Wear Strip
7	GA5699	1	Upper Brush
8	GD11122	1	Upper Brush Retainer (Used W/Soybean and Cotton Discs)
9	GA5834	1	Lower Brush
10	GA5794	-	Seed Disc, Soybean, 60 Cell, Black Color-Coded
	GA6184	-	Seed Disc, Specialty Soybean, 48 Cell, Dark Blue Color-Coded
	GA5796	-	Seed Disc, Cotton, Acid-Delinted, 30 Cell, White Color-Coded
	GA6168	-	Seed Disc, Large Cotton, Acid-Delinted, 36 Cell, Tan Color-Coded
	GA6478	-	Seed Disc, High-Rate Cotton, Acid-Delinted, 48 Cell, Light Green Color-Coded
	GA6182	-	Seed Disc, Hill-Drop Cotton, Acid-Delinted, 12 Cell, Brown Color-Coded
	GA7255	-	Seed Disc, Small Hill-Drop Cotton, Acid-Delinted, 12 Cell, Dark Green Color-Coded
11	G10531	2	Wing Nut W/Nylon Insert, $\frac{1}{4}$ "-20
12	G11151	9	Hex Washer Head Screw, No. 10-16 x $\frac{1}{2}$ "
	G10634	-	Slotted Tap Screw, No. 10-24 x $\frac{5}{8}$ " (Use As Required)
13	GD7878	1	Cover
14	GD15699	1	Shank Cover, Brush-Type Seed Meter
15	GA5982	-	Seed Disc, Small Milo/Grain Sorghum, 30 Cell, Red Color-Coded
	GA6187	-	Seed Disc, Large Milo/Grain Sorghum, 30 Cell, Light Blue Color-Coded
	GA5795	-	Seed Disc, High-Rate Small Milo/Grain Sorghum, 60 Cell, Red Color-Coded
	GA6633	-	Seed Disc, High-Rate Large Milo/Grain Sorghum, 60 Cell, Yellow Color-Coded
16	GD8237	-	Upper Brush Retainer (Used W/Milo/Grain Sorghum Discs)
A	700-01079	-	Brush Meter (Items 1-9 and 11-14)


(IP1507)

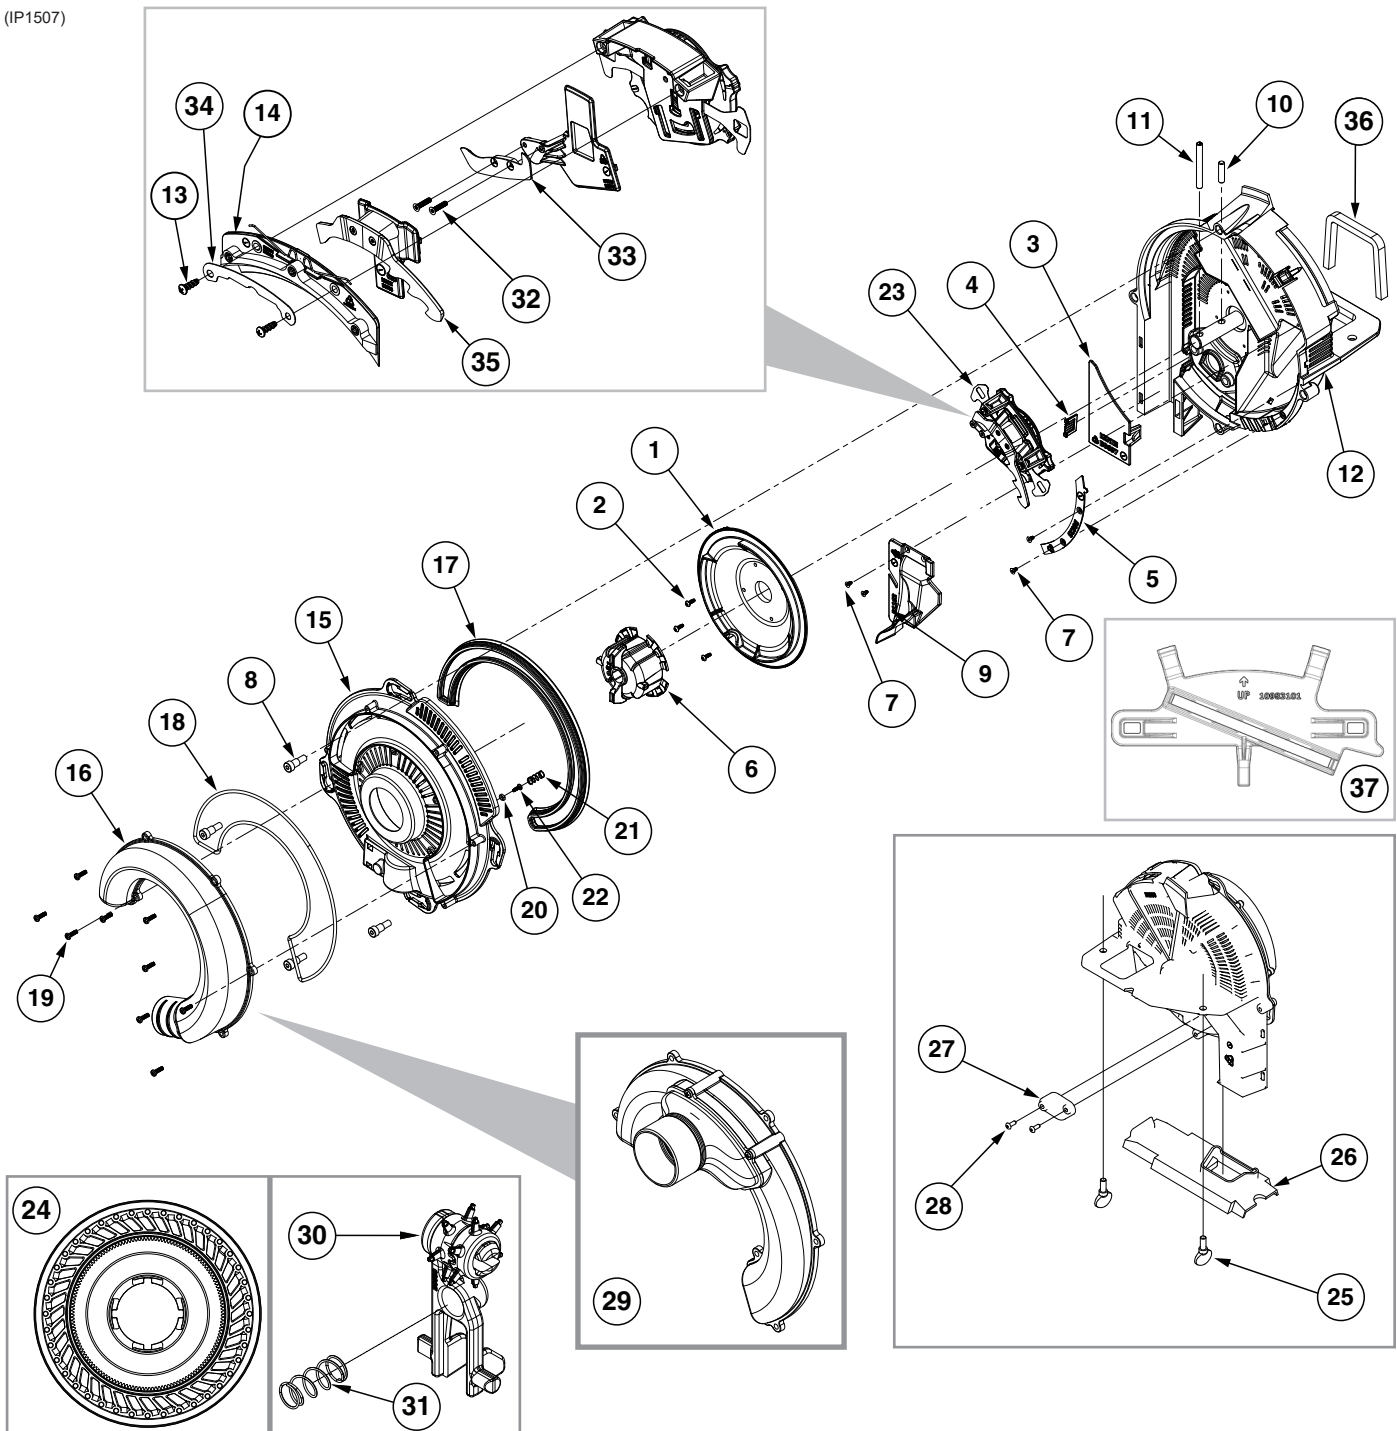


ITEM	PART NO.	QTY.	DESCRIPTION
1	GB0815	1	Shield
2	G11619	3	Phillips Pan Head Tapping Screw, No. 6-19 x $\frac{3}{8}$ "
3	GB0697	1	Chute Cover
4	GB0780	1	Brush
5	GB0823	1	Baffle
6	GB1147	1	Disc Hub
7	G11618	4	Torx Flat Head Tapping Screw, No. 6-19 x $\frac{1}{4}$ "
8	G11172	4	Hex Socket Head Shoulder Screw, $\frac{1}{4}$ "-20 x $\frac{3}{8}$ ", Stainless Steel

ITEM	PART NO.	QTY.	DESCRIPTION
9	GA24878	1	Brush Assembly
10	G11448	1	Pin, 1/4" x 1"
11	G10475	1	Spring Pin, 1/4" x 2 1/4"
12	GA24877	1	Meter Housing W/Bearing
13	G11578	2	Phillips Pan Head Tapping Screw, No. 8-18 x 1/2"
14	GA24676	1	Singulator Guide Assembly
15	GB0920	1	Cover
16	GB0818	1	Vacuum Port, Pull Row Unit
17	GB0676	1	Lip Seal
18	GD26593	1	Gasket Housing
19	G11556	9	Phillips Pan Head Tapping Screw, 6-19 x 1/2"
20	GB0907	1	Retainer Spring
21	G10483101	1	Compression Spring
22	G11619	1	Phillips Pan Head Tapping Screw, No. 6-19 x 3/8"
23	GA24752	1	Singulator Assembly (Includes Items 13 and 14)
24	G11152X	-	Seed Disc, Corn, 40 Cell, Light Blue Color-Coded, Ejector Wheel, and Spring
	G11046X	-	Seed Disc, 83 Cell, Ejector Wheel, and Spring
	G11042X	-	Seed Disc, Wheat, 54 Cell, Ejector Wheel, and Spring
	G11332X	-	Seed Disc, Wheat, 231 Cell, Red Color-Coded, Ejector Wheel, and Spring
	G11047X	-	Seed Disc, Soybean, 120 Cell, Black Color-Coded, Ejector Wheel, and Spring
	G11048X	-	Seed Disc, Soybean, 60 Cell, Black Color-Coded, Ejector Wheel, and Spring
	G11154X	-	Seed Disc, Sugar Beets/Milo, Dark Orange Color-Coded, Ejector Wheel, and Spring
	G11153X	-	Seed Disc, Sunflower, 40 Cell, Gray Color-Coded, Ejector Wheel, and Spring
	G11105X	-	Seed Disc, Cotton, 60 Cell, Green Color-Coded, Ejector Wheel, and Spring
	G11106X	-	Seed Disc, Black Turtle and Navy Edible Bean and Popcorn, 60 Cell, Brown Color-Coded, Ejector Wheel, and Spring
	G11107X	-	Seed Disc, Pinto and Great Northern Edible Beans and Low-Rate Soybean, 60 Cell, Dark Blue Color Coded, Ejector Wheel, and Spring
	GB1237	-	Anti-Static Blank Seed Disc
	GB1231	-	Blank Seed Disc
25	G11009	2	Locking Thumbscrew, 5/16"-18 x 3/4"
26	GB0926	1	Shank Cover
27	GD28631	1	Cover Plate
28	G11281	2	Hex Button Head Cap Screw, 10-24 x 1/2"
29	GA20111	1	Vacuum Port, Push Row Unit
30	G10665101	-	Ejector Arm, Corn
	G10483401	-	Ejector Arm, Soybean (120 Cell)
	G10483201	-	Ejector Arm, Soybean (60 Cell)
	G10665001	-	Ejector Arm, Sunflower
	G10664901	-	Ejector Arm, Beets/Milo
	G10614301	-	Ejector Arm, Black Turtle, Navy, Pinto, and Great Northern Edible Bean, Popcorn, and Low-Rate Soybean, Cotton
	GA25550	-	Ejector Arm, Rapeseed
	GA26989	-	Ejector Arm, Wheat (54 Cell)
	G10936101	-	Ejector Arm, Wheat (231 Cell)
31	G10483101	-	Compression Spring
32	G11693	2	Torx Flat Head Machine Screw, No. 4-40 x 1/2"
33	GB0921	1	Lower Blade
34	GD29657	1	Retainer
35	GB0958	1	Outer Blade
36	GD34774	1	Meter Gasket
37	G10983301	1	Wheat Brush Singulator
	G10983101	1	Wheat Brush Mount (Included W/G10983301)
	G10983201	1	Brush (Included W/G10983301)
A	G9903X	-	Vacuum Meter Assembly, Pull Row Unit (Excludes Items 24 and 29-31)
B	G9897X	-	Vacuum Meter Assembly, Push Row Unit (Excludes Items 16, 24, and 30-31)
C	GA20622	-	Cover Assembly (Items 15-22)

(A26319)

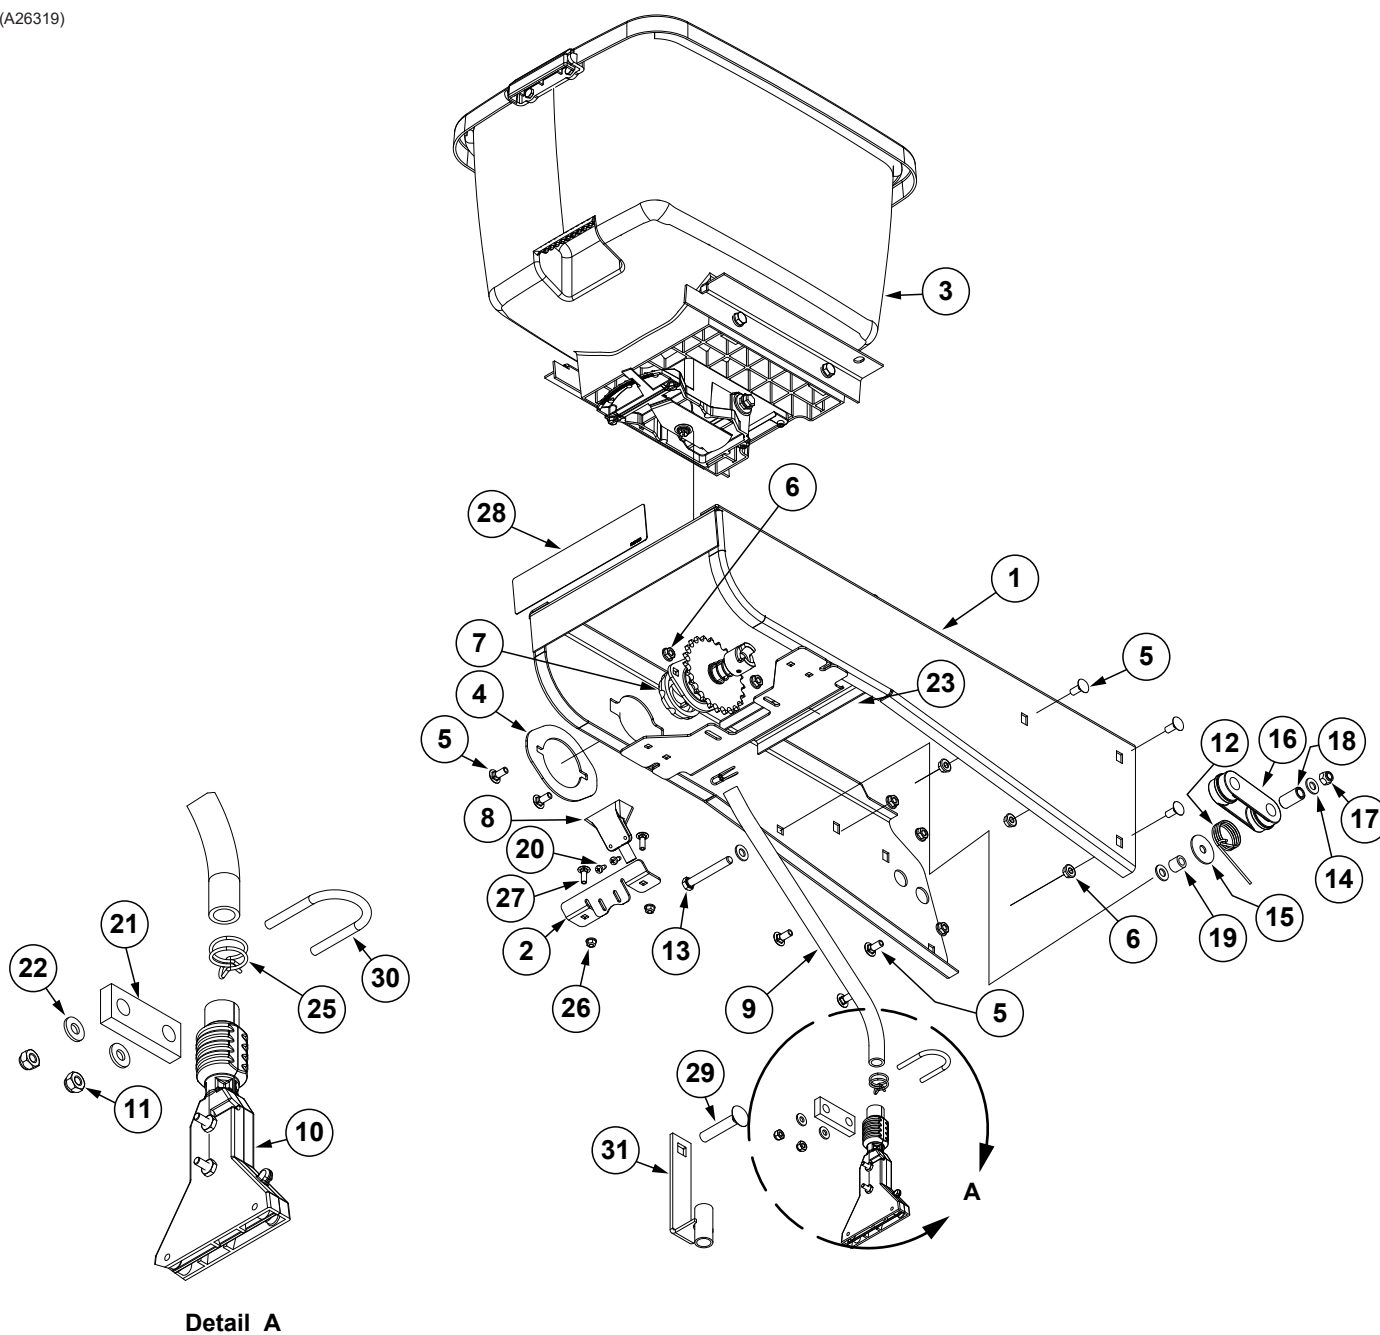


Detail A

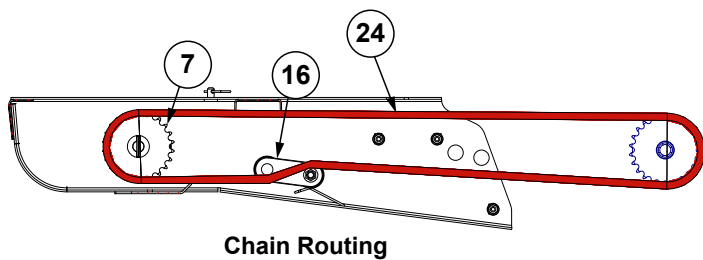

Chain Routing


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	A26287	1	Hopper Panel Extension (Non-Stock Item)
2	GD36277	1	Funnel Bracket
3	---	-	See "Granular Chemical Hopper and Hopper Panel Extension" on page P24
4	GD11305	1	Plate
5	G10312	8	Carriage Bolt, $\frac{5}{16}$ "-18 x $\frac{3}{4}$ "
6	G10620	8	Serrated Flange Nut, $\frac{5}{16}$ "-18
7	---	1	See "Granular Chemical Meter and Meter Drive" on page P25
8	GD2423	1	Funnel
9	GD2947	1	Hose, $\frac{7}{16}$ " x 28"
10	GA6907	1	Slope-Compensating Bander W/Hardware (4 $\frac{1}{2}$ " Band Width)
	G10864	1	Uni-Clamp (Included W/GA6907)
	G10757	2	Pan Head Screw, No. 10-32 x 1 $\frac{1}{4}$ " (Included W/GA6907)
	G10758	2	Hex Nut, No. 10-32 (Included W/GA6907)
11	G10110	2	Lock Nut, $\frac{1}{4}$ "-20, Grade B
12	GD11219	1	Spring
13	G10325	1	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x 2 $\frac{3}{4}$ "
14	G11387	3	Flat Washer, $\frac{3}{8}$ " SAE
15	G10201	1	Special Washer, $\frac{3}{8}$ " x 1 $\frac{1}{2}$ " O.D.
16	GD11962	1	Idler
17	G10108	1	Lock Nut, $\frac{3}{8}$ "-16
18	GD1026	1	Sleeve, 1 $\frac{3}{16}$ " Long
19	GD2971-10	1	Sleeve, $\frac{9}{16}$ " Long
20	G10966	2	Phillips Head Self-Tapping Screw, No. 10 x 1/2"
21	GD10984	1	Spacer
22	G11385	2	Flat Washer, $\frac{1}{4}$ " SAE
23	G10670	2	Hair Pin Clip, No. 3
24	G3303-114	1	Chain, No. 41, 114 Pitch Including Connector Link (Mechanical)
	G3303-108	1	Chain, No. 41, 108 Pitch Including Connector Link (Vacuum)
	GR0196	1	Connector Link, No. 41
25	G11209	2	Wire Hose Clamp, $\frac{3}{4}$ "
26	G10621	2	Serrated Flange Nut, $\frac{1}{4}$ "-20
27	G10310	2	Carriage Bolt, $\frac{1}{4}$ "-20 x $\frac{3}{4}$ ", Grade 2
28	---	-	See "Decals, Paint, and Miscellaneous" on page P140
29	G10315	1	Carriage Bolt, $\frac{1}{2}$ "-13 x 2 $\frac{1}{2}$ " (Replaces Existing $\frac{1}{2}$ " x 2 $\frac{1}{4}$ " Hardware)
30	GD10963	1	U-Bolt, 1 $\frac{1}{2}$ " x 1 $\frac{5}{16}$ " x $\frac{1}{4}$ "-20
31	GA6741	1	Bracket (Straight Drop In-Furrow)

(METR14d)

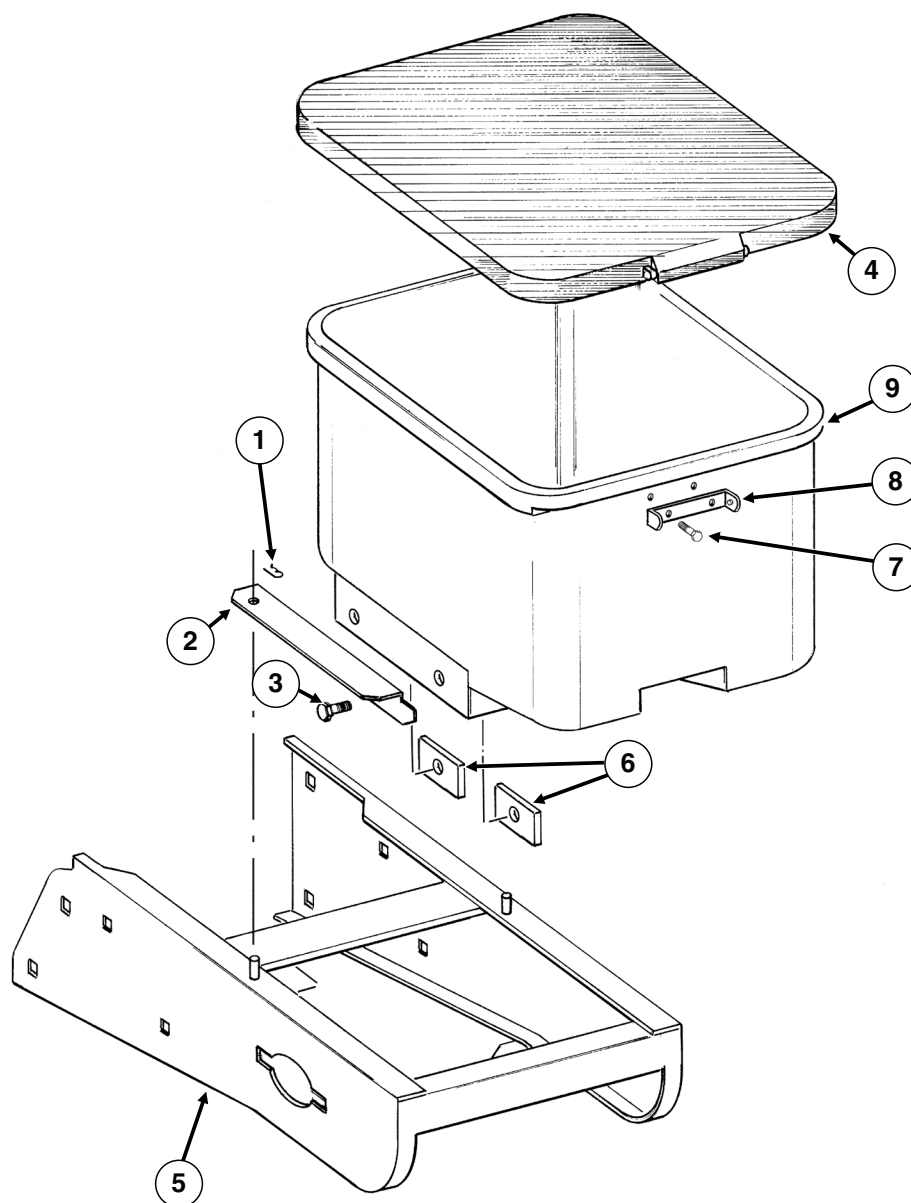


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	G10670	2	Hair Pin Clip, No. 3
2	GD1059L	1	Support, L.H. (Shown)
	GD1059R	1	Support, R.H.
3	G10002	4	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x $\frac{3}{4}$ "
	G10229	4	Lock Washer, $\frac{3}{8}$ "
4	GA4444	1	Lid
5	GA26287	1	Hopper Panel Extension (Non-Stock Item)
6	GD11424	4	Block
7	G10023	2	Hex Head Cap Screw, $\frac{1}{4}$ "-20 x $\frac{3}{4}$ "
	G10621	2	Serrated Flange Nut, $\frac{1}{4}$ "-20
8	GD1060	1	Hinge
9	GA8371	1	Hopper

RUA051/RUB028(RU91a)

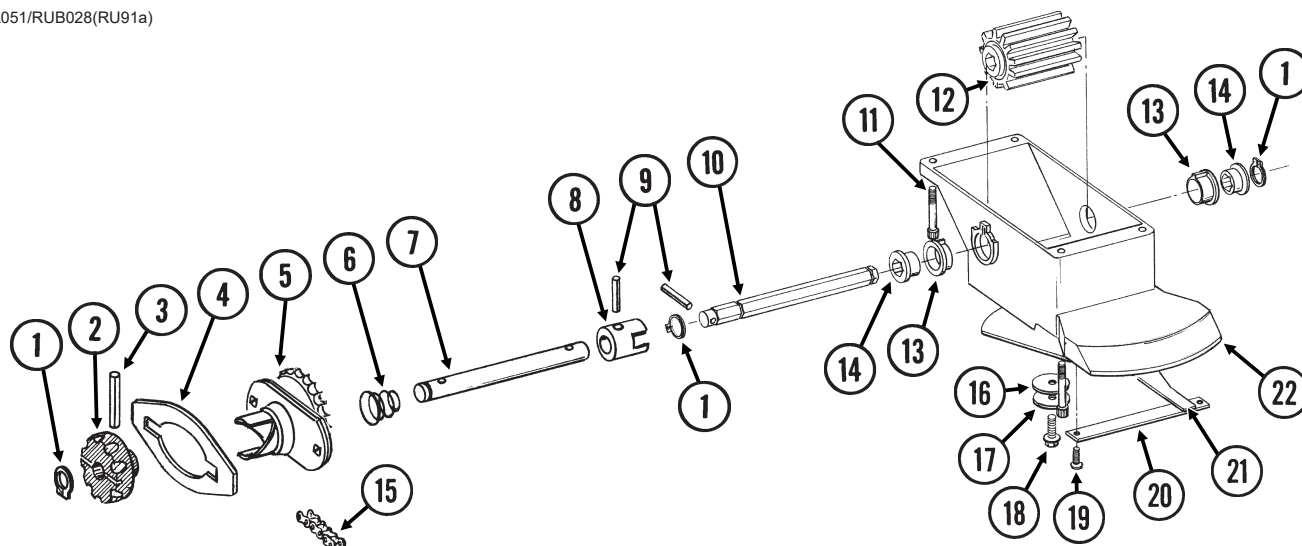


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	G10567	3	External Retaining Ring, 5/8"
2	GD11239	1	Knob
3	G10602	1	Spring Pin, 1/4" x 1 1/2"
4	---	-	See "Granular Chemical Hopper and Hopper Panel Extension" on page P24
5	GA8364	1	Sprocket and Bearing, Drive Clutch, 24 Tooth
6	GD11413	1	Spring
7	GD11240	1	Shaft
8	GB0278	1	Coupler
9	G10546	2	Spring Pin, 3/16" x 1 1/4"
10	GD11297	1	Shaft
11	G11793	4	Hex Socket Head Cap Screw, No. 10-24 x 7/8"
12	GD7148	1	Feed Roller, Hex Bore
13	GB0115	2	Bearing
14	GD7258	2	Hex Bushing
15	G3303-114	1	Chain, No. 41, 114 Pitch Including Connector Link
	GR0196	1	Connector Link, No. 41
16	G10660	1	Wave Washer, 1/2"
17	G11385	1	Flat Washer, 1/4" SAE
18	G10570	1	Slotted Hex Self-Tapping Screw, 1/4"-20 x 3/4"
19	G11073	2	Slotted Hex Self-Tapping Screw, No. 10 x 3/8"
20	GD1061	1	Support Strap
21	GD1063	1	Metering Gate
22	GB0116	1	Granular Housing
A	GA8326	-	Granular Chemical Meter Complete (Items 1, 9, 10, 12-14 and 16-22)
B	GA8366	-	Granular Chemical Meter Clutch (Items 1-3 and 5-9)

(IP1202)

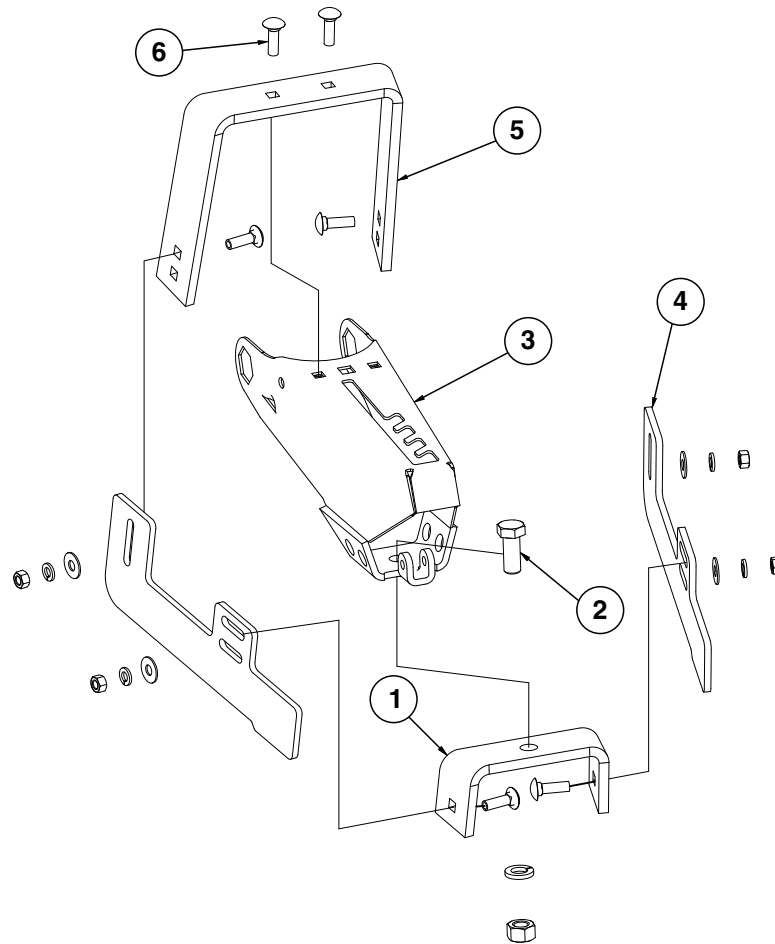


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	GD11509	1	Rear Bracket
2	G10007	1	Hex Head Cap Screw, $\frac{5}{8}$ "-11 x 1 $\frac{1}{2}$ "
	G10230	1	Lock Washer, $\frac{5}{8}$ "
	G10104	1	Hex Nut, $\frac{5}{8}$ "-11
3	GA15197	1	Closing Wheel Arm
4	GD11313	2	Blade
5	GD11508	1	Front Bracket
6	G10599	6	Carriage Bolt, $\frac{3}{8}$ "-16 x 1 $\frac{1}{4}$ "
	G10229	6	Lock Washer, $\frac{3}{8}$ "
	G11387	6	Flat Washer, $\frac{3}{8}$ " SAE
	G10101	6	Hex Nut, $\frac{3}{8}$ "-16
A	G7566X	-	Drag Closing Attachment Complete (Items 1-6)

(IP1279)

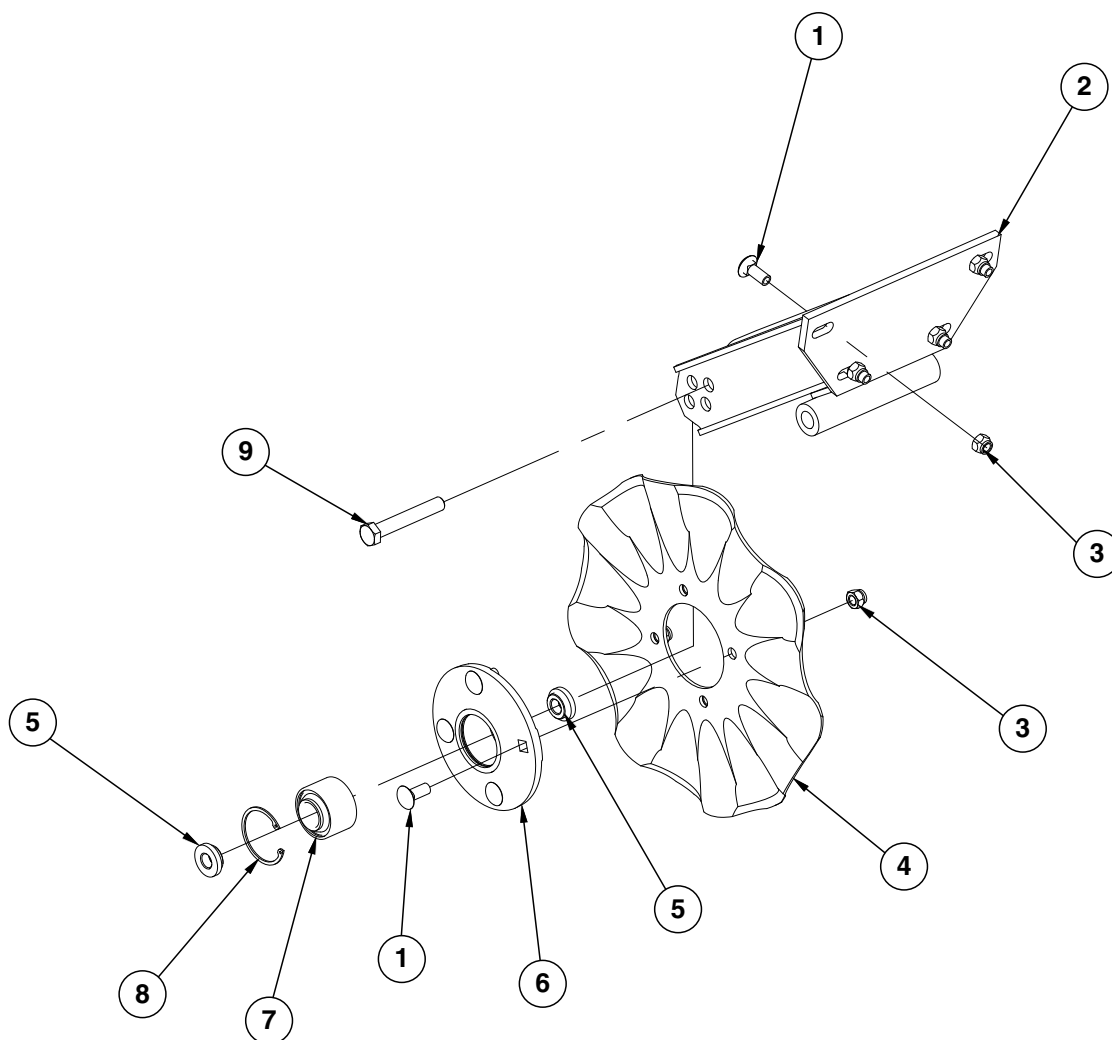


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	G10574	8	Carriage Bolt, 1/2"-13 x 1 1/4"
2	GA24239	1	Arm
3	G10111	8	Lock Nut, 1/2"-13
4	GD7803	1	Disc Blade, Fluted, 1", 8 Flutes (Shown)
	GD7804	-	Disc Blade, Bubbled, 1"
	GD9254	-	Disc Blade, Fluted, 3/4", 13 Flutes
5	GD11677	2	Adapter
6	GA8641	1	Hub W/Bearing And Retaining Ring (Includes items 7 and 8)
7	GA8603	1	Bearing, Double Row
8	GD19292	1	Retaining Ring (Square), 2 7/16"
9	G10036	1	Hex Head Cap Screw, 5/8"-11 x 4"
	G10107	1	Lock Nut, 5/8"-11

(RU103dd)

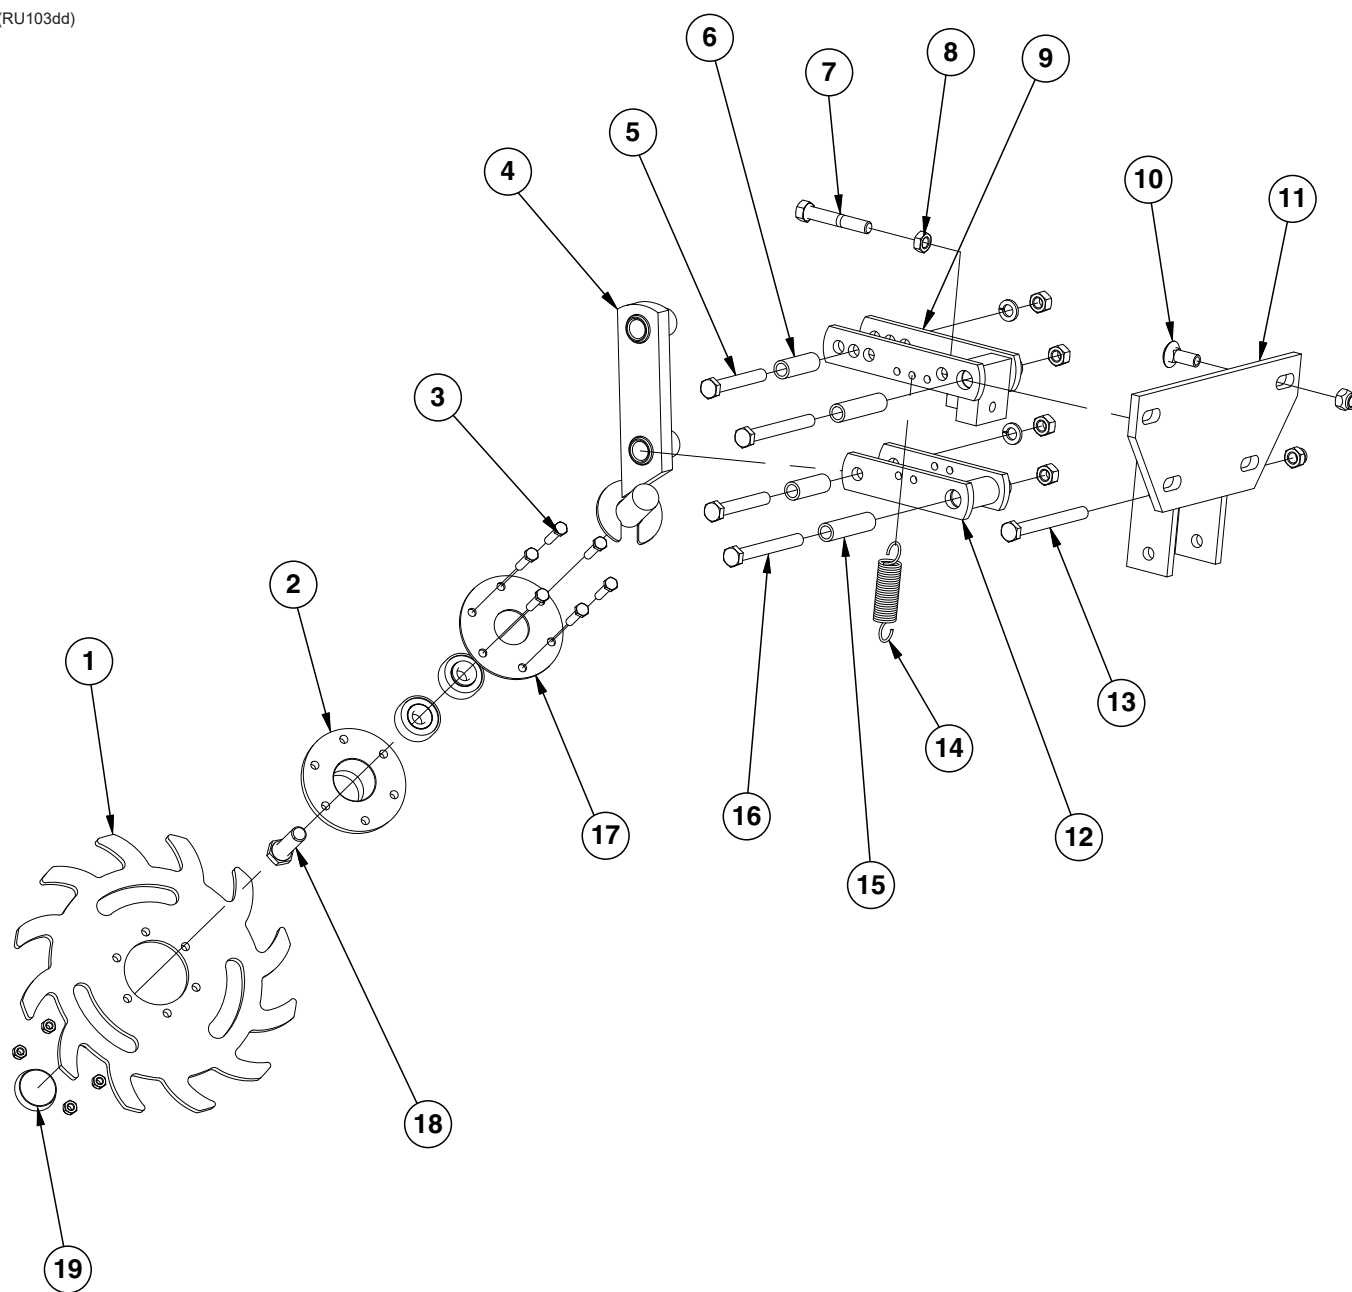

ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	GB0387	1	Wheel, 12 Tine, 3/8" x 12"
2	GA5654 GA2014	1 -	Hub W/Bearings Bearing
3	G10133 G10109	6 6	Hex Head Cap Screw, 5/16"-18 x 1 1/2" Lock Nut, 5/16"-18, Grade 8
4	GA6838	1	Wheel Mount
5	G10033 G10228 G10102	2 2 2	Hex Head Cap Screw, 1/2"-13 x 3 1/2" Lock Washer, 1/2" Hex Nut, 1/2"-13
6	GD9720	2	Spacer, 1/2" x 2 3/16" Long
7	G10371	1	Hex Head Cap Screw, 1/2"-13 x 3", Full Thread
8	G10501	1	Hex Jam Nut, 1/2"-13, Grade 2
9	GA6833	1	Upper Link
10	G10574 G10111	4 4	Carriage Bolt, 1/2"-13 x 1 1/4" Lock Nut, 1/2"-13
11	GA6832	1	Mount
12	GA6834	1	Lower Link
13	G10348 G10111	1 1	Hex Head Cap Screw, 1/2"-13 x 5" (Lockup Bolt) Lock Nut, 1/2"-13
14	GD5857	2	Spring
15	GD9715	2	Spacer, 1/2" x 3" Long
16	G10045 G10228 G10102	2 2 2	Hex Head Cap Screw, 1/2"-13 x 4 1/2" Lock Washer, 1/2" Hex Nut, 1/2"-13
17	GD9724	1	Backing Plate
18	G10006	1	Hex Head Cap Screw, 5/8"-11 x 2 1/4"
19	GD1132	1	Dust Cap
A	GA12236	-	Wheel Assembly, 12 Tine, R.H. (Items 1-3 and 18)

(IP1468)

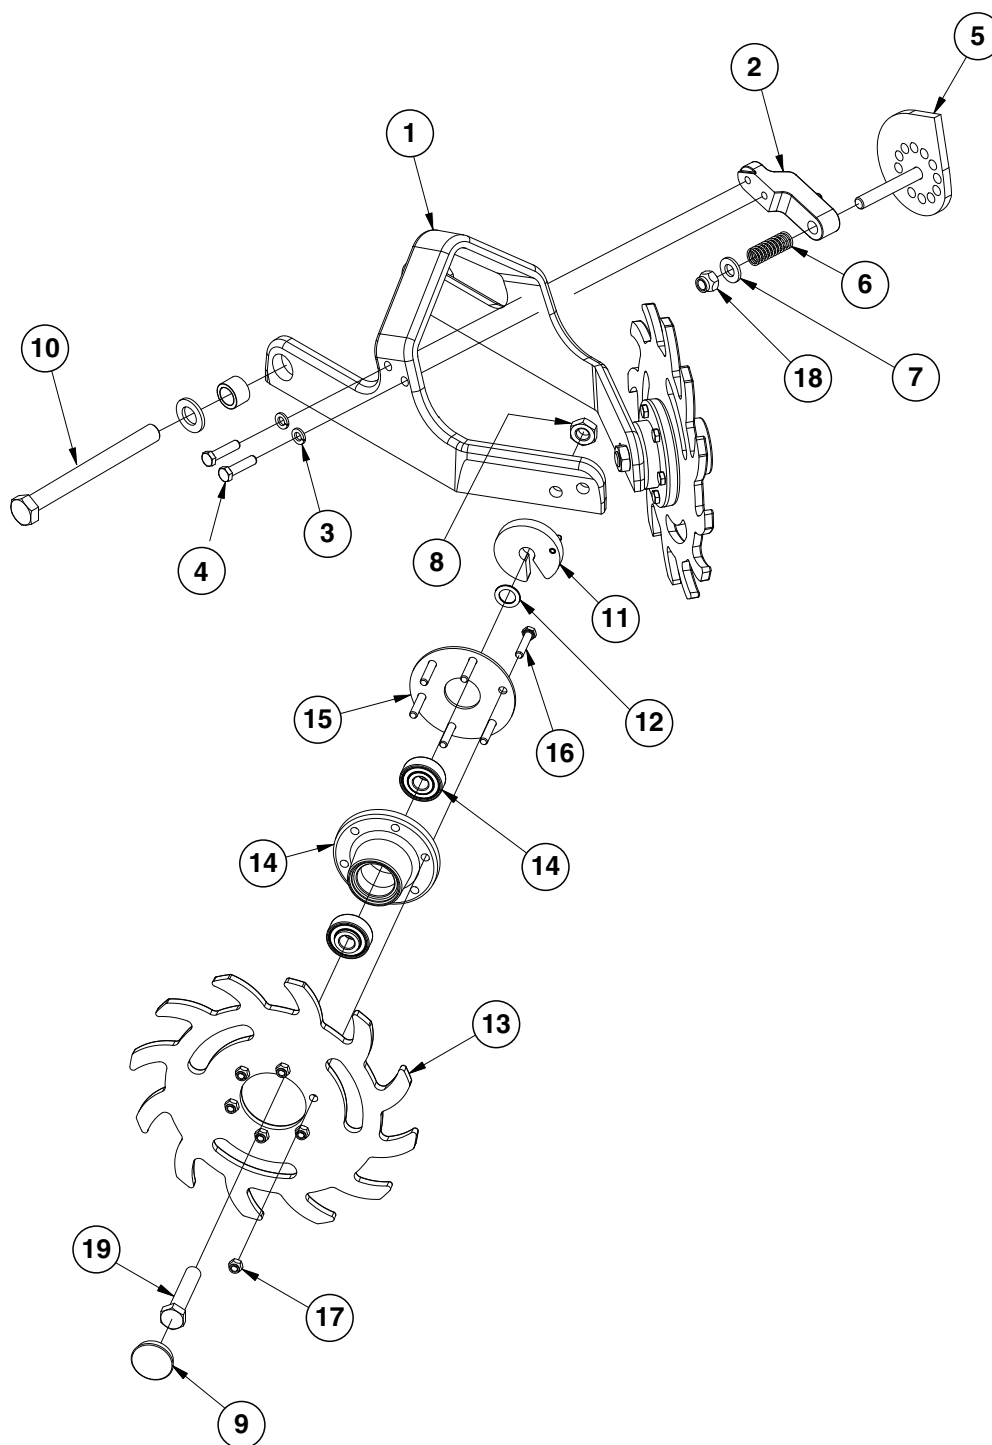


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	GB0464	1	Residue Wheel Mount
2	GD26973	1	Cam Locking Pin
3	G10229	2	Lock Washer, $\frac{3}{8}$ "
4	G10004	2	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x $1\frac{1}{4}$ "
5	GA27038	1	Row Cleaner Cam
6	GD10519	1	Spring
7	G11389	1	Flat Washer, $\frac{1}{2}$ " Plated SAE
8	G10503	2	Hex Jam Nut, $\frac{5}{8}$ "-11, Grade 2
9	GD1132	2	Dust Cap
10	G11236	1	Hex Head Cap Screw, $\frac{3}{4}$ "-10 x $10\frac{1}{2}$ "
	G11392	2	Flat Washer, $\frac{3}{4}$ " SAE
	GB0383	2	Bushing, $1\frac{1}{8}$ " O.D. x $2\frac{5}{32}$ " I.D. x $\frac{3}{4}$ " Long
	G11228	1	Lock Nut, $\frac{3}{4}$ "-10
11	GA8760	2	Weed Guard W/Spring Pin
	G10765	-	Spring Pin, $\frac{1}{4}$ " x 1" (Included W/GA8760)
12	GD30725	4	Machine Bushing, $\frac{5}{8}$ " (.030" Thick)
13	GB0387	2	Wheel, 12 Tine, $\frac{3}{8}$ " x 12"
14	GA5654	2	Hub W/Bearings
	GA2014	-	Bearing (Included W/GA5654)
15	GD9724	2	Backing Plate
16	G10133	12	Hex Head Cap Screw, $\frac{5}{16}$ "-18 x $1\frac{1}{2}$ "
17	G10109	12	Lock Nut, $\frac{5}{16}$ "-18, Grade 8
18	G10974	1	Lock Nut W/Nylon Insert, $\frac{1}{2}$ "-13
19	G10010	2	Hex Head Cap Screw, $\frac{5}{8}$ "-11 x 3"
A	GA12235	-	L.H. Residue Wheel (Items 13-17)
B	GA12236	-	R.H. Residue Wheel (Items 13-17)

This page left blank intentionally.

NOTE: Push row units use the same seed tube, row unit depth adjustment components, quick adjustable down force springs, 15" opener disc blades, gauge wheels, closing wheels, meter drive and seed hopper as the pull row unit. See those pages for common parts.


- [See "Shank Assembly, Seed Tube, and Depth Adjustment" on page P2](#)
- [See "Parallel Arms, Mounting Support Plate, and Quick Adjustable Down Force Springs Option" on page P4](#)
- [See "15" Seed Opener Disc Blade/Bearing Assembly and Scrapers" on page P6](#)
- [See "Gauge Wheels" on page P8](#)
- [See "'V' Closing Wheels" on page P10](#)
- [See "Hopper Support and Meter Drive" on page P12](#)
- [See "Seed Hopper and Lid" on page P15](#)

NOTE: Row unit assembly does not include the following: seed meter assembly, seed tube assembly, row unit hopper assembly, closing wheels, or seed meter clutch.

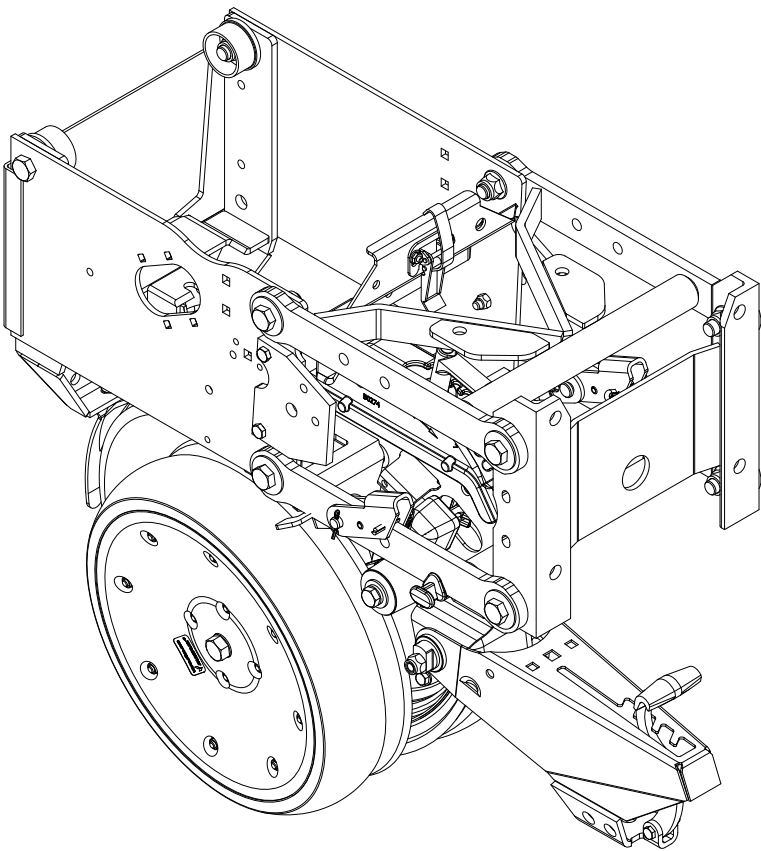


ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	G10504X	1	Push Row Unit Assembly (Standard Gauge Wheels)
2	G10985X	1	Push Row Unit Assembly (Spoked Gauge Wheels)

NOTE: Push row units use the same seed tube, row unit depth adjustment components, quick adjustable down force springs, 15" opener disc blades, gauge wheels, closing wheels, meter drive and seed hopper as the pull row unit. See those pages for common parts.

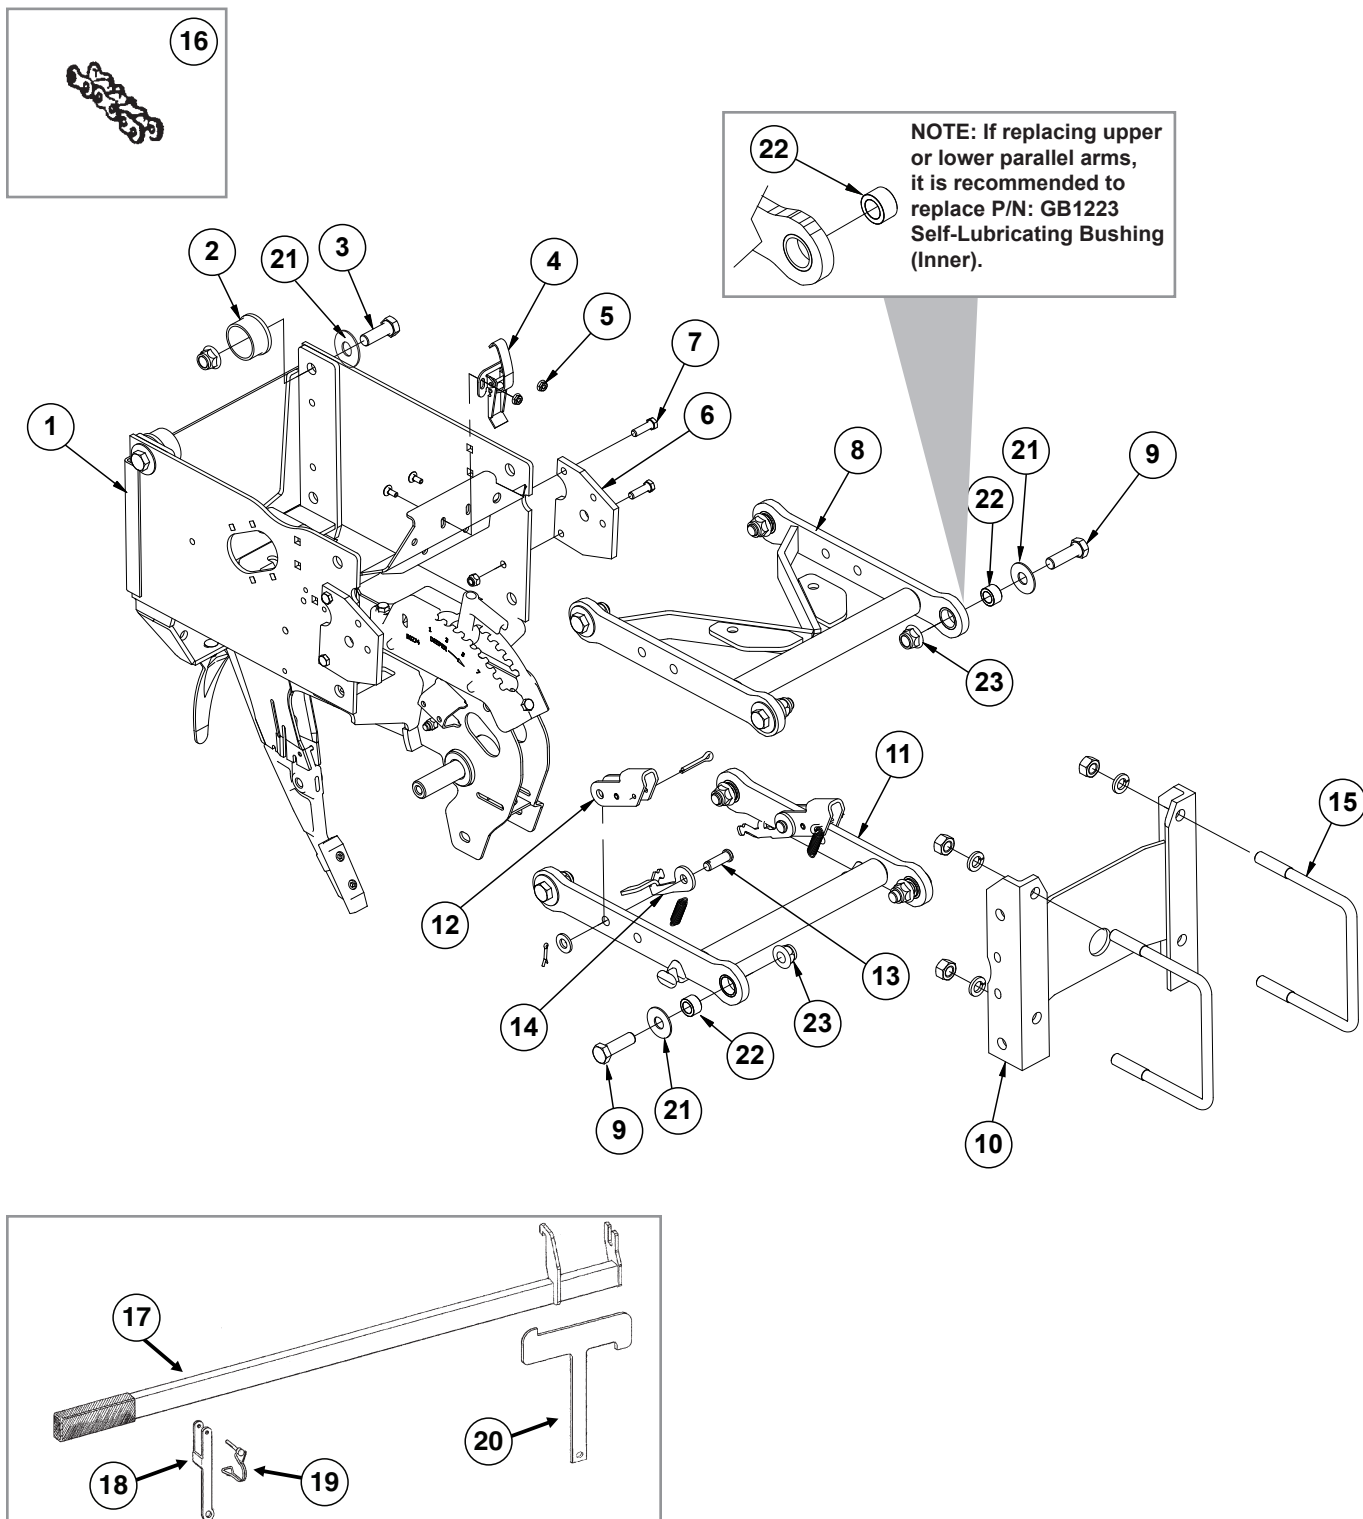

ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	---	1	See "Shank and Depth Adjustment (Split Row)" on page P36
2	GB0314	2	Hopper Mount
3	G10751	2	Hex Head Cap Screw, 5/8"-18 x 1 3/4"
	G11514	2	Lock Nut, 5/8"-18
4	GA2007	1	Hopper Hold Down Latch
5	G10621	2	Serrated Flange Nut, 1/4"-20
	G10309	2	Carriage Bolt, 1/4"-20 x 5/8", Grade 5
6	GD24545	2	Row Unit Stop
7	G10004	4	Hex Head Cap Screw, 3/8"-16 x 1 1/4"
	G10108	4	Lock Nut, 3/8"-16
8	G10011301	1	Upper Parallel Arm Assembly
	GB1224	-	Self-Lubricating Bushing (Included W/G10011301)
9	G10732	4	Hex Head Cap Screw, 5/8"-18 x 2"
10	GA11971	1	Mounting Plate
11	G10011401	1	Lower Parallel Arm Assembly
	GB1224	-	Self-Lubricating Bushing (Included W/G10011301)
12	GD11264	1	Lockup
	G10718	2	Spring Pin, 5/16" x 1 1/8"
	G10463	2	Cotter Pin, 1/4" x 1 1/2"
	GD25569	2	Spring
13	G10284	2	Clevis Pin, 1/2" x 1 1/2"
	G11389	2	Flat Washer, 1/2" Plated SAE
	G10451	2	Cotter Pin, 1/8" x 1"
14	GD25568	1	Spring Mount Tab, L.H.
	GD29459	1	Spring Mount Tab, R.H.
15	GD1113	2	U-Bolt, 5" x 7" x 5/8"-11 (Push Units/Front Rows)
	G10230	4	Lock Washer, 5/8"
	G10104	4	Hex Nut, 5/8"-11
16	G3303-96	1	Chain, No. 41, 96 Pitch Including Connector Link
	GR0196	1	Connector Link, No. 41
17	GA24889	-	Lift Lever W/Boot
	GD11649	-	Boot (Included W/GA24889)
18	GD35471	1	Bracket (Lift Lever)
19	GD9695	1	Wire Lock Pin, 1/4" x 1 3/4"
20	GD35472	1	Mount
21	G11976	10	Flat Washer, 5/8" x 1 3/4"
22	GB1223	8	Self-Lubricating Bushing
23	G11514	8	Lock Nut, 5/8"-18
A	G1K534	-	Push Unit Lock-Up Kit, Items 6, and 12-14 (Includes GD24545 - Push Unit Stop)
B	G1K535	-	Push Unit Spring Lock-Up Kit, Items 12-14
C	G1K759	-	Push Row Unit Parallel Kit, Includes: (1) G10011301, (1) G10011401, (8) GB1223, (8) G11976, (2) G10732, (8) G11514, (6) G10751, (2) IS1066


(IP1585)

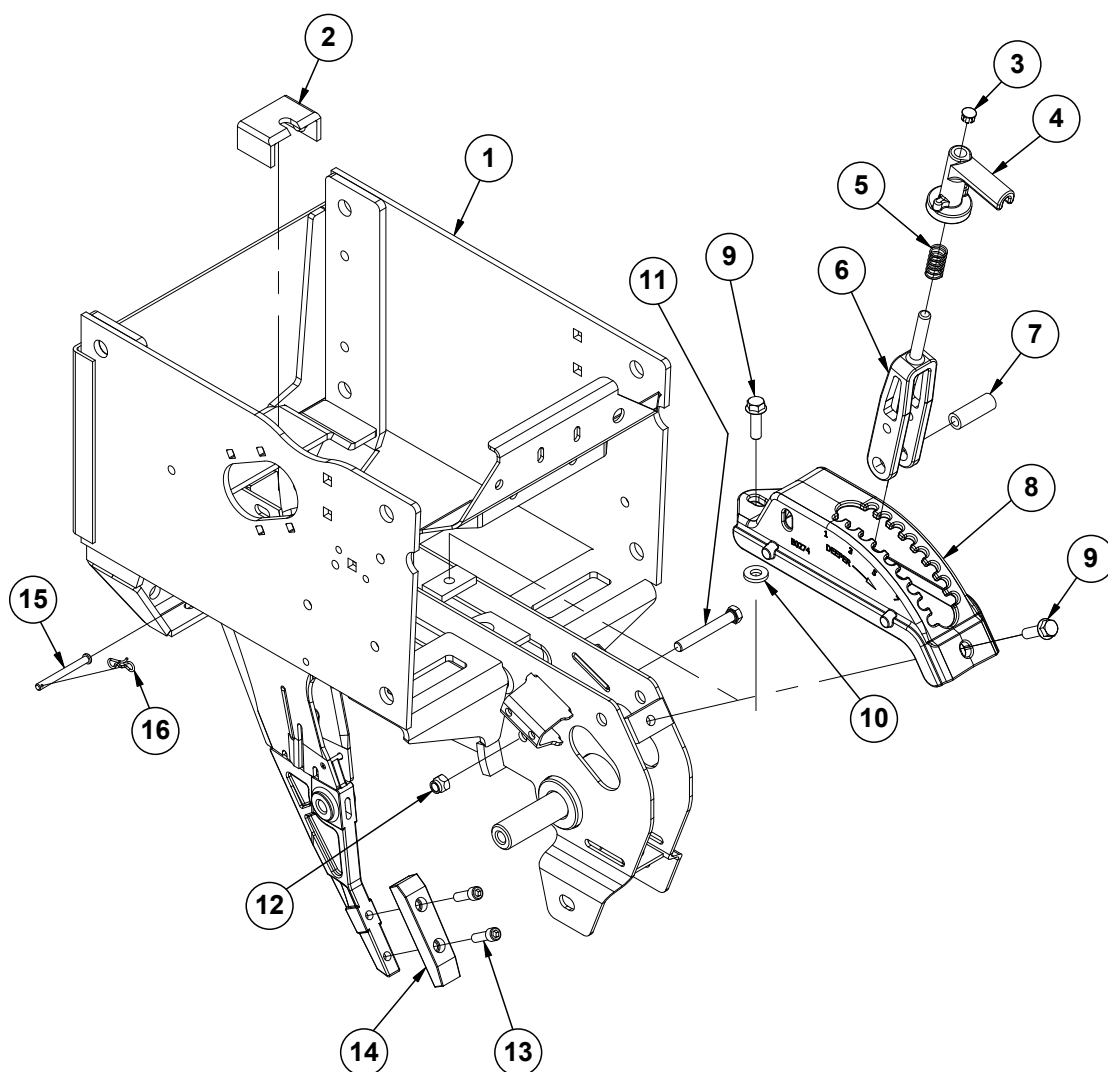

ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	GA26297	1	Push Row Unit Shank
2	GD16245	1	Sun Shade (Rubber)
3	GD3612	1	Cap Plug
4	GB0266	1	Handle, Depth Adjustment
5	GD10993	1	Spring
6	GB0267	1	Lever, Depth Adjustment
7	GD11259	1	Sleeve, $\frac{3}{8}$ " I.D. x $\frac{5}{8}$ " O.D. x $1\frac{25}{32}$ " Long
8	GB0274	1	Cover, Depth Adjustment
9	G11015	2	Hex Washer Head Cap Screw, $\frac{3}{8}$ "-16 x $1\frac{1}{4}$ "
10	G10207	1	Washer, $\frac{7}{8}$ " O.D. x $1\frac{13}{32}$ " I.D. x .134"
11	G11592	1	Hex Head Cap Screw, $\frac{3}{8}$ "-24 x $2\frac{3}{4}$ ", Grade 8
12	G11591	1	Nylon Lock Nut, $\frac{3}{8}$ "-24, Grade C
13	G10500901	2	Hex Socket Head Cap Screw, $\frac{5}{16}$ "-18 x 1"
14	G10038601	1	Scraper
15	G10551	1	Clevis Pin, $\frac{1}{4}$ " x $2\frac{1}{2}$ "
16	G10122301	1	Bow Tie Cotter Pin


ITEM	PART NO.	QTY.	DESCRIPTION
1	GA8717	1	Front Mount
2	G10233	5	Machine Bushing, 1", 10 Gauge
3	G10130	2	Square Head Machine Bolt, $\frac{5}{16}$ "-18 x $1\frac{3}{4}$ "
	G10923	2	Flange Nut, $\frac{5}{16}$ "-18, No Serration
4	GD11045	2	Lock Clamp
5	GD0914-84	1	Hex Shaft, $\frac{7}{8}$ " x 84" (No Holes), 4 Row 30"
	GD0914-144	-	Hex Shaft, $\frac{7}{8}$ " x 144" (No Holes), 6 Row 30"
	GD0914-205	-	Hex Shaft, $\frac{7}{8}$ " x 205" (No Holes), 8 Row 30"
6	GA2180	2	Hanger Bearing, $\frac{7}{8}$ " Hex Bore
7	GA5107	1	Sprocket, 19 Tooth
8	GD11721	1	U-Bolt, 5" x 7" x $\frac{1}{2}$ "-13 (Double Frame Planters)
	G10228	2	Lock Washer, $\frac{1}{2}$ "
	G10102	2	Hex Nut, $\frac{1}{2}$ "-13
9	GD7145	1	U-Bolt, 7" x 7" x $\frac{1}{2}$ "-13 (Double Frame Planters)
	G10228	2	Lock Washer, $\frac{1}{2}$ "
	G10102	2	Hex Nut, $\frac{1}{2}$ "-13
10	G3310-138	1	Chain, No. 40, 138 Pitch Including Connector Link (Single Frame Planters)
	G3310-252	-	Chain, No. 40, 252 Pitch Including Connector Link (Double Frame Planters)
	GR0912	-	Connector Link, No. 40
11	GA8716	1	Rear Mount
12	GD9229	4	Spacer, $1\frac{1}{4}$ " O.D. x $\frac{1}{2}$ " Long
13	GA7154	4	Sprocket W/Bearing, 18 Tooth
14	G10581	4	Hex Head Cap Screw, $\frac{1}{2}$ "-13 x $2\frac{1}{4}$ "
	G10168	4	Machine Bushing, $\frac{1}{2}$ ", 7 Gauge
	G10228	4	Lock Washer, $\frac{1}{2}$ "
	G10102	4	Hex Nut, $\frac{1}{2}$ "-13
15	G10001	-	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x 1"
	G10229	-	Lock Washer, $\frac{3}{8}$ "
	G10101	-	Hex Nut, $\frac{3}{8}$ "-16
16	---	-	
17	G10909	2	Hex Head Cap Screw, $\frac{1}{2}$ "-13 x 9" (Single Frame Planters)
	G10228	2	Lock Washer, $\frac{1}{2}$ "
	G10102	2	Hex Nut, $\frac{1}{2}$ "-13
18	G10968	1	Spring Pin, $\frac{5}{32}$ " x $\frac{7}{16}$ "
19	GR1406	1	Bushing
20	GR1405	1	Lock Collar
21	GR1413	2	Spring
22	GR1410	2	Pin
23	GR1408	1	Compression Spring
24	GR1411	1	Shim
25	G10496	2	External Inverted Snap Ring, $1\frac{1}{2}$ "
26	GR1412	1	Sprocket, 19 Tooth
27	G10535	1	Hex Socket Set Screw, $\frac{3}{8}$ "-16 x $\frac{3}{4}$ "
28	GR1409	1	Knurled Collar
29	GR1407	1	Drive Shaft
A	GA8092	-	Clutch Sprocket Assembly, 19 Tooth (Items 18-29)
B	G1K269	-	Lock Clamp Kit (Items 3 and 4)
C	G1K331	-	Clutch Sprocket Kit (Items 18, 19 and 26)

(PT73d)

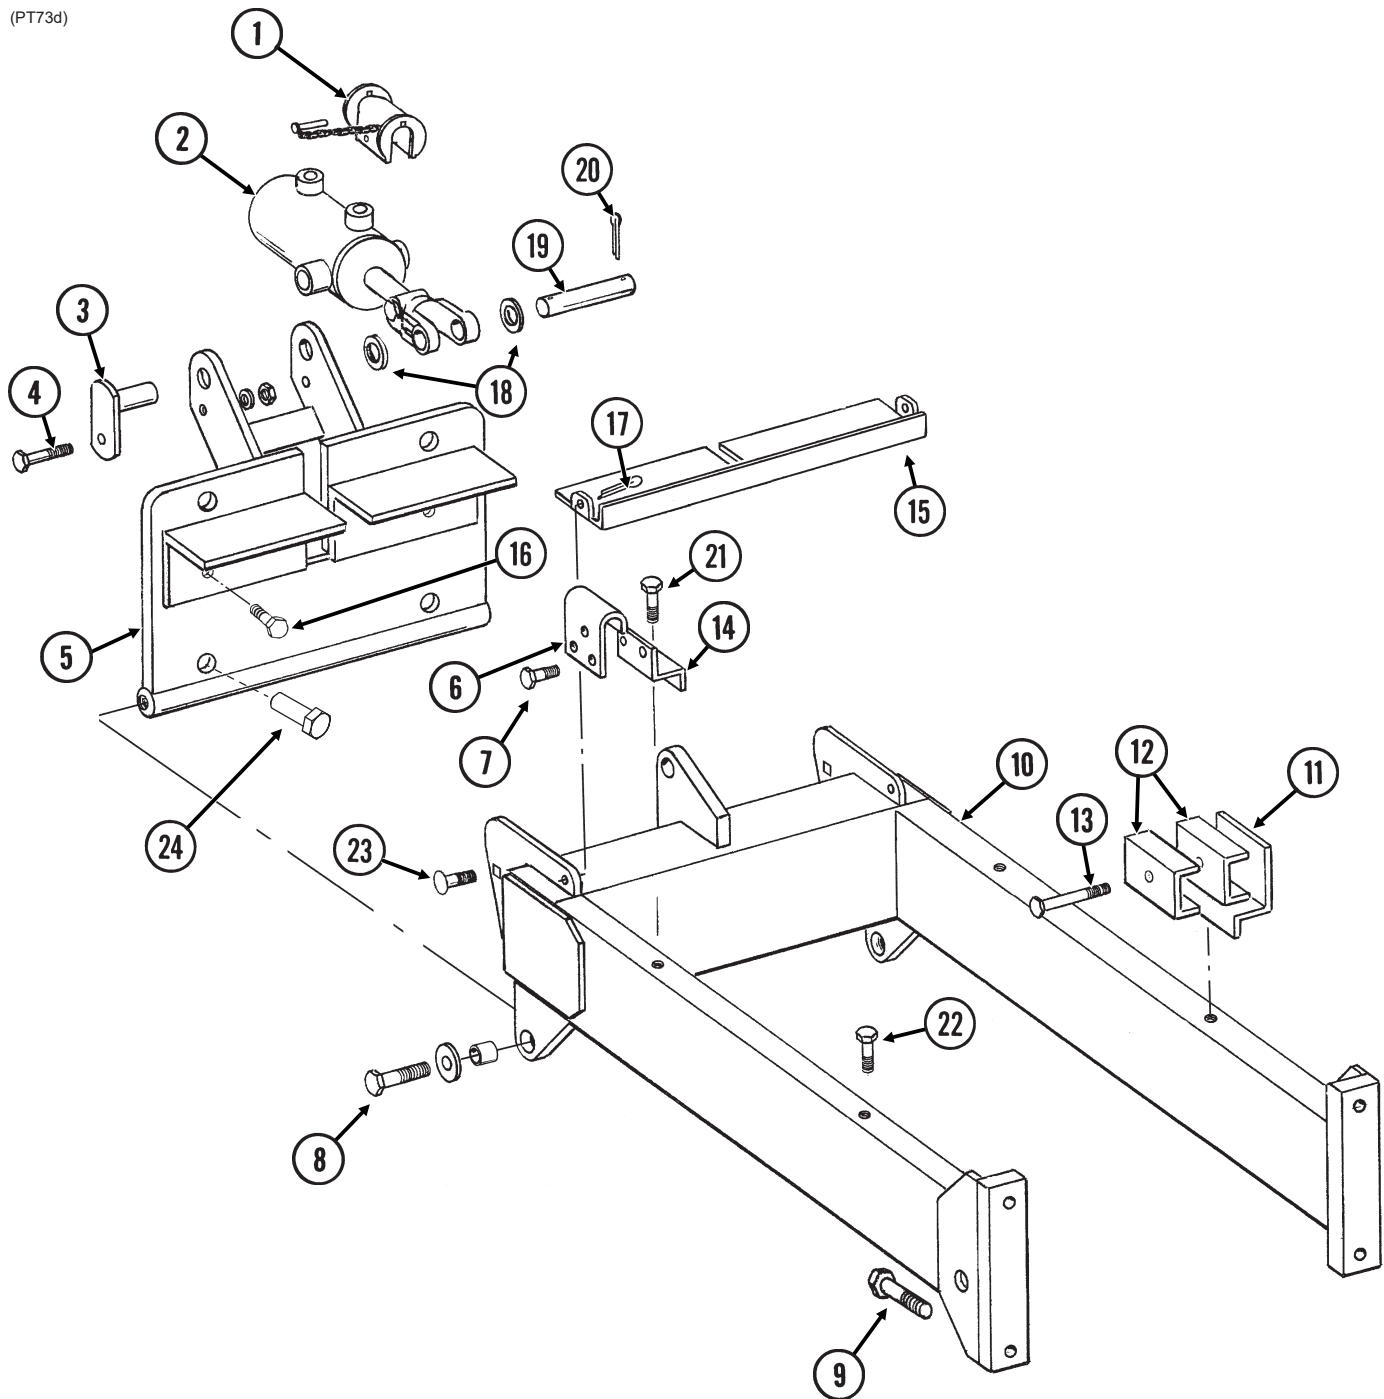

ITEM	PART NO.	QTY.	DESCRIPTION
1	GA9872	1	Lockup W/Pin
2	---	-	See "Split Row Lift Cylinder" on page P127
3	GA6761	2	Pin
4	G10581	2	Hex Head Cap Screw, 1/2"-13 x 2 1/4"
	G11389	2	Flat Washer, 1/2" SAE
	G10111	2	Lock Nut, 1/2"-13
5	GA8487	1	Hinge
6	GD7944	1	Mount
7	G10001	2	Hex Head Cap Screw, 3/8"-16 x 1"
	G10229	2	Lock Washer, 3/8"
	G10101	2	Hex Nut, 3/8"-16
8	G10645	2	Hex Head Cap Screw, 1"-8 x 3", Grade 8
	G11394	2	Flat Washer, 1" SAE
	GD11535	2	Bushing, 1 1/2" O.D.
9	---	-	See "Hitch and Frame Assembly/Safety Chain" on page P60
10	GA8488	1	Hitch Extension W/Grease Fittings, 4 Row 30", 6 Row 30" and 8 Row 30"
	G10640	-	Grease Fitting, 1/4"-28 (Included W/GA8488)
11	GD11657	2	Mount
12	GD6027	4	Hose Clamp, 3/4" x 2 1/2" x 2 1/2"
13	G10325	2	Hex Head Cap Screw, 3/8"-16 x 2 3/4"
	G10108	2	Lock Nut, 3/8"-16
14	GD11662	1	Mounting Bracket
15	GA8676	1	Shield
16	G10428	2	Hex Head Cap Screw, 5/8"-11 x 3/4"
17	G10451	2	Cotter Pin, 1/8" x 1"
18	G11396	2	Flat Washer, 1 1/4" SAE
19	GD11559	1	Pin, 1 1/4" x 4 7/8"
20	G10460	2	Cotter Pin, 1/4" x 2"
21	G10001	3	Hex Head Cap Screw, 3/8"-16 x 1"
	G10229	3	Lock Washer, 3/8"
	G11387	3	Flat Washer, 3/8" SAE
22	G10001	1	Hex Head Cap Screw, 3/8"-16 x 1"
23	G10574	2	Carriage Bolt, 1/2"-13 x 1 1/4"
	G11389	2	Flat Washer, 1/2" SAE
	G10111	2	Lock Nut, 1/2"-13
24	G10822	4	Hex Head Cap Screw, 1"-8 x 4", Grade 8
	G10396	4	Lock Nut, 1"-8, Grade 8


(IP1586)

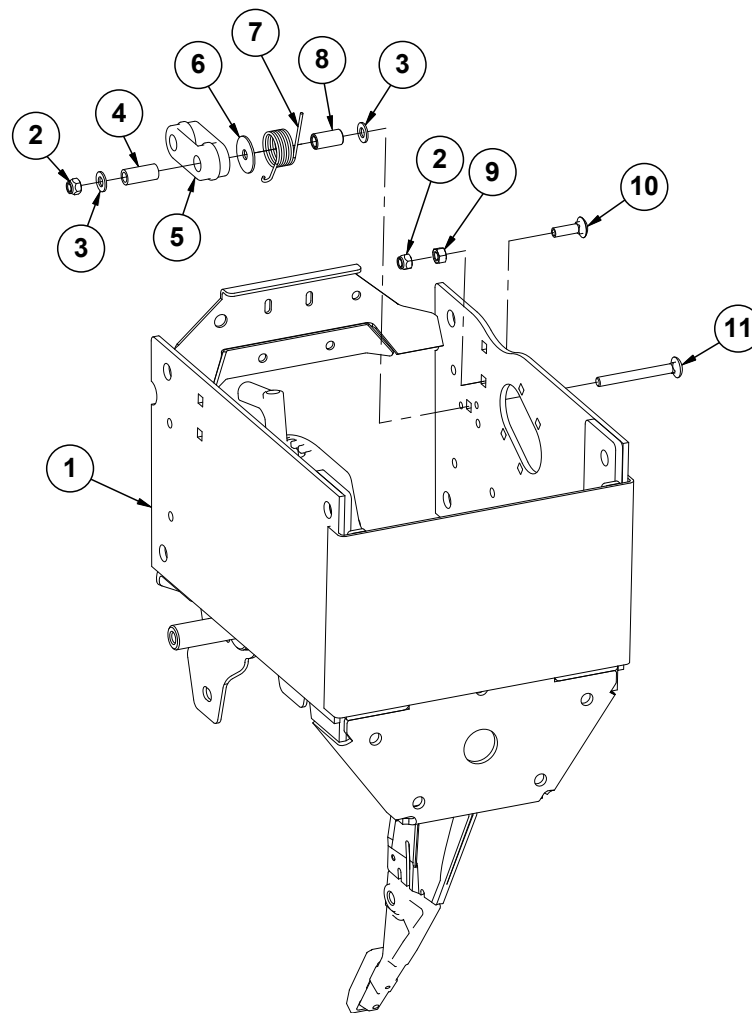

ITEM	PART NO.	QTY. (Per Row)	DESCRIPTION
1	---	1	See "Shank and Depth Adjustment (Split Row)" on page P36
2	G10108	2	Lock Nut, $\frac{3}{8}$ "-16
3	G11387	2	Flat Washer, $\frac{3}{8}$ " SAE
4	GD8893-01	1	Sleeve, $1\frac{3}{8}$ " Long
5	GB0968	1	Idler
6	G10201	1	Special Washer, $\frac{3}{8}$ " x $1\frac{1}{2}$ " O.D.
7	GD11218	1	Spring
8	GD1026	1	Sleeve, $1\frac{3}{8}$ " Long
9	G10101	1	Hex Nut, $\frac{3}{8}$ "-16
10	G10599	1	Carriage Bolt, $\frac{3}{8}$ "-16 x $1\frac{1}{4}$ "
11	G10307	1	Carriage Bolt, $\frac{3}{8}$ "-16 x $3\frac{1}{2}$ "


This page left blank intentionally.

(IP1521)

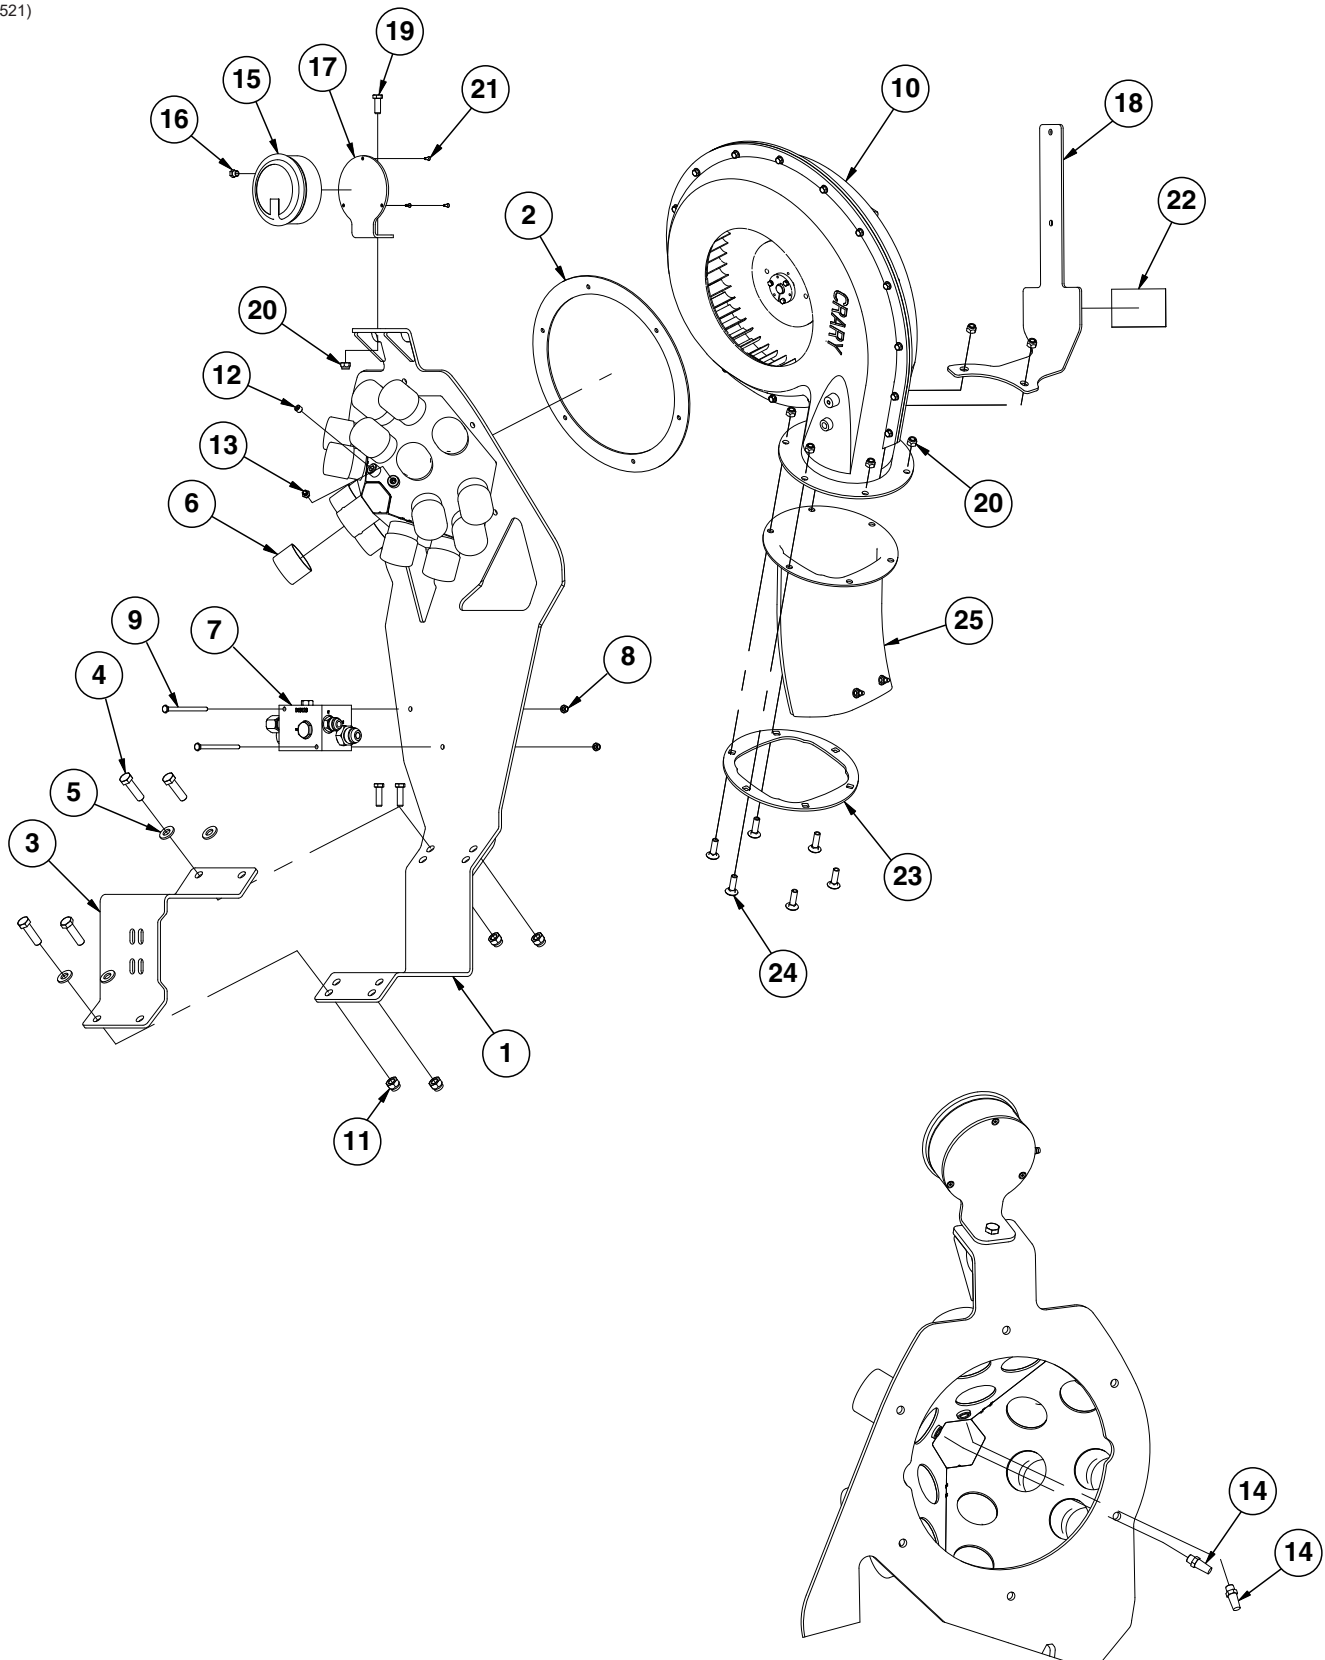


ITEM	PART NO.	QTY.	DESCRIPTION
1	GA15818	1	Vacuum Manifold
2	GD26697	1	Fan Gasket
3	GD27408	1	Clamp Mount
4	G10039	4	Hex Head Cap Screw, ½"-13 x 1¾"
5	G11389	4	Flat Washer, ½" Plated SAE
6	G11147	15	Cap, 2"
7	---	-	See "Vacuum Fan Override Valve Block" on page P133
8	G10110	2	Lock Nut, ¼"-20, Grade B
9	G11135	2	Hex Head Cap Screw, ¼"-20 X 3¾"
10	---	-	See "Vacuum Fan With Hydraulic Motor" on page P46
11	G10974	4	Lock Nut W/Nylon Insert, ½"-13
12	GR1777	1	Hose Barb, ⅜" x ⅛" NPT
13	GD19079	1	Plug, ⅛" NPT
14	GA19018	2	Air Filter, ⅛" NPT
15	GA10765	1	Analog Vacuum Gauge W/Hose Barb
	GR1777	-	Hose Barb, ⅜" x ⅛" NPT
16	GA10799	1	Breather, ⅛" Male NPT
17	GD15804	1	Mount
18	GD27401	1	SMV Mount
19	G10001	1	Hex Head Cap Screw, ⅜"-16 x 1"
20	G10108	7	Lock Nut, ⅜"-16
21	G11215	3	Hex Socket Head Cap Screw, No. 6-32 x ⅜", Grade 8
22	G7100-392	1	Decal, Caution
23	GD27181	1	Fan Diffuser Gasket
24	G10599	6	Carriage Bolt, ⅜"-16 x 1¼"
25	GD27402	1	Exhaust Fan Diffuser
	GA15812	1	Screen
	G11329	2	Hex Head Cap Screw, ¼"-20 x 6½"
	G11385	4	Flat Washer, ¼" SAE
	G11320	2	Lock Nut, ¼"-20, Grade B

(A15811)

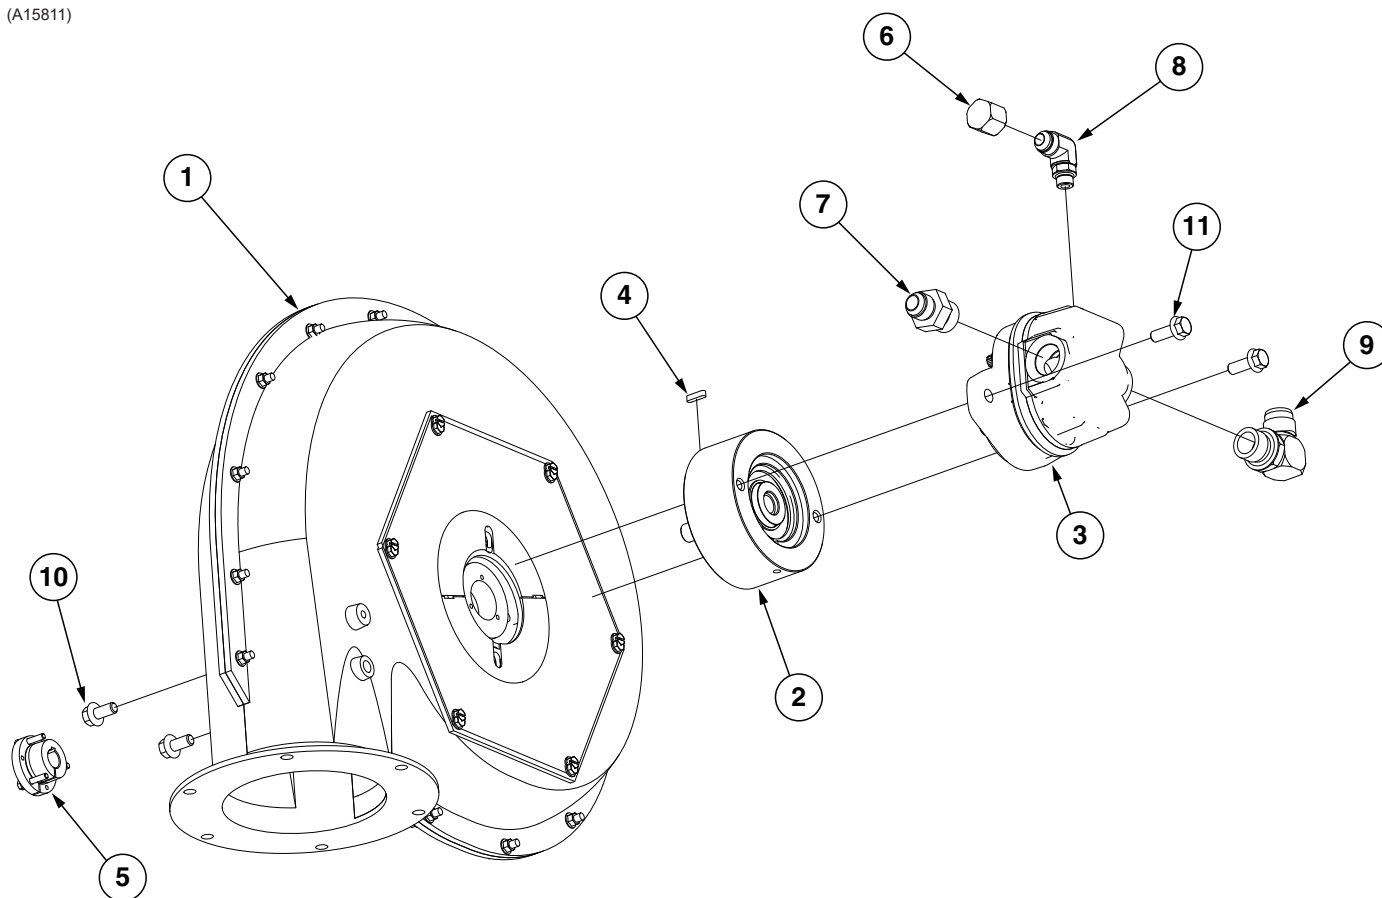



ITEM	PART NO.	QTY.	DESCRIPTION
1	GA14573	1	See "Vacuum Fan Assembly" on page P47
2	GA15452	1	Overhung Load Adapter
3	GA14574	1	Hydraulic Motor
4	GD21300	1	Key
5	GR1961	1	Bushing, 5/8"
6	G304-C-8	1	Cap Nut, 3/4"-16
7	G6400-10-12 GR1467	1 -	Connector W/O-Ring, 7/8"-14 Male JIC To 1 1/16"-12 O-Ring O-Ring
8	G6801-08-06 GR1045	1 -	Elbow W/O-Ring, 90°, 3/4"-16 Male JIC To 9/16"-18 O-Ring O-Ring
9	G6801-12 GR1467	1 -	Elbow W/O-Ring, 90°, 1 1/16"-12 Male JIC To O-Ring O-Ring
10	G11123	2	Hex Serrated Flange Cap Screw, 3/8"-16 x 3/4"
11	G11124	2	Hex Serrated Flange Cap Screw, 3/8"-16 x 1"
A	GR1960	-	Fan Motor Seal Kit

(A14573)

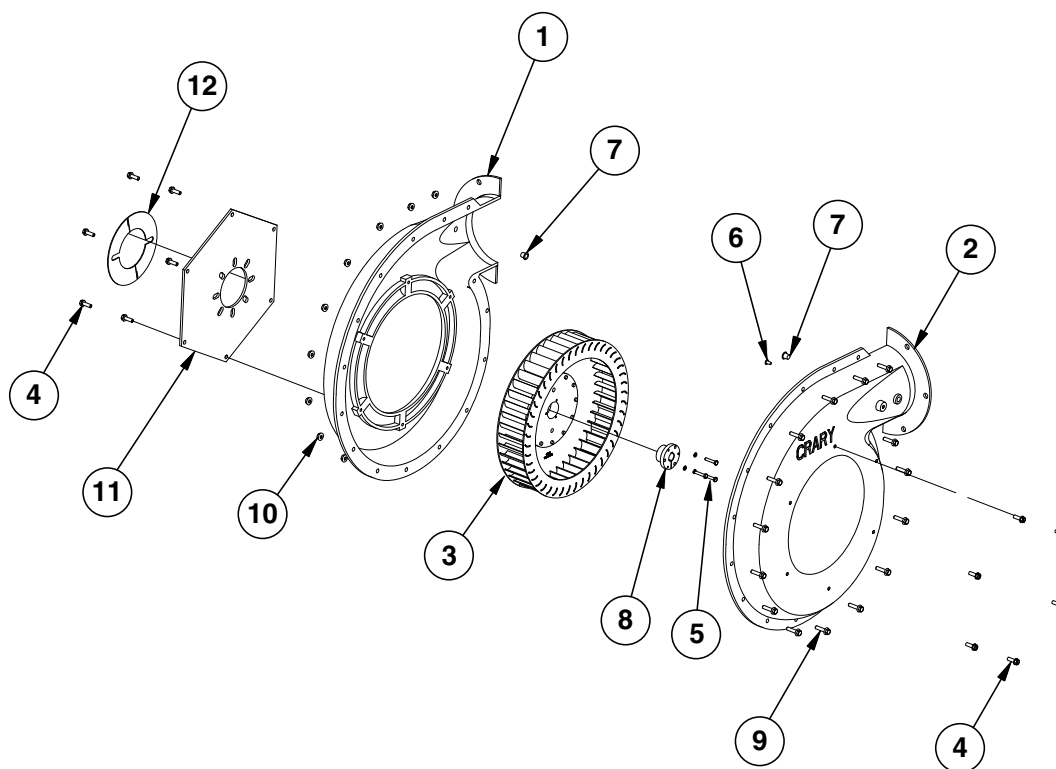


ITEM	PART NO.	QTY.	DESCRIPTION
1	GR1971	1	Flanged Inner Case
2	GR1970	1	Flanged Outer Case
3	GR2109	1	Impeller
4	G10988	12	Hex Non-Serrated Flange Cap Screw, 1/4"-20 x 3/4"
5	G11518	3	Hex Head Machine Screw, #10-24 x 1"
	G10243	3	Washer, No. 10 SAE
6	GR1978	1	Plastic Plug, 1/4"
7	GR1979	2	Plastic Plug, 7/16"
8	GR1961	1	Bushing, 5/8"
9	G11409	15	Hex Serrated Flanged Cap Screw, 1/4"-20 x 1"
10	G10621	15	Serrated Flange Nut, 1/4"-20
11	GR1969	2	Backing Plate
12	GR1968	2	Cover Plate
A	GR1960	-	Fan Motor Seal Kit
B	GA14573	-	Fan Assembly (Flanged) (Items 1-7 and 9-12)

(TP1321a)


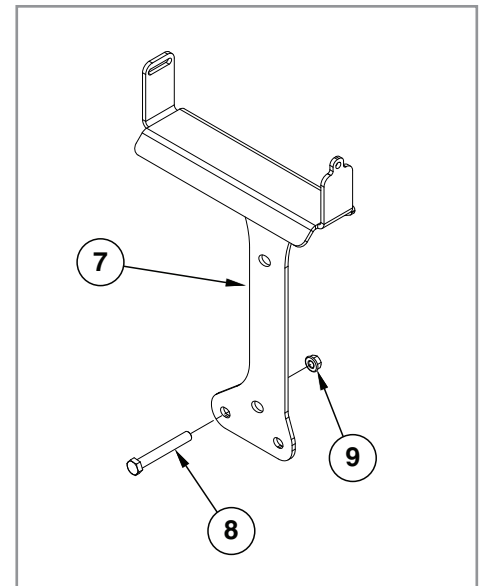
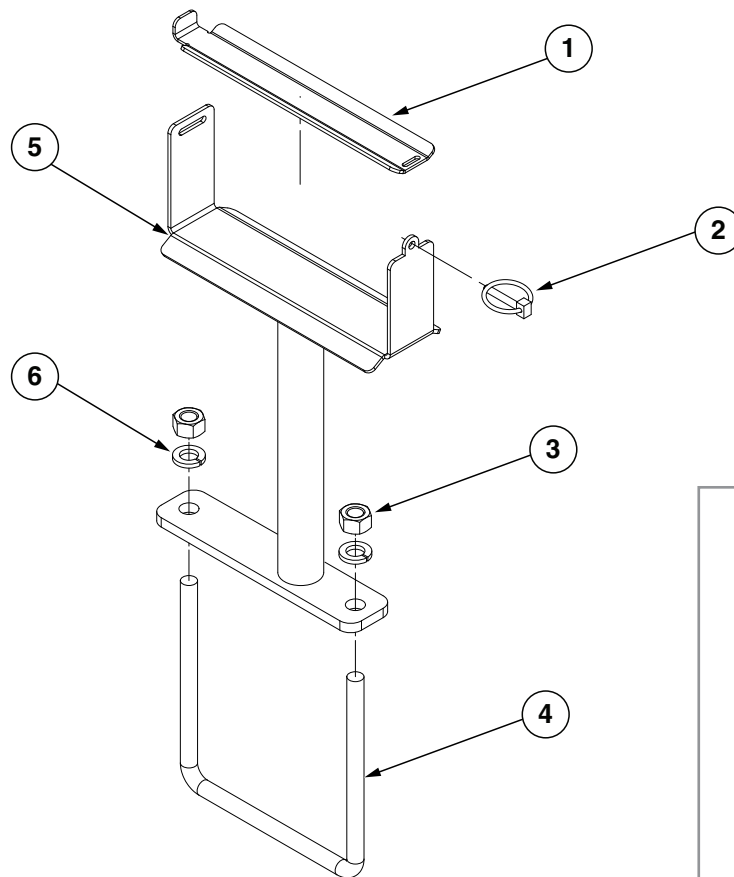


ITEM	PART NO.	QTY.	DESCRIPTION
1	GD26538	1	Hose Support Bracket
2	GD2558	1	Lynch Pin, 1/4"
3	G10104	2	Hex Nut, 5/8"-11
4	GD1114	1	U-Bolt, 7" x 7" x 5/8"-11
5	GA15814	1	Hose Support
6	G10230	2	Lock Washer, 5/8"
7	GD35890	1	Hose Support Bracket (Wheel Module)
8	G10004	2	Hex Head Cap Screw, 3/8"-16 x 1 1/4"
9	G10622	2	Serrated Flange Nut, 3/8"-16

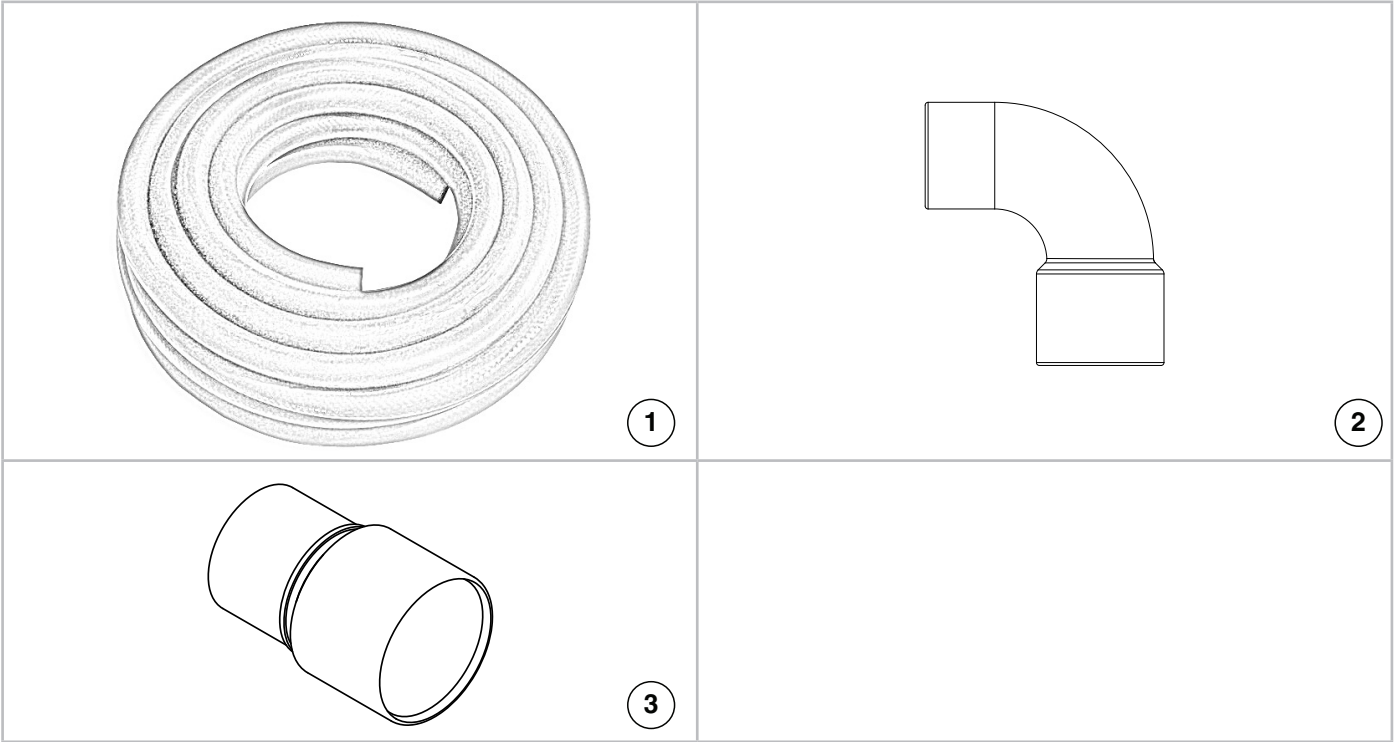


ITEM	PART NO.	QTY.	DESCRIPTION
1	GD15792-18	-	Vacuum Hose, 2" x 50'
2	GD14626	-	90° Elbow, 2"
3	GD14627	-	Coupler, 2"

(A21296)

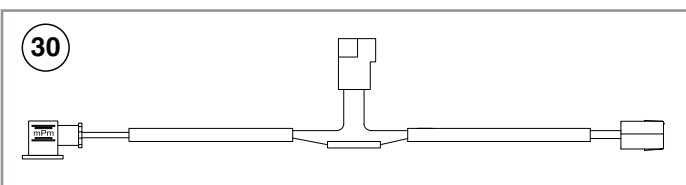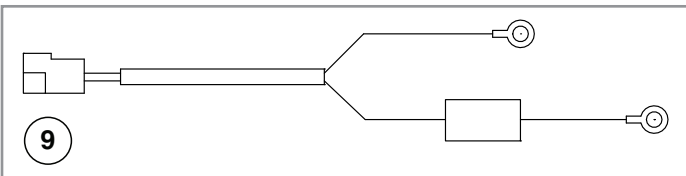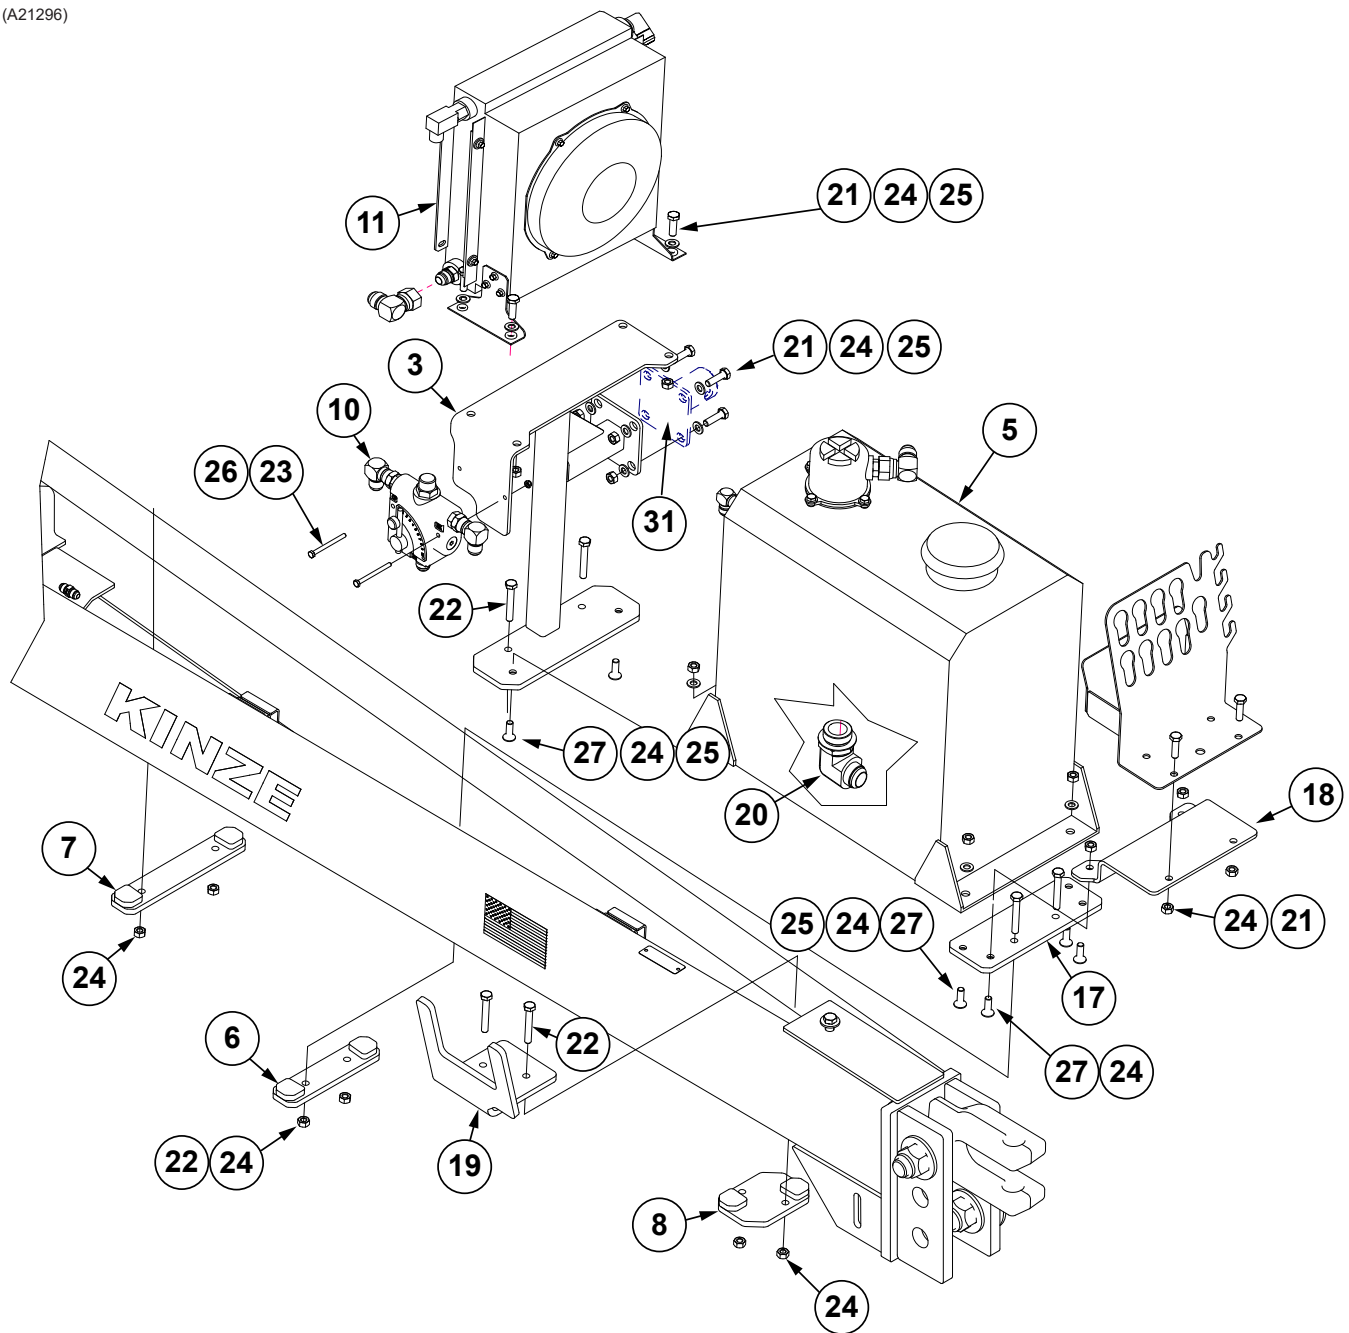


ITEM	PART NO.	QTY.	DESCRIPTION
1	*A22783-1575	1	Hose Assembly, 5/8" x 1575 mm (12F-12F)
2	*A22774-3250	1	Hose Assembly, 1/2" x 3250 mm (10F - 10F))
3	GA21297	1	Cooler Support
4	*A22783-600	1	Hose Assembly, 5/8" x 600 mm (12F-12F)
5	---	1	See "Hydraulic Tank" on page P52
6	GA22225	1	Front PTO Mount
7	GA22226	1	Rear PTO Mount
8	GA22227	1	PTO Storage Mount
9	G10979301	1	PTO Cooler Harness
10	GA22305	1	See "Bypass Valve Kit" on page P132
11	---	1	See "Cooler Fan Assembly" on page P53
12	---	-	---
13	---	-	See "MTZ PTO Pump" on page P54 See "PTO Pump" on page P55
14	*A22766-2550	1	Hose Assembly, 3/8" x 2550 mm (08F - 08F)
15	*A22774-1480	1	Hose Assembly, 1/2" x 1480 mm (10F - 10F)
16	*A22774-600	1	Hose Assembly, 1/2" x 600 mm (10F - 10F)
17	GD30920	1	Mounting Plate
18	GD33279	1	Hose Holder Support
19	GD31442	1	PTO Pump Storage Plate
20	G3801-16-20	1	90° Elbow, 1 5/16"-12 JIC to 1-1/4"-12 BSP O-Ring
21	G12000-35	10	Hex Head Cap Screw, M10-1,5 x 35
22	G12000-65	6	Hex Head Cap Screw, M10-1,5 x 65
23	G12004-70	2	Hex Head Cap Screw, M6-1.0 x 70
24	G12032	22	Hex Nut, M10-1,5
25	G12038	16	Flat Washer, M10
26	G12101	2	Hex Lock Nut, M6-1.00
27	G12183-30	6	Hex Flat Head Cap Screw, M10-1.5 x 30, CL 8.8
28	G6500-10	1	Swivel Elbow, 90°, 7/8"-14 Male JIC To Female
29	G6500-12	2	Swivel Elbow, 90°, 1 1/16"-12 Male JIC To Female
30	GA23992	1	PTO Cooler Harness
31	GA5187	1	Jack Mount

(A22223)

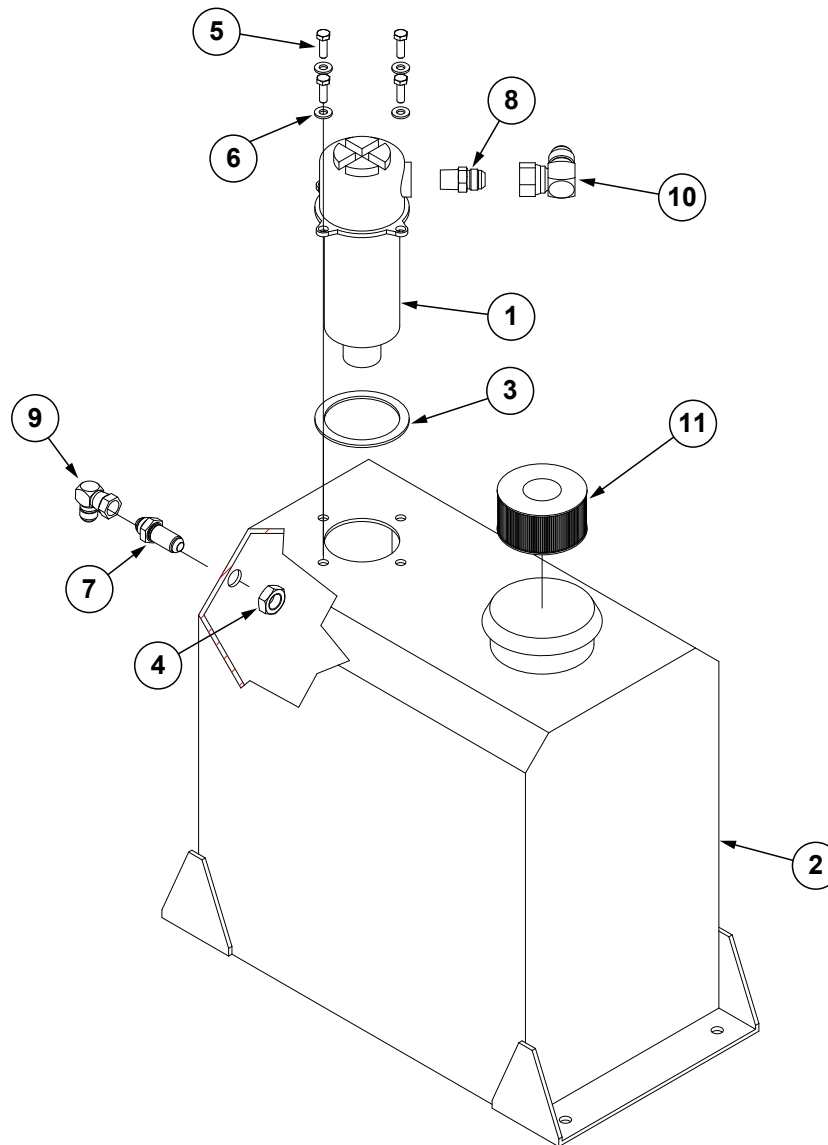


ITEM	PART NO.	QTY.	DESCRIPTION
1	GA21197	1	Return Line Filter
2	GA21295	1	Tank, 60 l
3	GD31439	1	Filter Gasket
4	G10176	1	Hex Jam Nut, 3/4"-16 Grade 2
5	G12003-25	4	Hex Head Cap Screw, M8-1,25 x 25
6	G12081	4	Flat Washer, M8
7	G2700-08	1	Bulkhead Tube Union, 3/4"-16 Male JIC
8	G3800-12-12	1	Adapter, 3/4"-14 BSP x 1 1/16"-12 JIC
9	G6500-08	1	Swivel Elbow, 90°, 3/4"-16 Male JIC To Female
10	G6500-12	1	Swivel Elbow, 90°, 1 1/16"-12 Male JIC To Female
11	GA25474	1	Filter

(A22306)

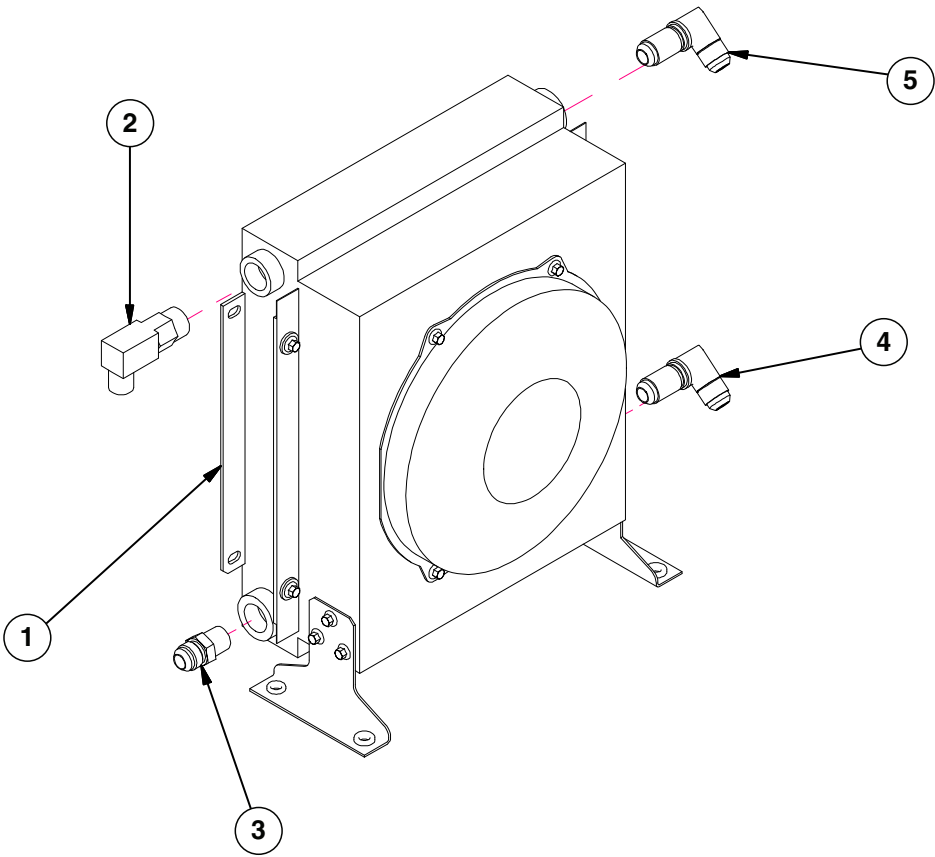


ITEM	PART NO.	QTY.	DESCRIPTION
1	G10253701	1	Oil Cooler Assembly
2	GA22221	1	Thermostat
3	G3800-12-12	1	Male Adapter, 3/4"-14 BSP x 1 1/16"-12 JIC
4	G3801-10-08	1	90° Elbow, 1/2"-12 BSP to 7/8"-14 JIC
5	G3801-12-12	1	90° Elbow, 3/4"-14 BSP to 1 1/16"-12 JIC

(A22308)

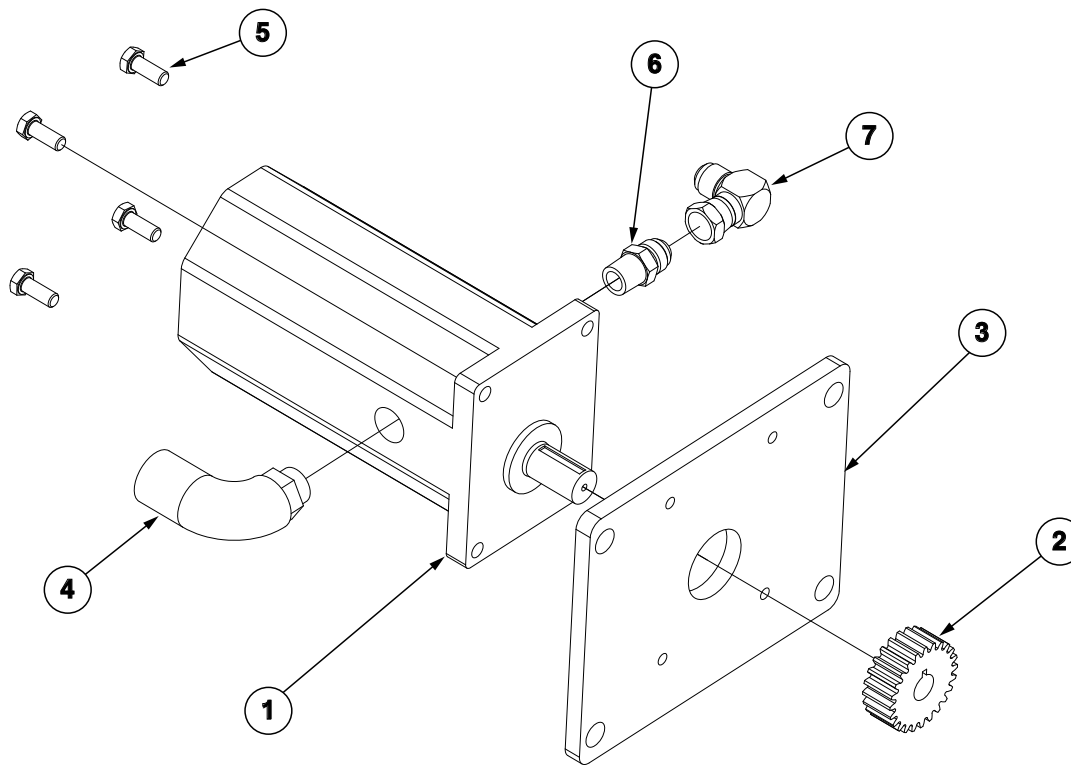


ITEM	PART NO.	QTY.	DESCRIPTION
1	GA21190	1	PTO Gear Pump, 56 CM3/REV
2	GD31435	1	PTO Gear Adapter
3	GD31436	1	PTO Mount Plate
4	GD31438	1	90° Elbow, 1" BSP x 1½"
5	G12000-25	4	Hex Head Cap Screw, M10-1,5 x 25
6	G3800-10-12	1	Adapter, 3/4-14 BSP x 7/8-14 JIC
7	G6500-10	1	Swivel Elbow, 90°, 7/8"-14 Male JIC To Female

(19010-021-01000)

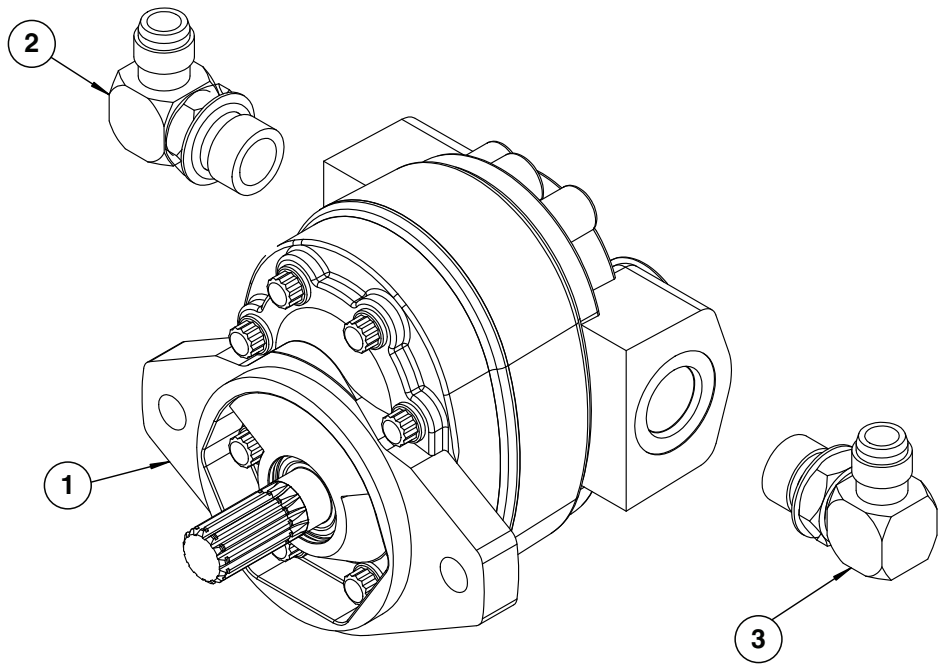


ITEM	PART NO.	QTY.	DESCRIPTION
1	GA14446	1	PTO Pump
2	G6801-10-12	1	Elbow W/O-Ring, 90°, 7/8"-14 Male JIC To 1 1/16"-12 O-Ring
3	G6801-16-20	1	Elbow W/O-Ring, 90°, 1-5/16"-12 Male JIC To 1-5/8"-12 O-Ring

(10987501)

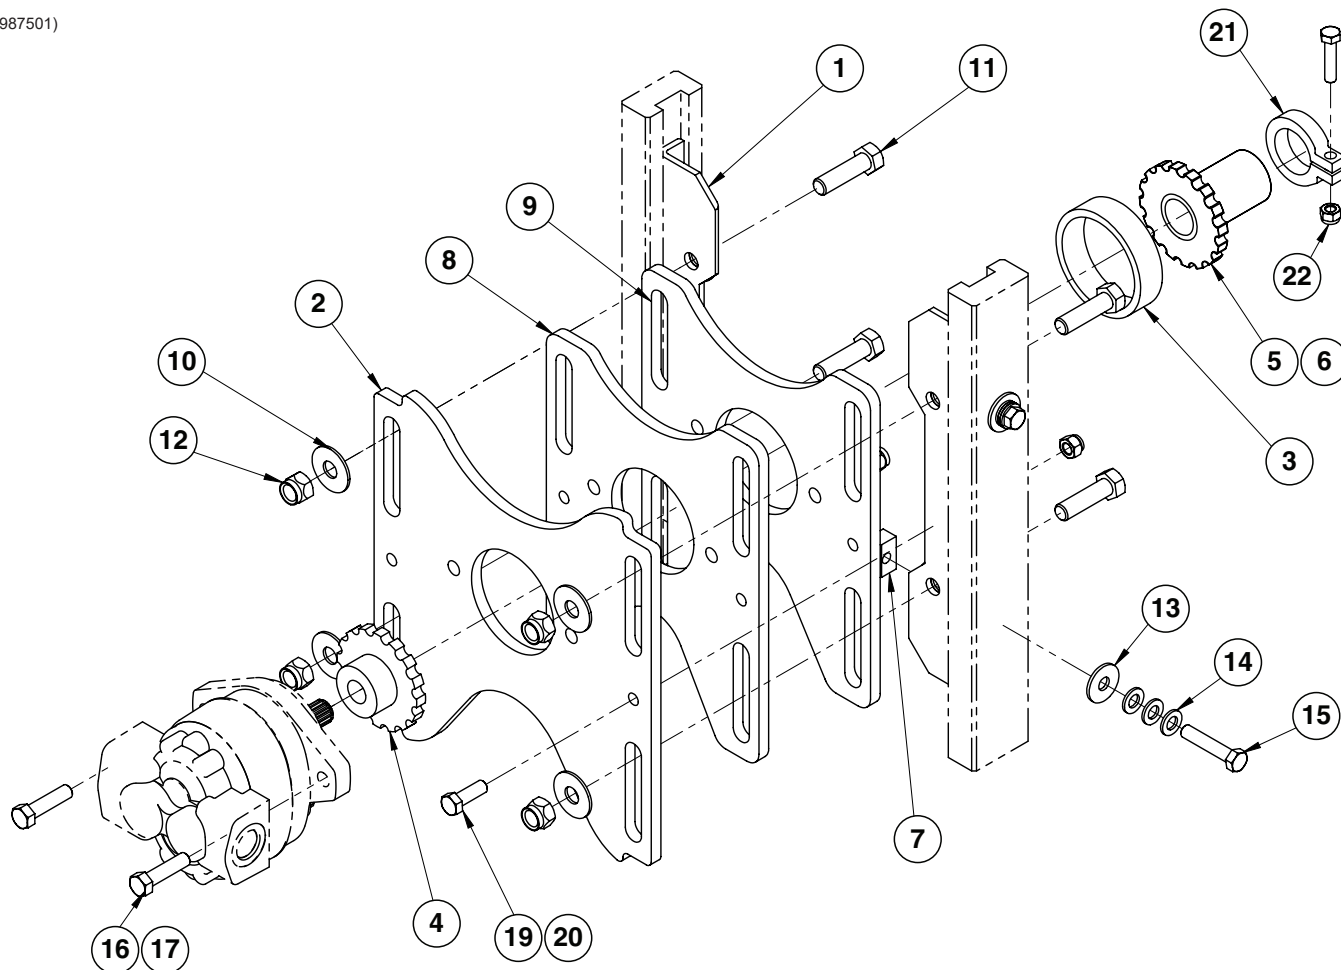


ITEM	PART NO.	QTY.	DESCRIPTION
1	G10985501	2	Rail Mount
2	G10985301	1	Pump Mount Plate, 39 cm
3	G10984801	1	Chain with Link
4	G10984701	1	Sprocket, 16 Tooth
5	G10985001	1	Long Sprocket, 16 Tooth, 1-3/4" x 20 Spline
6	G10984901	1	Long Sprocket, 16 Tooth, 1-3/8" x 21 Spline
7	G10985401	4	Rail Mount Nut
8	G10985101	1	Pump Mount Plate, 31 cm
9	G10985201	1	Pump Moun Plate, 33 cm
10	G10217	8	Washer, 5/8" USS
11	G10006	4	Hex Head Cap Screw, 5/8"-11 x 2 1/4"
12	G10107	4	Lock Nut, 5/8"-11
13	G10984201	4	Flat Washer, DIN 9021
14	G12039	12	Flat Washer, M12
15	G12002-60	4	Hex Head Cap Screw, M12-1,75 x 60
16	G10016	2	Hex Head Cap Screw, 1/2"-13 x 2"
17	G10111	2	Lock Nut, 1/2"-13
18	G10984101	1	LM 47 Long-Life Grease
19	G12015	2	Hex Lock Nut, M12-1,75
20	G12002-35	2	Hex Head Cap Screw, M12-1,75 x 35
21	G11114501	1	Collar, 1-3/8" (used with G10984901)
	G11114601	1	Collar, 1-3/4" (used with G10985001)
22	G12000-40	1	Hex Head Cap Screw, M10-1,5 x 40
	G12164	1	Hex Lock Nut, M10-1,5

(112120)

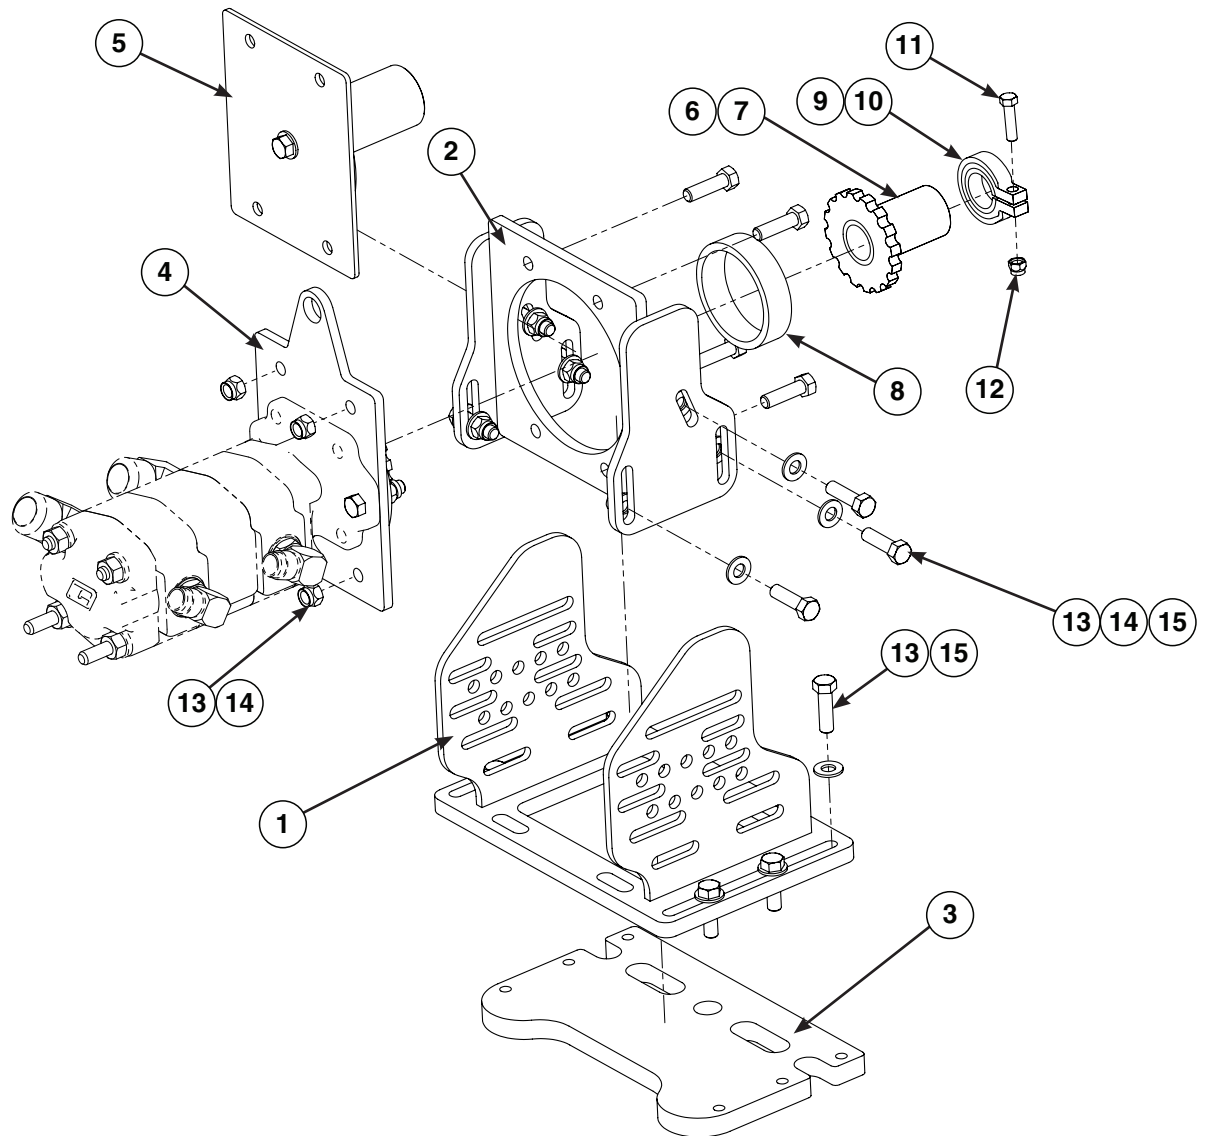


ITEM	PART NO.	QTY.	DESCRIPTION
1	G11211901	1	Tractor Mount
2	G11211801	1	Adapter Mount
3	G11211701	1	Plate
4	G11211601	1	See "Pump with Mount Adapter" on page P58
5	G11211501	1	See "Guide Tool" on page P59
6	G10984901	1	Long Sprocket, 16 Tooth, 1-3/8" x 21 Spline
7	G10985001	1	Long Sprocket, 16 Tooth, 1-3/4" x 20 Spline
8	G10984801	1	Chain with Link
9	G11114501	1	Collar, 1-3/8" (Used with G10984901)
10	G11114601	1	Collar, 1-3/4" (Used with G10985001)
11	G10003	1	Hex Head Cap Screw, 3/8"-16 x 1 1/2"
12	G10901	1	Lock Nut W/Nylon Insert, 3/8"-16
13	G10039	16	Hex Head Cap Screw, 1/2"-13 x 1 3/4"
14	G10111	10	Lock Nut, 1/2"-13
15	G11389	18	Flat Washer, 1/2" Plated SAE

(112116)

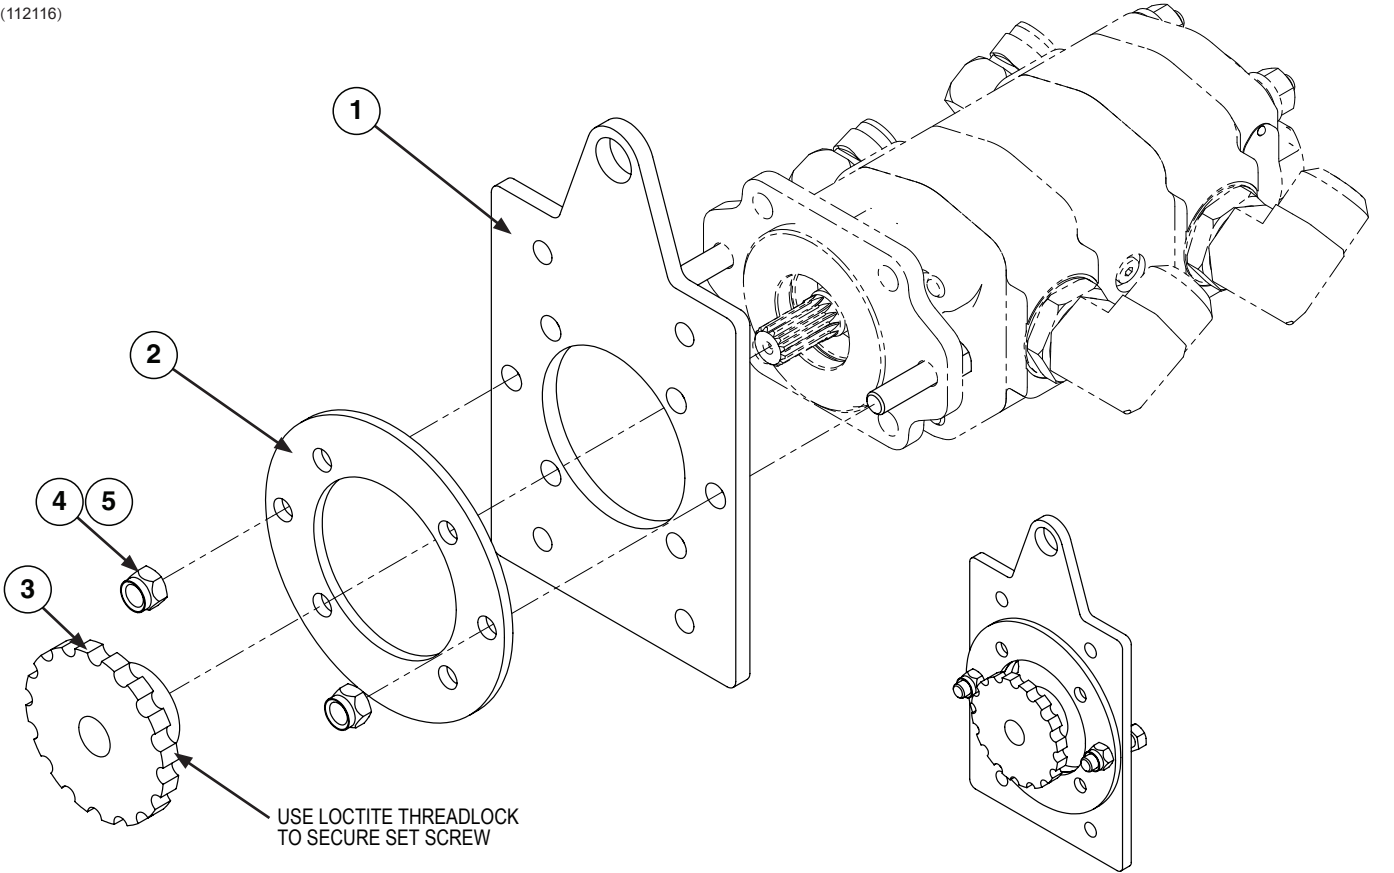


ITEM	PART NO.	QTY.	DESCRIPTION
1	G11212501	1	Pump Plate (Gear)
2	G11212601	1	Plate, 6.75 Ring
3	G10984701	1	Sprocket, 16 Tooth
4	G10016	2	Hex Head Cap Screw, 1/2" - 13 x 2"
5	G10111	2	Lock Nut, 1/2" - 13

(112115)

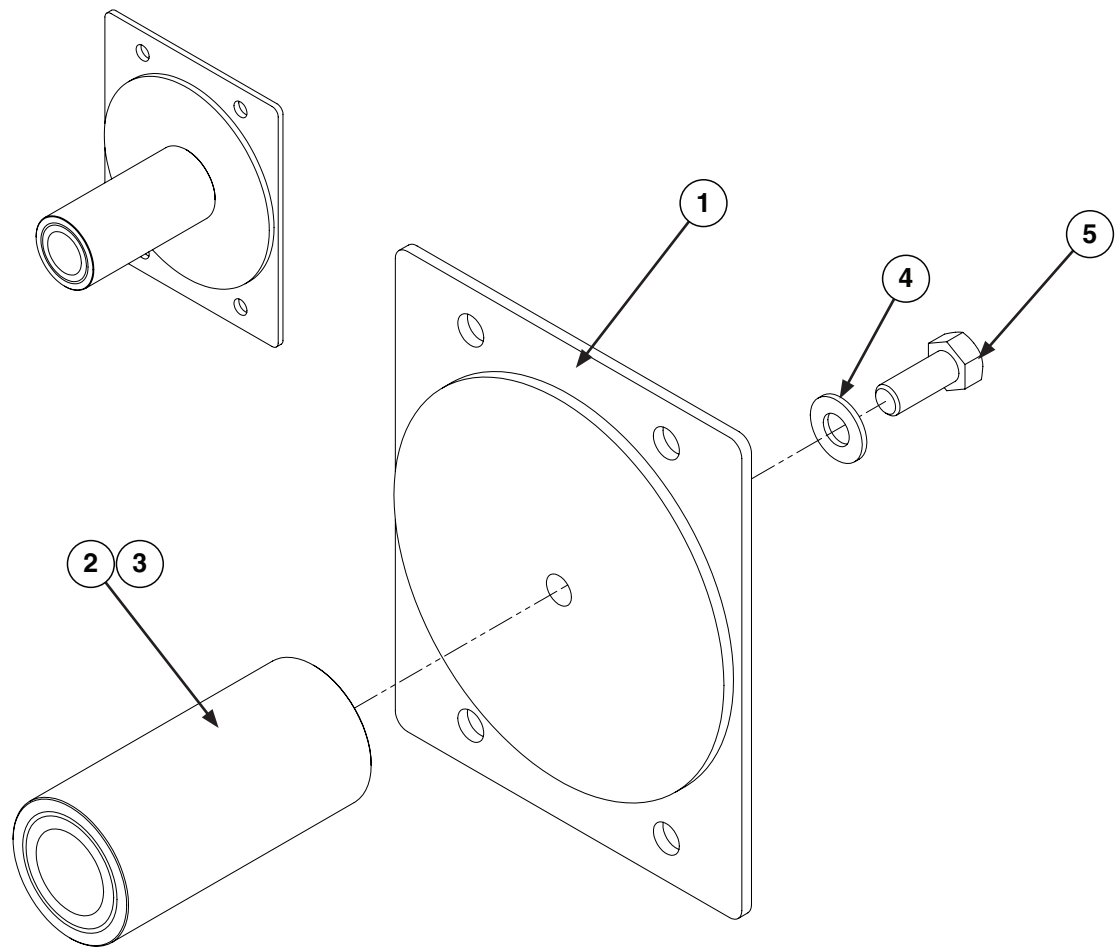

ITEM	PART NO.	QTY.	DESCRIPTION
1	G11212701	1	Guide Tool Base Plate (Gear)
2	G11212801	1	Aligment Tube, 1-3/4 (Use for 1-3/4-20 Spline PTO Shaft)
3	G11212901	1	Aligment Tube, 1-3/8 (Use for 1-3/8-21 Spline PTO Shaft)
4	G11389	1	Flat Washer, 1/2" Plated SAE
5	G10037	1	Hex Head Cap Screw, 1/2"-13 X 1 1/4"


(A13595/PT1j)

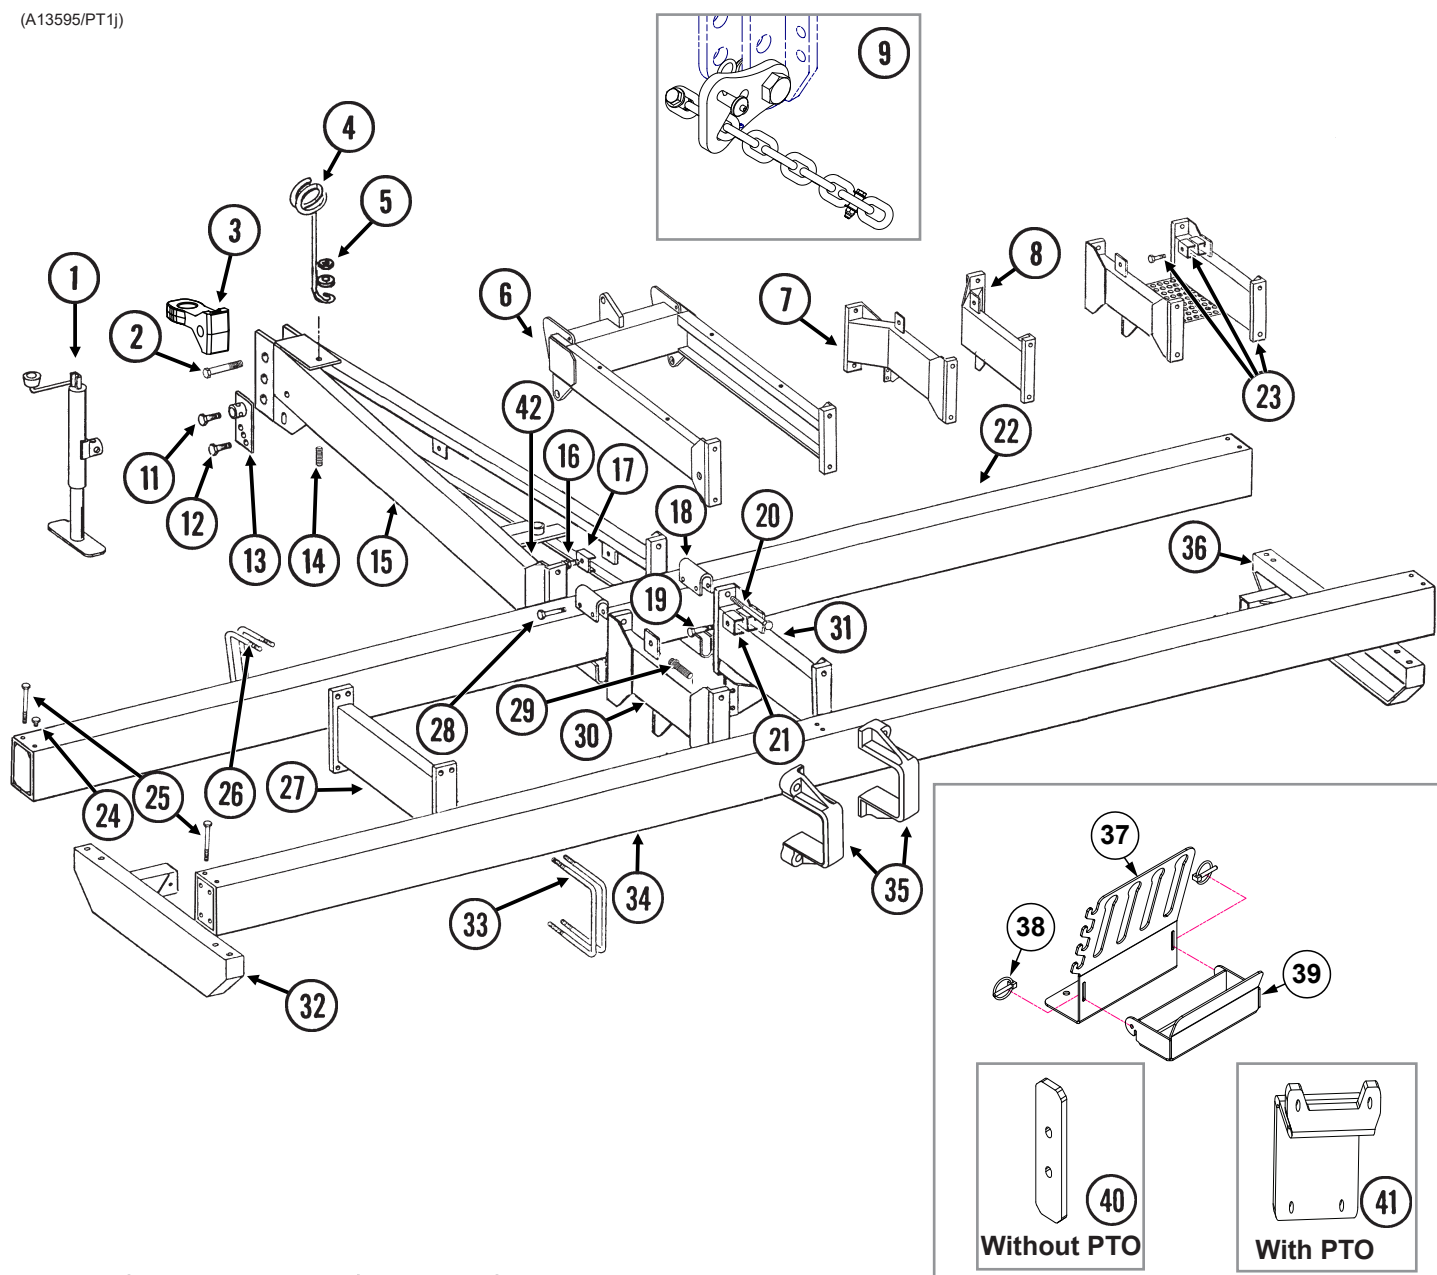

ITEM	PART NO.	QTY.	DESCRIPTION
1	G4100-02	1	Jack Assembly
	GR0255	-	Repair Kit (Chain and Pin)
2	G10169	1	Hex Head Cap Screw, 1 1/4"-7 x 6"
	G10157	1	Lock Nut, 1 1/4"-7
3	GB0292	1	Clevis
4	GD7140	1	Hose Holder
5	G10348	1	Hex Head Cap Screw, 1/2"-13 x 5"
	G11389	1	Flat Washer, 1/2" SAE
	G10228	1	Lock Washer, 1/2"
	G10102	1	Hex Nut, 1/2"-13
6	---	-	See "Split Row Self-Leveling Hitch Extension" on page P40
7	GA9429	-	Center Extension, L.H., Offset, 24"
8	GA9428	-	Center Extension, R.H., Offset, 24"
9	G9948X	1	3/8" Transport Safety Chain Package

ITEM	PART NO.	QTY.	DESCRIPTION
10	---	-	---
11	G10005	1	Hex Head Cap Screw, 5/8"-11 x 1 1/4"
	G10107	1	Lock Nut, 5/8"-11
12	G10017	1	Hex Head Cap Screw, 1/2"-13 x 1 1/2"
	G11389	1	Washer, 1/2" SAE
	G10111	1	Lock Nut, 1/2"-13
13	GA7909	1	Jack Adjustment Bracket
14	GD5888	1	Spring
15	GA8471	1	Hitch
16	G10048	2	Hex Head Cap Screw, 3/8"-16 x 2"
	G10108	2	Lock Nut, 3/8"-16
17	GD5875	2	Hose Clamp
18	GA5197	-	Spacer
19	G10048	-	Hex Head Cap Screw, 3/8"-16 x 2"
	G10108	-	Lock Nut, 3/8"-16
20	G10993	4	Hex Head Cap Screw, 1"-8 x 8 1/2", Grade 8
	G10396	4	Lock Nut, 1"-8
21	GD6027	-	Hose Clamp, 3/4" x 2 1/2" x 2 1/2"
22	A8013	1	Double Frame Toolbar, 7" x 5" x 180", 6 Row (Non-Stock Item)
	A8015	-	Double Frame Toolbar, 7" x 5" x 240", 8 Row (Non-Stock Item)
23	GA9007	-	Hitch Extension W/Hose Clamps and Hardware
	GD6027	-	Hose Clamp, 3/4" x 2 1/2" x 2 1/2" (Included W/GA9007)
	G10048	-	Hex Head Cap Screw, 3/8"-16 x 2" (Included W/GA9007)
	G10108	-	Lock Nut, 3/8"-16 (Included W/GA9007)
24	G10903	-	Cap Plug
25	G10895	8	Hex Head Cap Screw, 3/4"-10 x 8 1/2"
	G10112	8	Lock Nut, 3/4"-10
26	GD1113	-	U-Bolt, 5" x 7" x 5/8"-11 (Push Units/Front Rows)
	G10230	-	Lock Washer, 5/8"
	G10104	-	Hex Nut, 5/8"-11
27	GA4265	-	Straight Extension
28	G10061	4	Hex Head Cap Screw, 3/8"-16 x 3 1/2"
	G11387	4	Flat Washer, 3/8" SAE
	G10108	4	Lock Nut, 3/8"-16
29	G11085	4	Flanged Cap Screw, 12 Point, 1"-14 x 3"
30	GA9427	-	Hitch/Center Extension, L.H., Straight, 24"
31	GA9426	-	Hitch/Center Extension, R.H., Straight, 24"
32	GA9439	-	End Extension, L.H.
33	GD1114	-	U-Bolt, 7" x 7" x 5/8"-11 (Pull Units/Back Rows)
	G10230	-	Lock Washer, 5/8"
	G10104	-	Hex Nut, 5/8"-11
34	A8018	1	Toolbar, 7" x 7" x 180", 6 Row (Non-Stock Item)
	A8020	-	Toolbar, 7" x 7" x 240", 8 Row (Non-Stock Item)
35	GD29221	2	Hitch Clamp
36	GA9438	-	End Extension, R.H.
37	G10230201	1	Hydraulic Hose Holder
38	GD2558	2	Lynch Pin, 1/4"
39	GA25763	1	Hydraulic Hose Holder Cup
40	GD31433	4	Hydraulic Hose Holder Mount Plate
41	GD33279	1	See "Planter Mounted PTO Pump" on page P50
42	GA5187	1	Jack Mount


(IP1313)

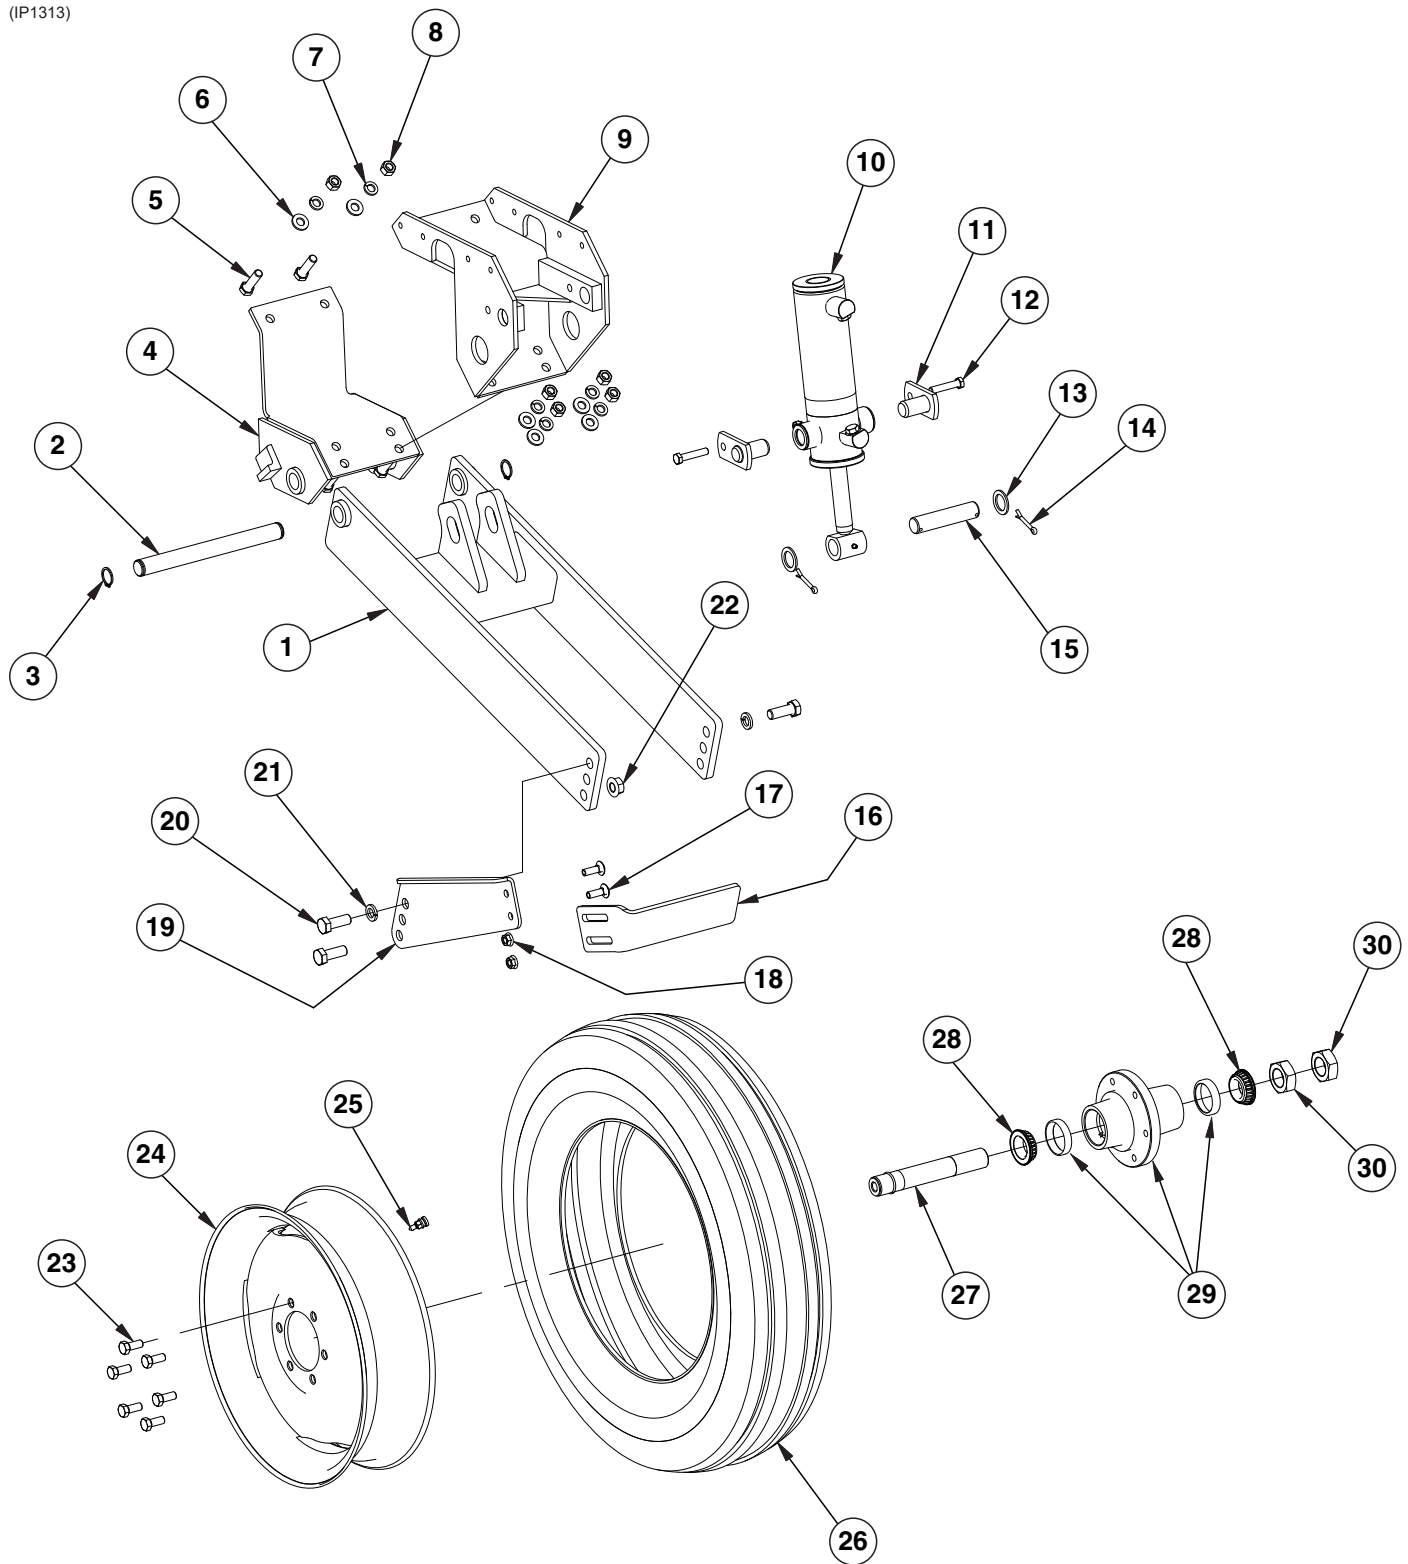

ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	GA14349	1	Wheel Module
2	GD20461	1	Pin, 1¼" x 13"
3	G11400	2	Retaining Ring, 1¼"
4	GA14348	1	Lower Half Clamp
5	G10006	6	Hex Head Cap Screw, ⅝"-11 x 2¼"
6	G11391	6	Flat Washer, ⅝" SAE
7	G10230	6	Lock Washer, ⅝"
8	G10104	6	Hex Nut, ⅝"-11
9	GA5122	1	Wheel Tower Clamp
10	---	1	See "Master Lift Cylinder" on page P122 See "Transport and Ground Drive Wheel Assembly" on page P62 See "Contact Wheel and Arm Assembly" on page P64
11	GA5121	2	Pin, 2⅛"
12	G10053	2	Hex Head Cap Screw, ½"-13 x 2 ½"
	G10111	2	Lock Nut, ½"-13
13	G10159	4	Washer, 1⅞"
14	G10460	2	Cotter Pin, ¼" x 2"
15	GD5841	1	Pin, 1¼" x 5⅝"
16	GD34178	1	Slotted Scraper
17	G10636	2	Carriage Bolt, ½"-13 x 1½"
18	G10071	2	Serrated Flange Nut, ½"-13
19	G10605101	1	Mud Scraper Holder
20	G10026	3	Hex Head Cap Screw, ¾"-10 x 2"
21	G10231	2	Lock Washer, ¾"
22	G11314	1	Serrated Flange Nut, ¾"-10
23	GR0270	6	Lug Bolt, ⅞"-18
24	GA14413	1	Rim, 5.50" x 20"
25	GA7434	1	Valve Stem
26	GD13401	1	Tire, 7.50" x 20", 8 Ply, Tubeless W/O Center Rib (Specify Brand*)
27	GA4376	1	Spindle Assembly
	GD11490	1	Round External Retaining Ring (Included W/GA4376)
	GD11458	1	Spindle (Included W/GA4376)
28	GA24825	2	Bearing
29	GA24826	1	Hub W/Cups, 6 Bolt
	GR0434	2	Cup (Included W/GA24826)
30	G11081	2	Hex Jam Nut, 1½"-12, Grade 2
A	GA24828	1	Hub and Spindle Assembly (Items 27-30)
C	GA14412	1	Tire and Rim Assembly (Items 24-26) (Specify Brand*)

* Specific brand requests will be supplied only as available from current Kinze Repair Parts stock. If a specific brand requested is not in stock, the brand available will be supplied.

(PT4p)

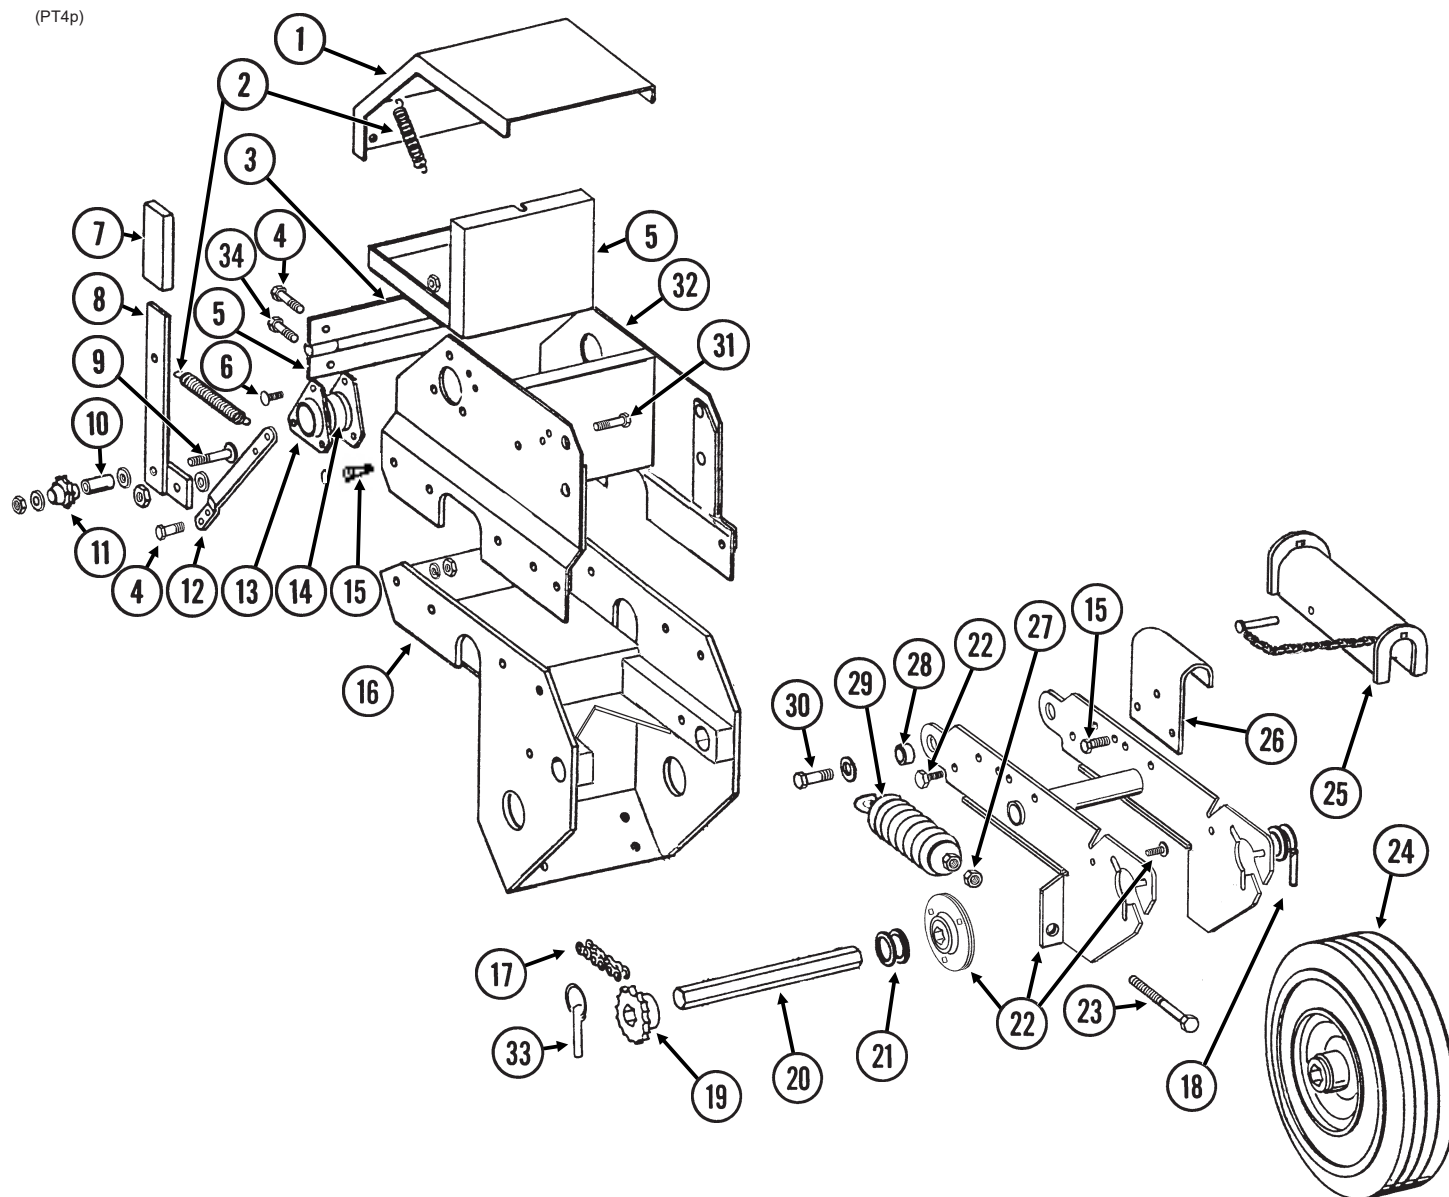


ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	GD5791	1	Cover
	G10860	-	Retaining Ring, $\frac{3}{8}$ "
	G10870	-	Clevis Pin, $\frac{3}{8}$ " x 1"
2	GD5857	2	Spring
3	GA13790	1	Slip Joint Assembly
	GD5789	1	Hinge W/Pins, Female (Included W/GA13790)
	GD5790	1	Hinge W/Pins, Male (Included W/GA13790)
4	G10064	4	Hex Head Cap Screw, $\frac{1}{4}$ "-20 x 1"
	G10621	4	Serrated Flange Nut, $\frac{1}{4}$ "-20
5	GA7235	1	Tool Box Insert
6	G10303	-	Carriage Bolt, $\frac{5}{16}$ "-18 x 1"
	G11386	-	Washer, $\frac{5}{16}$ " SAE (As Required)
	G10620	-	Serrated Flange Nut, $\frac{5}{16}$ "-18
7	GD5827	1	Cover

ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
8	GA5157	1	Idler Arm, L.H.
	GA5158	-	Idler Arm, R.H.
9	G10306	1	Carriage Bolt, 3/8"-16 x 2"
	G11387	-	Flat Washer, 3/8" SAE (As Required)
	G10108	1	Lock Nut, 3/8"-16
10	GD1026	1	Sleeve, 1 3/16" Long
11	GD7426	1	Sprocket, 12 Tooth
12	GD5860	1	Bar
13	G3400-01	-	Flangette
14	G2100-03	-	Bearing, 7/8" Hex Bore, Spherical
15	G10004	8	Hex Head Cap Screw, 3/8"-16 x 1 1/4"
	G10622	8	Serrated Flange Nut, 3/8"-16
16	---	-	See "Transport and Ground Drive Wheel Assembly" on page P62
17	G3310-132	1	Chain, No. 40, 132 Pitch Including Connector Link
	GR0912	-	Connector Link, No. 40
18	G10602	1	Spring Pin, 1/4" x 1 1/2"
19	GA5105	1	Sprocket, 15 Tooth
20	GD6825-10.5	1	Hex Shaft, 7/8" x 10 1/2" (2 Holes)
21	G10233	6	Machine Bushing, 1", 10 Gauge
22	A7370	1	Arm W/Flanged Bearings and Hardware (Non-Stock Item) (Sub G1K253)
	G10303	6	Carriage Bolt, 5/16"-18 x 1" (Included W/A7370)
	G10620	6	Serrated Flange Nut, 5/16"-18 (Included W/A7370)
	GA9846	2	Flanged Bearing, 7/8" Hex Bore (Included W/A7370)
	G10055	2	Hex Head Cap Screw, 5/8"-11 x 1 1/4" (Stop Bolt) (Included W/A7370)
	G10107	2	Lock Nut, 5/8"-11 (Included W/A7370)
23	G10890	2	Hex Head Adjusting Bolt, 1/2"-13 x 4", Grade 2
24	GA5090	1	Tire and Rim Assembly (Specify Brand*)
	GD5753	-	Tire, 4.10" x 6" (Specify Brand*) (Included W/GA5090)
	GD5752	-	Inner Tube (Included W/GA5090)
25	GA9870	-	Lockup W/Pin
	G10874	-	Detent Pin, 1/2" x 3 1/2" Grip (Included W/GA9870)
26	GD7944	1	Mount
27	G10501	2	Hex Jam Nut, 1/2"-13, Grade 2
28	GB0218	2	Bushing, 2 1/32" I.D. x 7/8" O.D. x 1 9/32" Long
29	GA2068	2	Spring W/Plug
30	G10005	2	Hex Head Cap Screw, 5/8"-11 x 1 3/4"
	G10235	6	Machine Bushing, 7/8", 14 Gauge
	G11391	2	Flat Washer, 5/8" SAE
	G10107	2	Lock Nut, 5/8"-11
31	G10004	1	Hex Head Cap Screw, 3/8"-16 x 1 1/4"
	G10229	1	Lock Washer, 3/8"
	G11387	1	Flat Washer, 3/8" SAE
	GD5756	1	Special Nut, 3/8"-16
32	GA5118	1	Mount
33	GD2558	1	Lynch Pin, 1/4"
34	G10064	2	Hex Head Cap Screw, 1/4"-20 x 1"
	G11385	2	Flat Washer, 1/4" SAE
	G10227	2	Lock Washer, 1/4"
	G10103	2	Hex Nut, 1/4"-20

A G1K253 - Contact Wheel Arm Replacement Kit, (Items 18, 20, 22, 23 and 27)

* Specific brand requests will be supplied only as available from current Kinze Repair Parts stock. If a specific brand requested is not in stock, the brand available will be supplied. Different brand tires may have different diameters. Change in tire brand may affect rates. Field checks are recommended after any change in contact tires.

(PT8k/PT8mm)

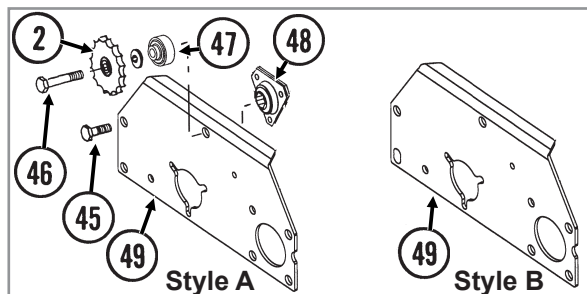

If replacing Style A (GD5830)

Must Order:

GD30624 X

GD30622


If replacing Style A (GD16302)

Must Order:

GD30624 X

GD30622 X


NOTE: Style A contains holes and Style B contains a slot.

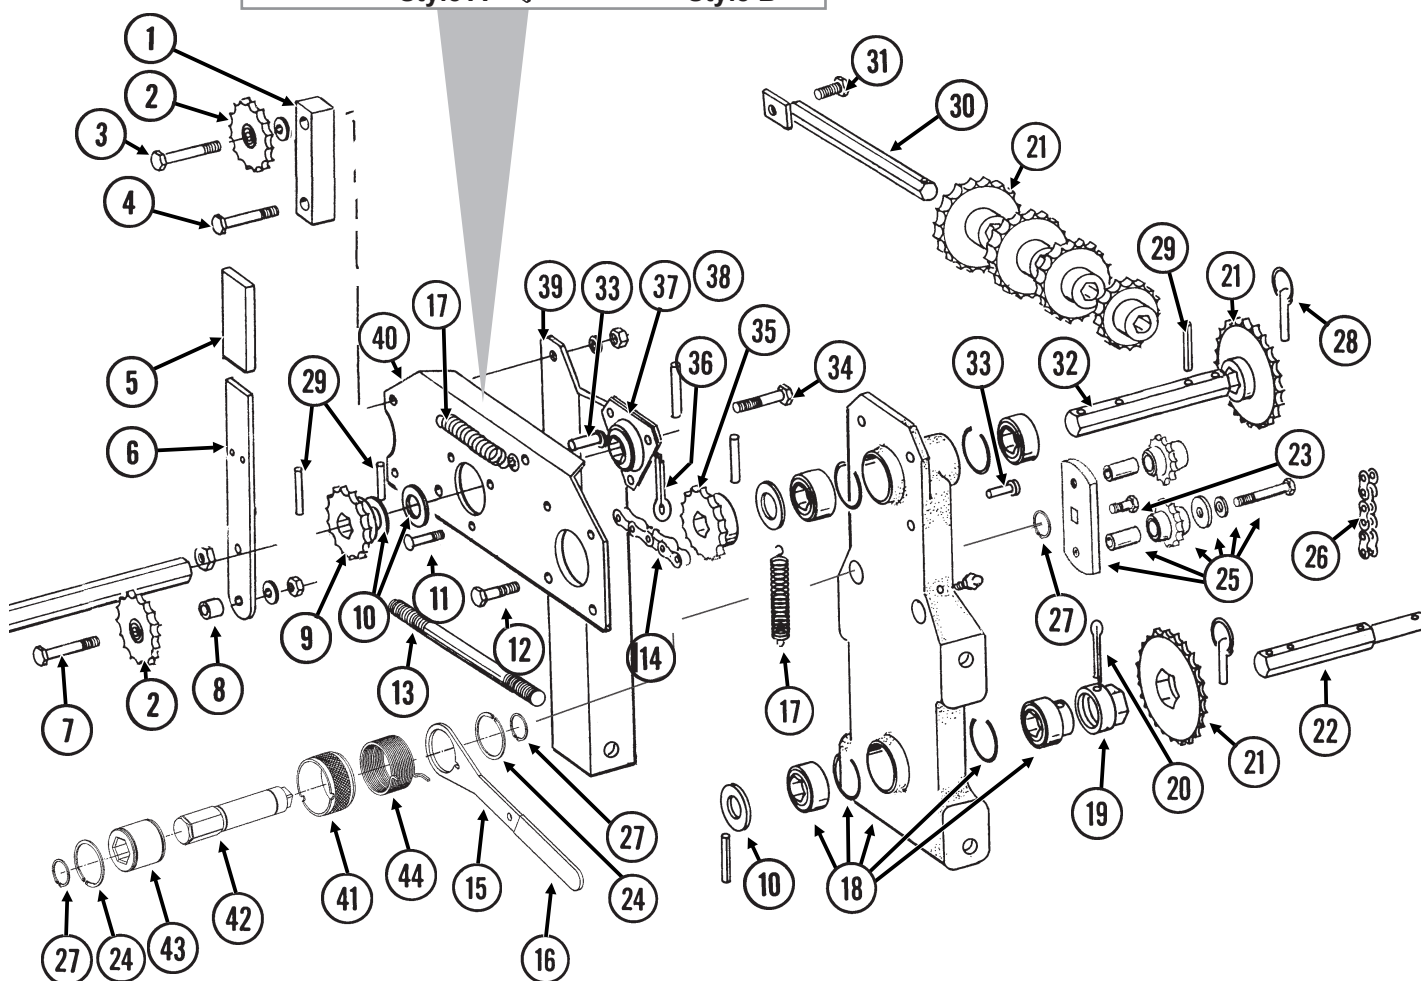

ITEM	PART NO.	QTY.	DESCRIPTION
1	GD12571	-	Spacer, 1" x 4"
2	GA7154	1	Sprocket W/Bearing, 18 Tooth
3	G10033	1	Hex Head Cap Screw, ½"-13 x 3½"
	G10128	-	Machine Bushing, ½", 14 Gauge (As Required)
	G10228	1	Lock Washer, ½"
	G10102	1	Hex Nut, ½"-13
4	G10053	1	Hex Head Cap Screw, ½"-13 x 2½"
	G10228	1	Lock Washer, ½"
	G10102	1	Hex Nut, ½"-13
5	GD5827	1	Cover
6	GD31450	1	Arm
7	G10053	1	Hex Head Cap Screw, ½"-13 x 2½"
	G10128	-	Machine Bushing, ½", 14 Gauge (As Required)
	G10228	1	Lock Washer, ½"
	G10102	1	Hex Nut, ½"-13
8	GD4887-01	1	Sleeve, ½" I.D. x ⅝" Long
9	GA5105	1	Sprocket, 15 Tooth
10	G10233	-	Machine Bushing, 1", 10 Gauge
11	G10303	3	Carriage Bolt, ⅝"-18 x 1"
	G10232	3	Lock Washer, ⅝"
	G10106	3	Hex Nut, ⅝"-18
12	G10037	3	Hex Head Cap Screw, ½"-13 x 1¼"
	G10228	3	Lock Washer, ½"
	G10102	3	Hex Nut, ½"-13
13	G10177	2	Hex Head Cap Screw, ⅝"-11 x 9½"
	G10230	2	Lock Washer, ⅝"
	G10104	2	Hex Nut, ⅝"-11
14	G3310-92	1	Chain, No. 40, 92 Pitch Including Connector Link
	G3310-100	-	Chain, No. 40, 100 Pitch Including Connector Link, Used With Half Rate (2 To 1) Drive Reduction
	GR0912	-	Connector Link, No. 40
15	GD14431	1	Handle
16	G11078	1	Vinyl Cap
17	GD5857	2	Spring
18	GA5629	1	Transmission Plate W/Bearings, Grease Fittings and Retaining Rings
	GA5116	3	Bearing, ⅞" Hex Bore, Cylindrical (Included W/GA5629)
	GA5624	1	Special Bearing, ⅞" Hex Bore x 1.6" (Included W/GA5629)
	GD6551	4	Ring (Included W/GA5629)
	G10640	-	Grease Fitting, ¼"-28 (Included W/GA5629)
19	GD7127	1	Shear Coupler
20	G10821	1	Clevis Pin, ⅜" x 2"
	G10455		Cotter Pin, ⅜" x ½"
21	GA5105	1	Sprocket, 15 Tooth
	GA5106	1	Sprocket, 17 Tooth
	GA5107	1	Sprocket, 19 Tooth
	GA5108	2	Sprocket, 23 Tooth
	GA5109	1	Sprocket, 24 Tooth
	GA5110	1	Sprocket, 25 Tooth
	GA5111	1	Sprocket, 26 Tooth
22	GD7822	1	Shaft, ⅞" x 7"
23	G11100	1	Hex Socket Button Head Cap Screw, ¼"-20 x ½", Grade 8
	G10227	1	Lock Washer, ¼"
	G11453	1	Fender Washer, ¼"
24	G10496	2	External Inverted Snap Ring, 1½"


ITEM	PART NO.	QTY.	DESCRIPTION
25	GA7336	1	Idler W/Bolt-On Sprockets
	GD7426	-	Sprocket, 12 Tooth (Included W/GA7336)
	GD1026	-	Sleeve, 1 $\frac{3}{16}$ " Long (Included W/GA7336)
	G11387	-	Flat Washer, $\frac{3}{8}$ " SAE (Included W/GA7336)
	G10229	-	Lock Washer, $\frac{3}{8}$ " (Included W/GA7336)
	G10047-	-	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x 1 $\frac{3}{4}$ " (Included W/GA7336)
26	G3310-80	1	Chain, No. 40, 80 Pitch Including Connector Link
	GR0912	-	Connector Link, No. 40
27	G11075	3	External Inverted Snap Ring, $\frac{7}{8}$ "
28	GD2558	3	Lynch Pin, $\frac{1}{4}$ "
29	G10602	5	Spring Pin, $\frac{1}{4}$ " x 1 $\frac{1}{2}$ "
30	G10961801	1	Sprocket Storage Rod
31	G10017	1	Hex Head Cap Screw, $\frac{1}{2}$ "-13 x 1 $\frac{1}{2}$ "
	G10527	1	Lock Washer, $\frac{1}{2}$ ", Internal/External
	G10111	1	Lock Nut, $\frac{1}{2}$ "-13
32	GD5835	1	Shaft, $\frac{7}{8}$ " x 7"
33	G10870	1	Clevis Pin, $\frac{3}{8}$ " x 1"
	G10860	1	Retaining Ring, $\frac{3}{8}$ "
34	G10004	1	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x 1 $\frac{1}{4}$ "
	G10229	1	Lock Washer, $\frac{3}{8}$ "
	G11387	1	Flat Washer, $\frac{3}{8}$ " SAE
	GD15538	2	Spacer, $\frac{3}{8}$ " I.D. x $\frac{7}{8}$ " O.D., 7 Gauge
	GD5756	1	Special Nut, $\frac{3}{8}$ "-16
35	GA5106	1	Sprocket, 17 Tooth, Standard Drive
	GA5202	-	Sprocket, 34 Tooth, Half Rate (2 To 1) Drive Reduction
36	G10460	1	Cotter Pin, $\frac{1}{4}$ " x 2"
37	G2100-03	1	Bearing, $\frac{7}{8}$ " Hex Bore, Spherical
38	G3400-01	2	Flangette
39	GD5830	1	Angle Support, R.H. (Style A) (Replaced with GD30624)
	GD30624	1	Angle Support, R.H. (Style B)
40	GD5824	1	Plate, R.H.
41	GD19343	1	Release Collar, R.H.
42	GD14427	1	Tightener Shaft, 4 $\frac{7}{8}$
43	GD14432	1	Sleeve, 1 $\frac{1}{4}$ "
44	GD14413	1	Torsion Spring, L.H. (Used On R.H. Wrap Spring Wrench)
45	G10017	2	Hex Head Cap Screw, $\frac{1}{2}$ "-13 x 1 $\frac{1}{2}$ "
	G10228	2	Lock Washer, $\frac{1}{2}$ "
	G10102	2	Hex Nut, $\frac{1}{2}$ "-13
46	G10038	1	Hex Head Cap Screw, $\frac{1}{2}$ "-13 x 3"
	G10128	-	Machine Bushing, $\frac{1}{2}$ ", 14 Gauge (As Required)
	G10228	1	Lock Washer, $\frac{1}{2}$ "
	G10102	1	Hex Nut, $\frac{1}{2}$ "-13
47	GB0259	-	Spacer, 1"
48	GA7841	-	Bearing, $\frac{7}{8}$ " Hex Bore
49	GD16302	-	Reverser Plate (Style A) (Replaced With GD30622)
	GD30622	-	Reverser Plate (Style B)
A	G1K378	-	Wrap Spring Wrench Replacement Kit, Blue Collar, R.H. (Items 15, 16, 23, 24, 27 and 41-44)

PTD016/PTD034(PT6/PT7c)

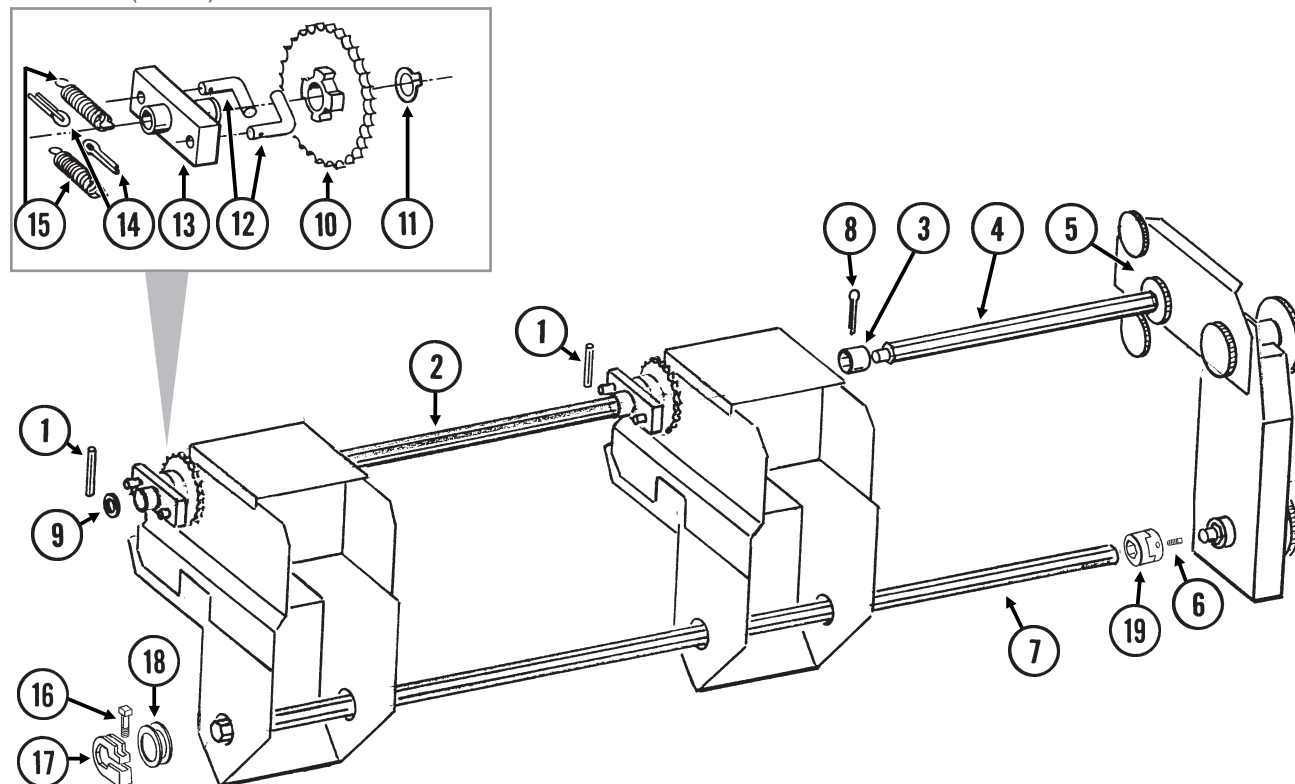


ITEM	PART NO.	QTY.	DESCRIPTION
1	G10602	2	Spring Pin, 1/4" x 1 1/2"
2	GD5884-01	1	Hex Shaft, 7/8" x 36" (3 Holes)
3	GD5961	1	Coupler, 2 1/4"
4	GD5885-01	1	Hex Shaft, 7/8" x (6 Holes), 6 Row and 8 Row
5	---	-	See "Seed Rate Transmission Assembly" on page P66
6	G10131	4	Square Head Set Screw, 5/16"-18 x 3/4"
7	GD0914-170	1	Hex Shaft, 7/8" x 170" (No Holes), 6 Row
	GD0914-230	-	Hex Shaft, 7/8" x 230" (No Holes), 8 Row
8	G10460	2	Cotter Pin, 1/4" x 2"
9	G10233	-	Machine Bushing, 1", 10 Gauge (As Required)
10	GA5165	1	Sprocket, 30 Tooth
11	G10430	1	External Retaining Ring, 1 1/4"
12	GD1255	2	L-Pin
13	GA0378	1	Block and Hub Assembly
14	G10453	2	Cotter Pin, 3/16" x 1"
15	GD1256	2	Spring
16	G10130	1	Square Head Machine Bolt, 5/16"-18 x 1 3/4"
	G10923	1	Flange Nut, 5/16"-18, No Serration
17	GD11045	1	Lock Clamp
18	G10233	2	Machine Bushing, 1", 10 Gauge
19	GB0287	2	Coupler
A	GA5164	-	Ratchet/Sprocket Assembly, Includes: (2) GD1256, (2) G10464,
B	G1K269	-	Lock Clamp Kit (Items 16 and 17)

MKR010(MKR1a)

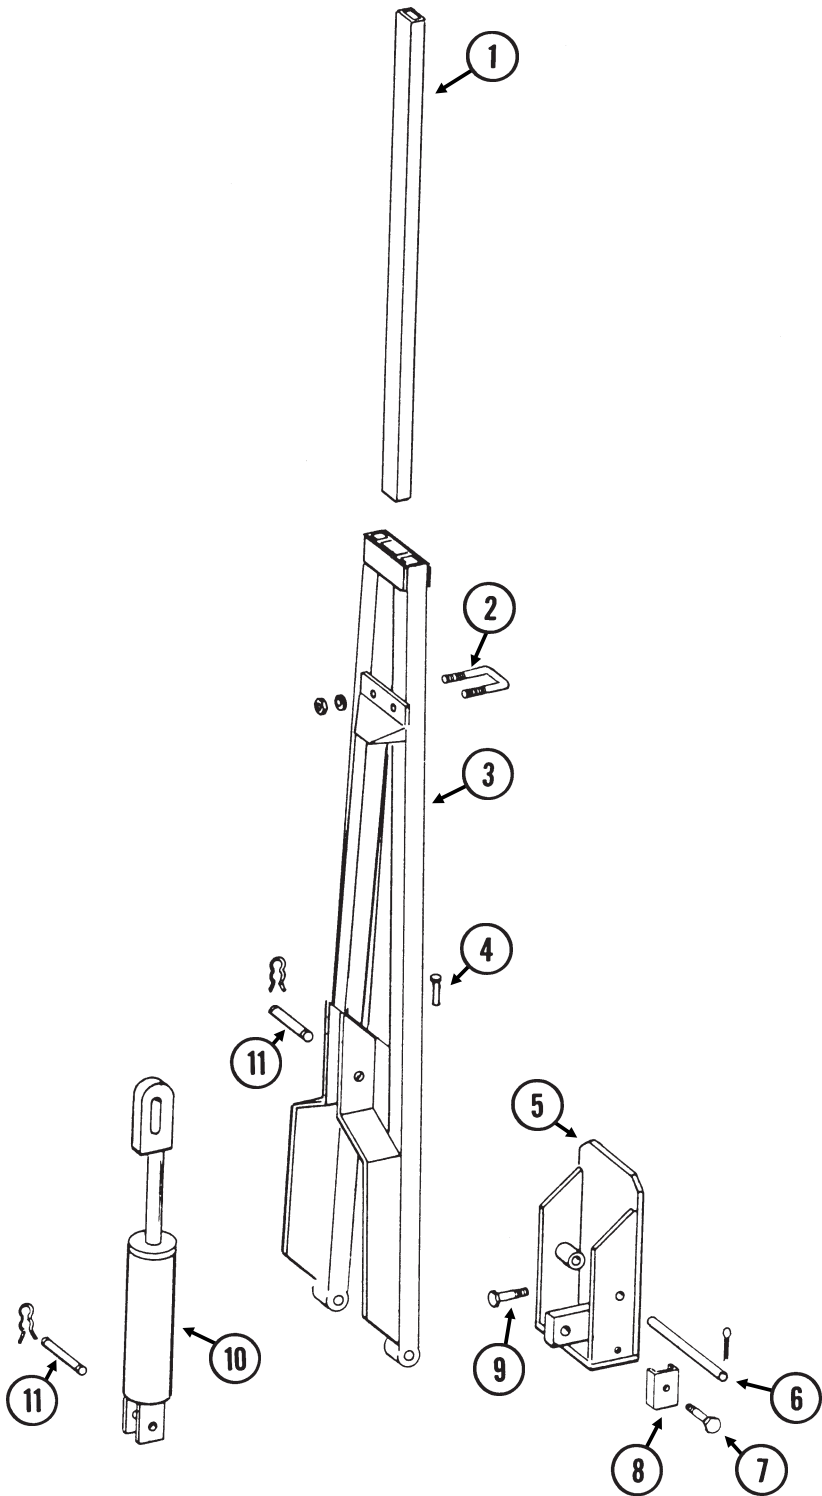


ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	GD0453-05	1	Extension Tube, 55", 6/8 Row
2	GD2721	1	U-Bolt, 2" x 2" x 1/2"-13
	G10228	2	Lock Washer, 1/2"
	G10102	2	Hex Nut, 1/2"-13
3	GA5183	1	Arm W/Grease Fittings, 58 1/2", 6/8 Row
	G10640	-	Grease Fitting, 1/4"-28 (Included W/GA5175, GA5184, or GA5183)
4	GD0462	1	Safety Lockup Pin
	G10670	1	Hair Pin Clip, No. 3
	G10187	1	Spring Pin, 5/32" x 2"
5	GA5178	1	Mount W/Grease Fittings, 6/8 Row
	G10640	-	Grease Fitting, 1/4"-28 (Included W/GA5177 or GA5178)
6	GD0438	1	Pivot Shaft
	G10460	2	Cotter Pin, 1/4" x 2"
7	G10003	1	Hex Head Cap Screw, 3/8"-16 x 1 1/2"
	G10108	1	Lock Nut, 3/8"-16
8	GD5892	1	Hose Clamp, 5/8" x 1 1/2" x 1 1/2"
9	G10008	4	Hex Head Cap Screw, 5/8"-11 x 2"
	G10230	4	Lock Washer, 5/8"
10	---	-	See "Row Marker Cylinder, 6 Row" on page 125
11	GR0962	1	Pin, 1" x 3 3/8"
	GR0193	2	Hair Pin Clip

MKR006/MKR009(MKR2ff)

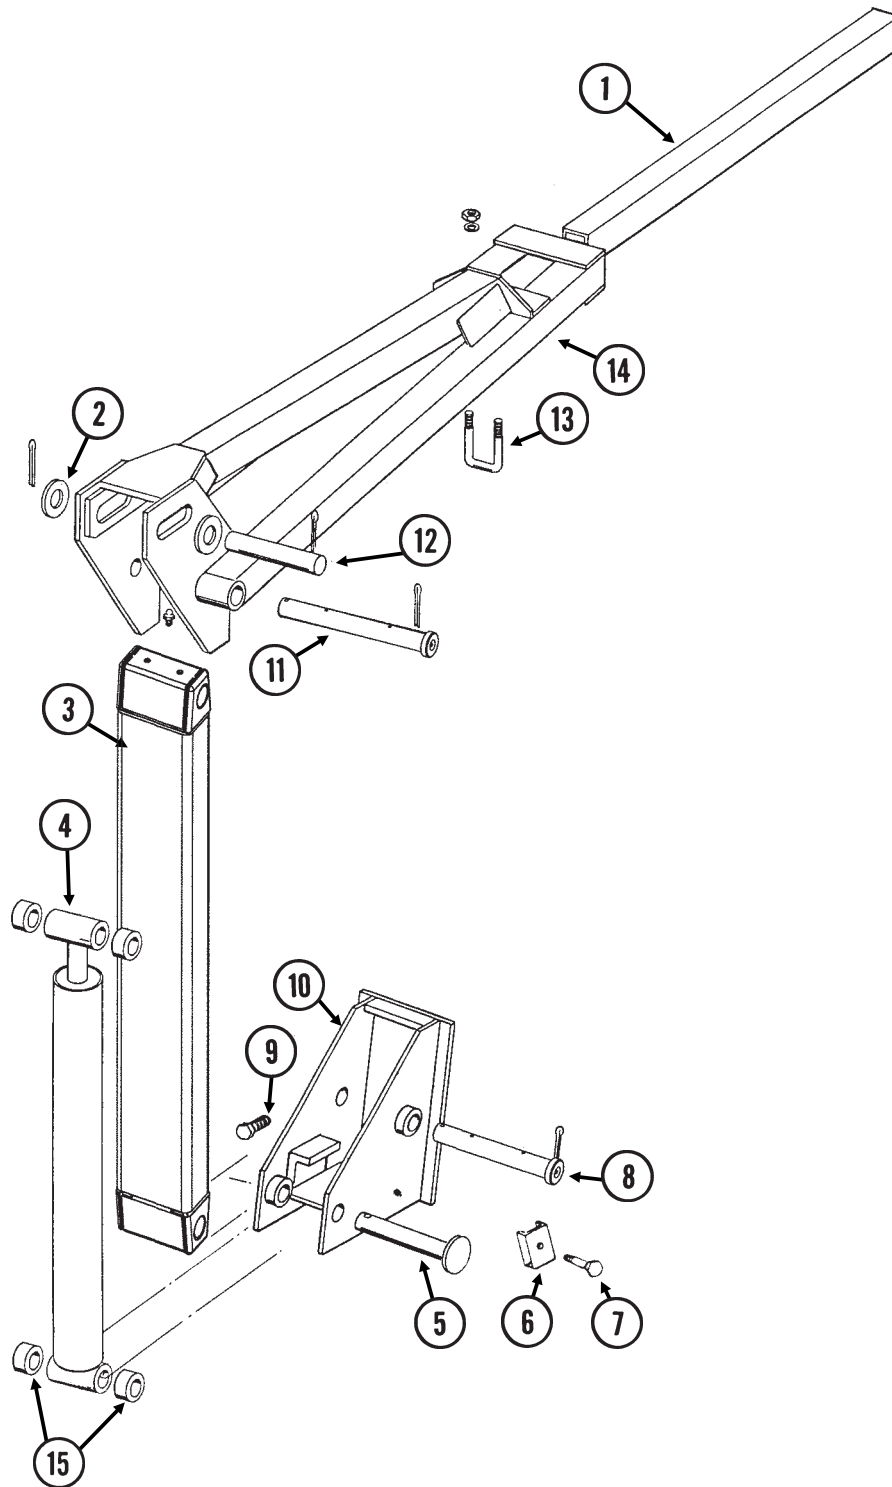


ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	GD0453-03	1	Extension Tube, 50", 8 Row 30"
2	G11396	2	Flat Washer, 1¼" SAE
3	GA11591	-	Arm, First Stage
4	---	-	See "Row Marker Cylinder, 8 Row" on page P126
5	GD15386	1	Pin, 1¼" x 7 ⁵ / ₈ "
	G10460	1	Cotter Pin, ¼" x 2"
6	GD5875	1	Hose Clamp
7	G10133	1	Hex Head Cap Screw, 5 ¹ / ₆ "-18 x 1½"
	G10109	1	Lock Nut, 5 ¹ / ₆ "-18, Grade 8
8	GA11767	-	Pin W/Grease Fitting, 1¼" x 9½"
	G10640	-	Grease Fitting, ¼"-28 (Included W/GA11767)
	G10460	1	Cotter Pin, ¼" x 2" (Included W/GA11767)
9	G10879	4	Flanged 12 Point Bolt, 5 ⁵ / ₈ "-11 x 2", Special Hardened
10	GA5130	1	Mount
11	GA11766	-	Pin W/Grease Fitting, 1¼" x 11 ¹³ / ₁₆ "
	G10640	-	Grease Fitting, ¼"-28 (Included W/GA11766)
	G10460	1	Cotter Pin, ¼" x 2" (Included W/GA11766)
12	GD2161	1	Pin, 1¼" x 8¾"
	G10460	2	Cotter Pin, ¼" x 2"
13	GD2721	1	U-Bolt, 2" x 2" x ½"-13
	G10228	2	Lock Washer, ½"
	G10102	2	Hex Nut, ½"-13
14	GA5188	1	Arm, Second Stage, 35", 6 Row 36"/38"
15	GD0752-41	-	Sleeve, 1" (If Applicable)

IP1035aa

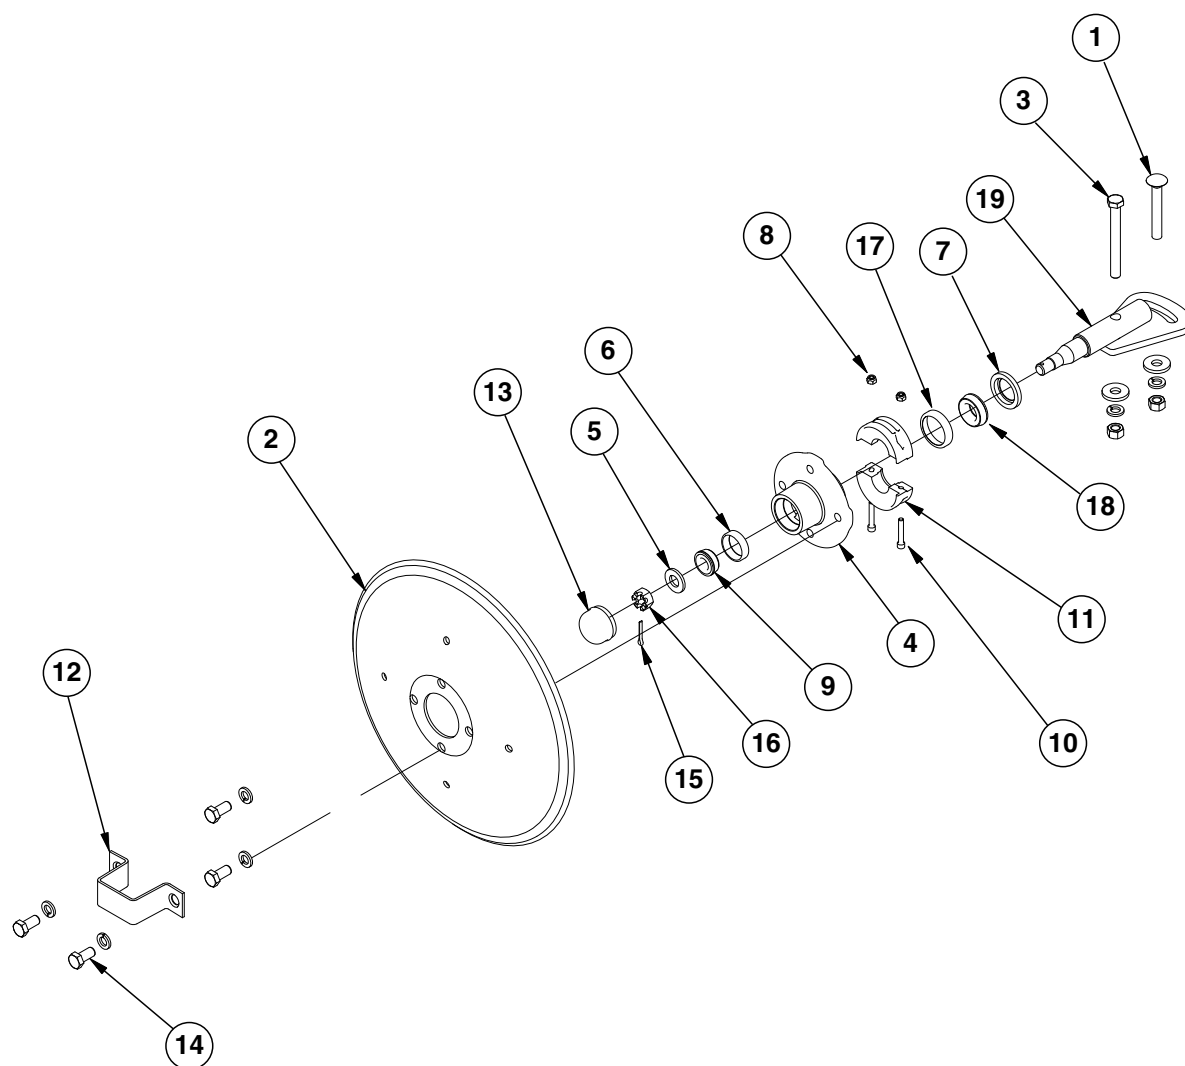


ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	G10844	1	Carriage Bolt, ½"-13 x 3½"
	G10168	2	Machine Bushing, ½", 7 Gauge
	G10228	2	Lock Washer, ½"
	G10102	2	Hex Nut, ½"-13
2	GD0746	1	Disc Blade, Solid, 16" (Shown)
	GD10283	-	Disc Blade, Notched, 16" (Optional)
3	G10045	1	Hex Head Cap Screw, ½"-13 x 4½"
	G10168	2	Machine Bushing, ½", 7 Gauge
	G10228	2	Lock Washer, ½"
	G10102	2	Hex Nut, ½"-13
4	GA0167	1	Hub W/Cups, 4 Bolt (Includes Items 6 and 17)
5	G11391	1	Flat Washer, ⅝" SAE
6	GR0151	1	Outer Cup
7	GD21540	1	Grease Seal
8	G10110	2	Lock Nut, ¼"-20, Grade B
9	GA0257	1	Bearing
10	G11418	2	Hex Socket Head Cap Screw, ¼" x 1½"
11	GB0554	2	Hub Shield
12	GD2597	1	Retainer
13	GD0840	1	Dust Cap
14	G10722	4	Hex Head Cap Screw, ½"-20 x 1"
	G10228	4	Lock Washer, ½"
15	G10544	1	Cotter Pin, ⅝" x 1"
16	G10725	1	Slotted Hex Nut, ⅝"-18
17	GR0150	1	Inner Cup
18	GA0245	1	Bearing
19	GA15151	1	Spindle

A21003

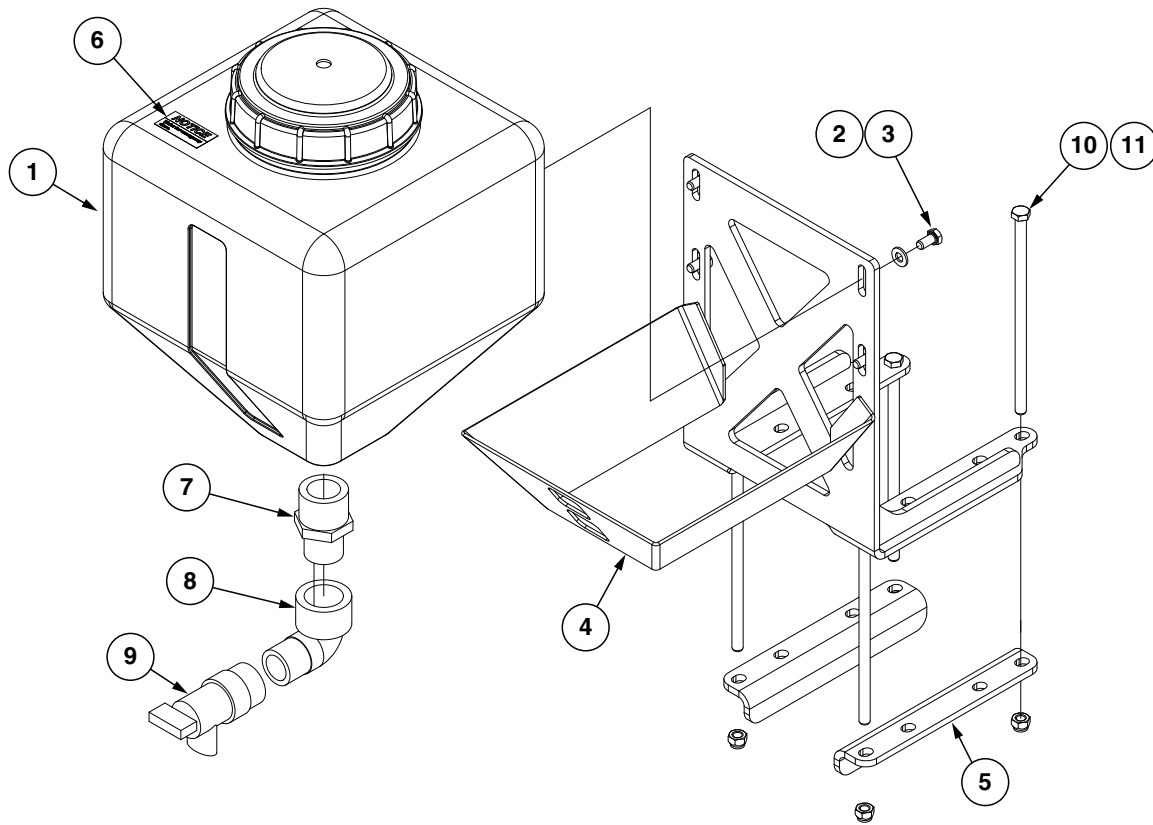




ITEM	PART NO.	QTY.	DESCRIPTION
1	GD30723	1	4 Gallon Water Tank W/Lid
2	G11386	4	Flat Washer, $\frac{5}{16}$ " SAE
3	G10018	4	Hex Head Cap Screw, $\frac{5}{16}$ "-18 x $\frac{5}{8}$ "
4	GA21002	1	Water Tank Mount
5	GD30221	2	Water Tank Mount Brackets
6	G10383201	1	Decal, Notice
7	G10727	1	Reducing Nipple, 1-1/4" x 1"
8	G11742	1	1" NPT 90° Elbow
9	GD30722	1	1" NPTF Flush Valve
10	G10686	4	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x 8"
11	G10108	4	Lock Nut, $\frac{3}{8}$ "-16

(PT2j)

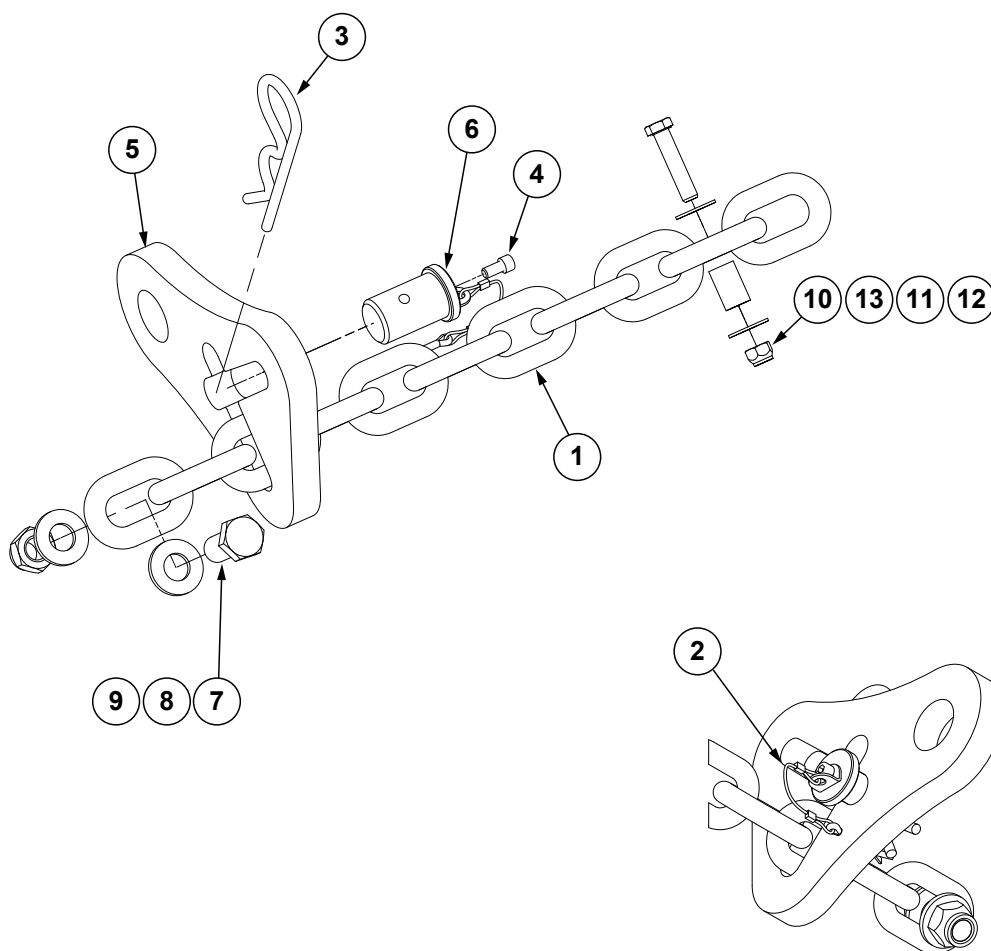

ITEM	PART NO.	QTY.	DESCRIPTION
1	G3324-01	1	Safety Chain, 13MM Grade 70, 97½"
2	GD35339	1	Looped Tether W/Tabs and Cotter Pin
3	G10671	1	Hairpin Cotter, ⅜" x 3¼"
4	G11874	1	Hex Socket Head Cap Screw, ¼"-20 x ½"
5	GD35127	1	Single Chain Latch
6	GD35340	1	Chain Latch Pin
7	G10007	1	Hex Head Cap Screw, ⅝"-11 x 1½"
8	G11391	2	Flat Washer, ⅝" SAE
9	G10107	1	Lock Nut, ⅝"-11
10	G10108	1	Lock Nut, ⅜"-16
11	GD8893-07	1	Sleeve, 1" Long
12	G10047	1	Hex Head Cap Screw, ⅜"-16 x 1¾"
13	G10210	2	Washer, ⅜" USS
A	G9948X	-	⅜" Transport Safety Chain Package (Items 1-13)


PFA052/PFA055(ELC9/A9206a/MTR27a/ELC8/PT49f)

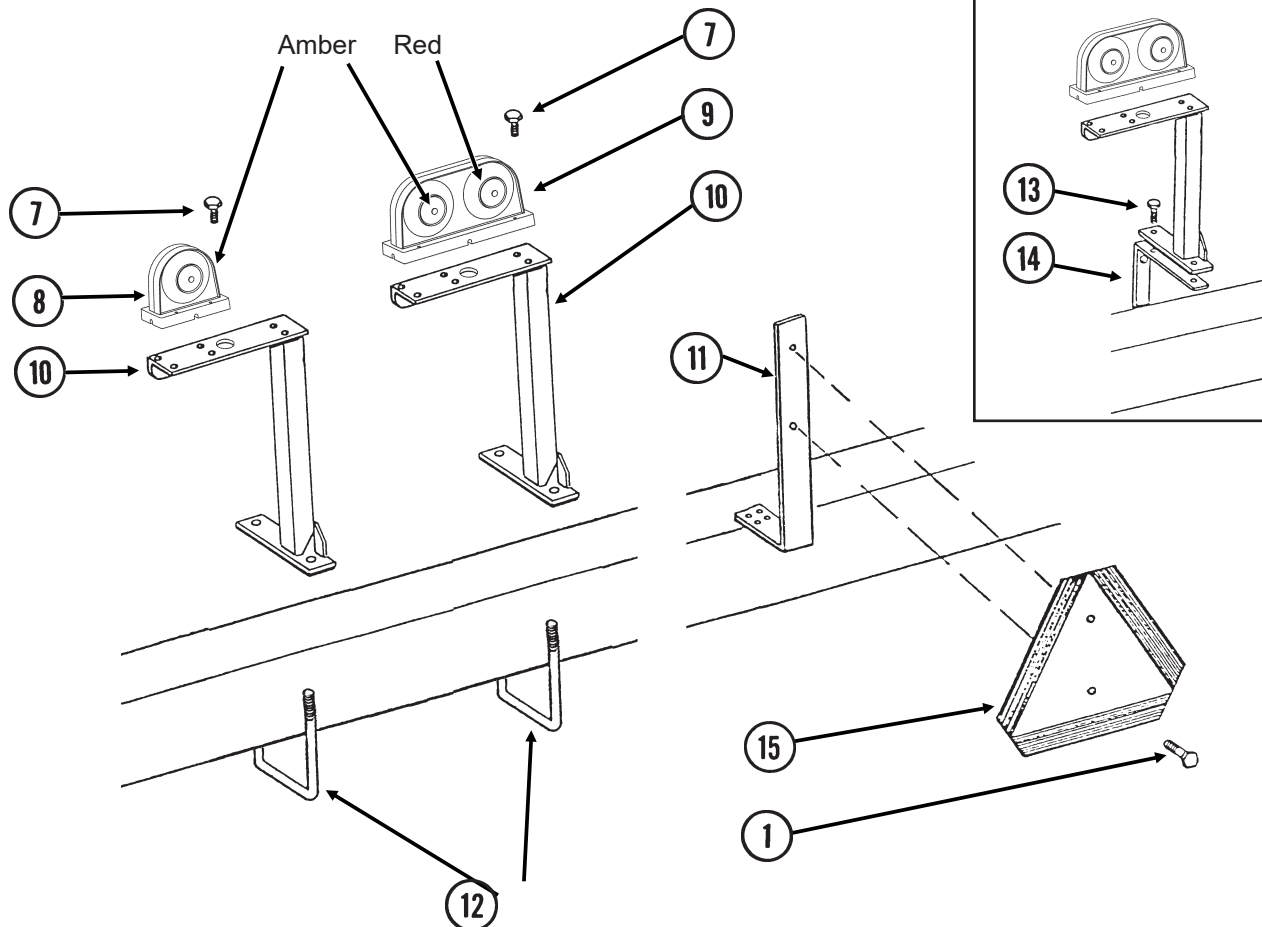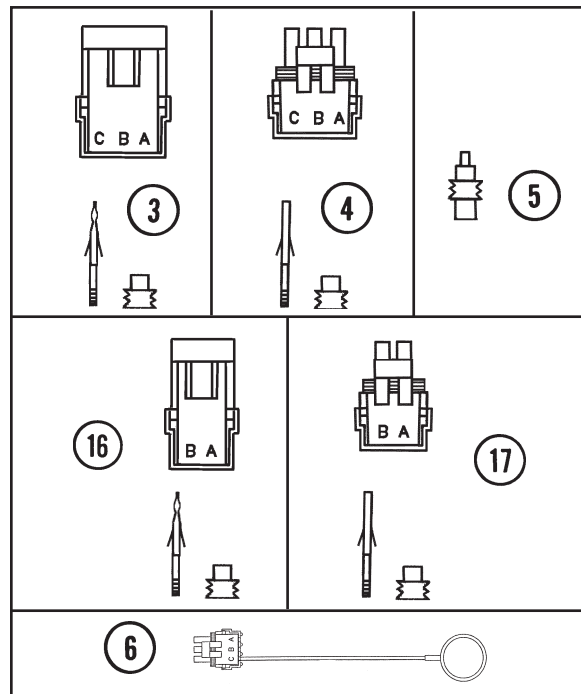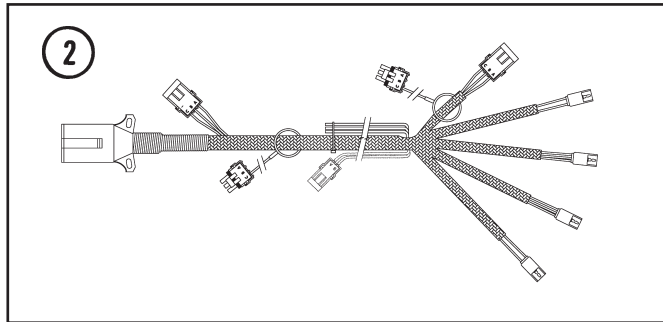


ITEM	PART NO.	QTY.	DESCRIPTION
1	G10023	2	Hex Head Cap Screw, 1/4"-20 x 3/4"
	G10110	2	Lock Nut, 1/4"-20, Grade B
2	GA9207	-	Wiring Harness W/7 Terminal Female Connector, 329", 6 Row (4 Light Connections)
	GA9206	-	Wiring Harness W/7 Terminal Female Connector, 396", 8 Row (4 Light Connections)
	GA25321	-	Eu Harness Adapter
	GA5385	-	7 Terminal Female Connector
3	G1K248	-	3-Pin Female Connector Kit (Black), Includes: (3) 3-Pin Female Housings, (9) Pin Contacts, (9) Seals
4	G1K252	-	3-Pin Male Connector Kit (Black), Includes: (3) 3-Pin Male Housings, (9) Socket Contacts, (9) Seals
5	GD11089	-	Sealing Plug
6	GA8047	-	Dust Plug (Black)
7	G10064	8-16	Hex Head Cap Screw, 1/4"-20 x 1"
	G11385	8-16	Flat Washer, 1/4" SAE
	G10110	8-16	Lock Nut, 1/4"-20, Grade B
8	GA6701	1	Single Amber Light Assembly
	GR1956	-	Amber Lens Kit, Includes: (1) Amber Lens, (1) Gasket, and (3) Hex Head Cap Screws (Included W/GA6701)
	GR1208	-	Bulb (Included W/GA6701)
9	GA6699	1	Double Light Assembly
	GA6700	1	Double Light Assembly (Shown)
	GR1956	-	Amber Lens Kit, Includes: (1) Amber Lens, (1) Gasket, and (3) Hex Head Cap Screws
	GR1957	-	(Included W/GA6699 or GA6700)
	GR1958	-	Red Lens Kit, Includes: (1) Red Lens, (1) Gasket, and (3) Hex Head Cap Screws (Included W/GA6699 or GA6700)
	GR1208	-	Black Cover Kit, Includes: (1) Black Cover, (1) Gasket, and (3) Hex Head Cap Screws (Included W/GA6699 or GA6700)
		-	Bulb
10	GA6823	1	Bracket, L.H. (Shown)
	GA6824	1	Bracket, R.H.
11	GD7152	1	Bracket
12	GD7145	2-4	U-Bolt, 7" x 7" x 1/2"-13
	G10228	4-8	Lock Washer, 1/2"
	G10102	4-8	Hex Nut, 1/2"-13
13	G10039	-	Hex Head Cap Screw, 1/2"-13 x 1 3/4"
	G10228	-	Lock Washer, 1/2"
	G10102	-	Hex Nut, 1/2"-13
14	GD8304	-	Bracket (Used To Mount Light Bracket When HD Single Disc Fertilizer Openers Are Used)
15	GD2199	1	SMV Sign
16	G1K321	-	2-Pin Female Connector Kit (Black), Includes: (3) 2-Pin Female Housings, (6) Pin Contacts, (6) Seals
17	G1K320	-	2-Pin Male Connector Kit (Black), Includes: (3) 2-Pin Male Housings, (6) Socket Contacts, (6) Seals
18	GA26751	1	EU Harness Powder Adapter

(MTR46dd)


Magnetic Distance Sensor (MDS)

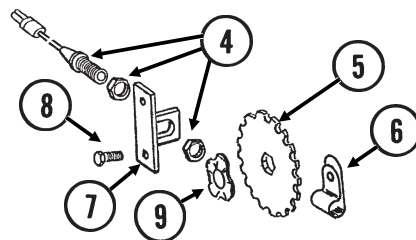


Shaft Rotation Sensor

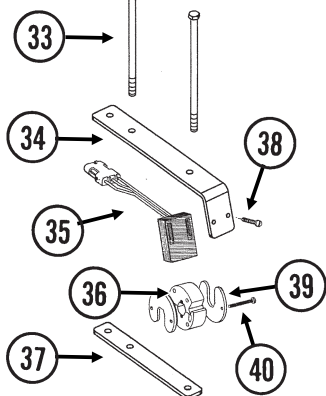

Power Lead Adapter

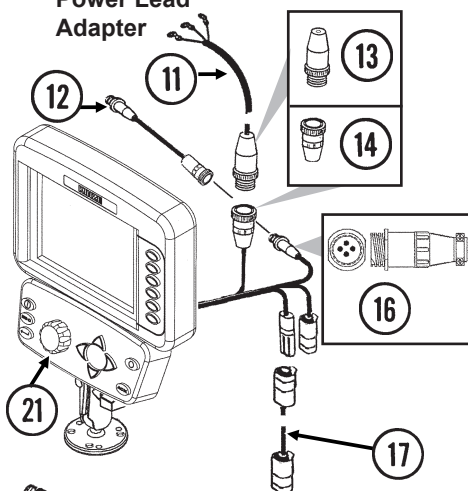





Planter Harness

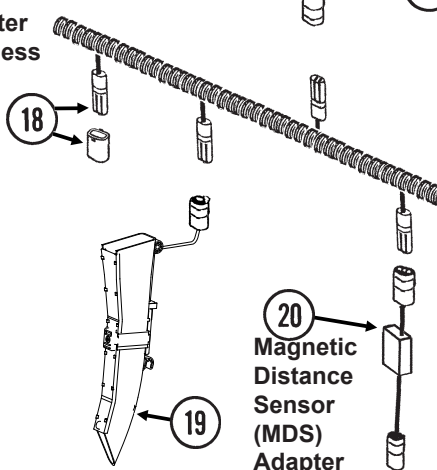

Magnetic Distance Sensor (MDS) Adapter

Radar Y-Cable

Adapter Harness


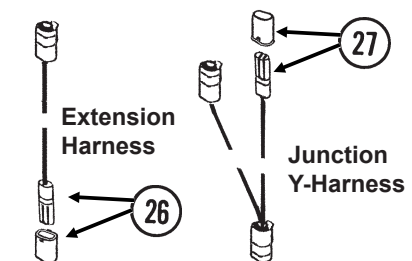


ITEM	PART NO.	QTY.	DESCRIPTION
1	---	-	---
2	---	-	---
3	---	-	---
4	GA5600	1	Magnetic Distance Sensor
5	GD8751	-	Magnetic Distance Sensor Pulse Wheel
6	GD13348	-	Insulated Clamp, 11/16"
7	GD8770	1	Bracket
8	G10001	2	Hex Head Cap Screw, 3/8"-16 x 1"
	G10229	2	Lock Washer, 3/8"
	G10101	2	Hex Nut, 3/8"-16
9	GD8771	1	Spring Wave Washer
10	---	-	---
11	GA7856	1	Power Lead Adapter
12	GA9144	-	Monitor/Radar Adapter Cable, 10"
13	G1K267	-	Power Lead Adapter Connector Kit, Includes: (1) Cable Clamp, (1) 3-Pin Connector, (3) Male Terminal Pins
14	G1K268	-	Console Cable Connector Kit, Includes: (1) Cable Clamp, (1) 3-Pin Connector, (1) Lock Ring, (3) Female Terminal Pins
15	GA8046	-	Dust Plug (Black)
	GA9978	-	Dust Plug (Blue)
16	G1K322	-	4-Pin Connector Kit W/Male Housing, (4) Female Socket Contacts and (1) Cable Clamp
17	---	-	Included In Planter Wiring Harness, See Item 2, on page P79
18	GA8021	-	Planter Harness W/Dust Caps, 4 Row (7 Connectors)
	GA8022	-	Planter Harness W/Dust Caps, 6 Row (9 Connectors) (6 Row Mechanical)
	GA7850	-	Planter Harness W/Dust Caps, 8 Row (12 Connectors) (6 Row Vacuum, 8 Row Mechanical/Vacuum)
	GB1090	-	Dust Cap (Included W/GA8021, GA8022, and GA7850)
19	G10745401	-	Seed Tube W/Computerized Sensor
	GA20902	-	Seed Tube (With Holes For Sensor Installation) (Included W/GA21515)
20	GA7859	1	Magnetic Distance Sensor Adapter (Analog To Digital)
21	G8647X	1	KPM III Backlit Console W/Brush (Item 23), Dust Plug (Item 15), Console Mounting Bracket Hardware and Power Harness
	GA12403	-	Mounting Bracket Assembly, Includes: (2) Mounting Brackets, (2) Connector Halves, (1) Compression Spring, (1) Tension Knob, (1) 1/4"-20 x 1 1/4" Hex Head Cap Screw, (1) 1/4" Plastic Washer, (1) 1/4" Steel Washer
	GR1762	-	Console Mounting Bracket Hardware Package, Includes: (3) No. 10-32 x 5/8" Hex Socket Pan Head Plated Screw, (3) 1/4" Plated Lock Washers (Included W/G8647X)
	GA16082	-	Power Harness (Included W/G8647X)
22	GA8047	-	Dust Plug (Black)
	GA9979	-	Dust Plug (Blue)
23	GR0594	-	Brush
24	GR0586	1	Radar Y-Cable (Used To Connect Radar Distance Sensor For Multiple
25	GA7857	-	Adapter Harness, 1'
26	GA7854	-	Extension Harness W/Dust Cap, 15'
	GA7855	-	Extension Harness W/Dust Cap, 30'
	GB1090	-	Dust Cap (Included W/GA7854 and GA7855)
27	GA7853	-	Junction Y-Harness W/Dust Cap
	GB1090	-	Dust Cap (Included W/GA7853)
28	G1K321	-	2-Pin Female Connector Kit (Black), Includes: (3) 2-Pin Female Housings, (6) Pin Contacts, (6) Seals
29	G1K320	-	2-Pin Male Connector Kit (Black), Includes: (3) 2-Pin Male Housings, (6) Socket Contacts, (6) Seals

ITEM	PART NO.	QTY.	DESCRIPTION
30	G1K248	-	3-Pin Female Connector Kit (Black), Includes: (3) 3-Pin Female Housings, (9) Pin Contacts, (9) Seals
	G1K362	-	3-Pin Female Connector Kit (Blue), Includes: (3) 3-Pin Female Housings, (9) Pin Contacts, (9) Seals
31	G1K252	-	3-Pin Male Connector Kit (Black), Includes: (3) 3-Pin Male Housings, (9) Pin Contacts, (9) Seals
	G1K363	-	3-Pin Male Connector Kit (Blue), Includes: (3) 3-Pin Male Housings, (9) Pin Contacts, (9) Seals
32	GD11089	-	Sealing Plug
33	G10229401	2	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x 8-1/2"
	G11387	1	Flat Washer, $\frac{3}{8}$ "
	G10108	2	Lock Nut, $\frac{3}{8}$ "-16
34	GD18118	2	Shaft Sensor Mount
35	GR1415	1	Rotation Sensor
36	GR1414	1	Actuator
37	GD18168	2	Mount
38	G11960	2	Philips Pan Head Machine Screw #8-32 x 1-1/4"
	G11961	2	Flat Washer #8
	G11202	2	Lock Nut W/Nylon Insert, No. 8-32, Stainless Steel
39	GD11474	2	Cover
40	G11202	2	Lock Nut W/Nylon Insert, No. 8-32, Stainless Steel
	G11960	2	Philips Pan Head Machine Screw #8-32 x 1-1/4"
A	GA6147	-	Magnetic Distance Sensor and Mounting Package (Items 4-9)
B	GR1763	-	KPM III Loaner (Display Only)
C	GA13521	-	Shaft Sensor Mounting Pkg. (Items 33, 34, and 37-40)
D	GA13522	-	Shaft Rotation Sensor (1 Sensor, 1 Actuator) (Items 35 and 36)


This page left blank intentionally.

FOC007(PT25e/FRTZ208)

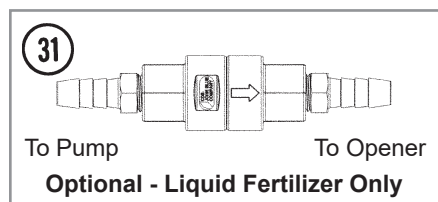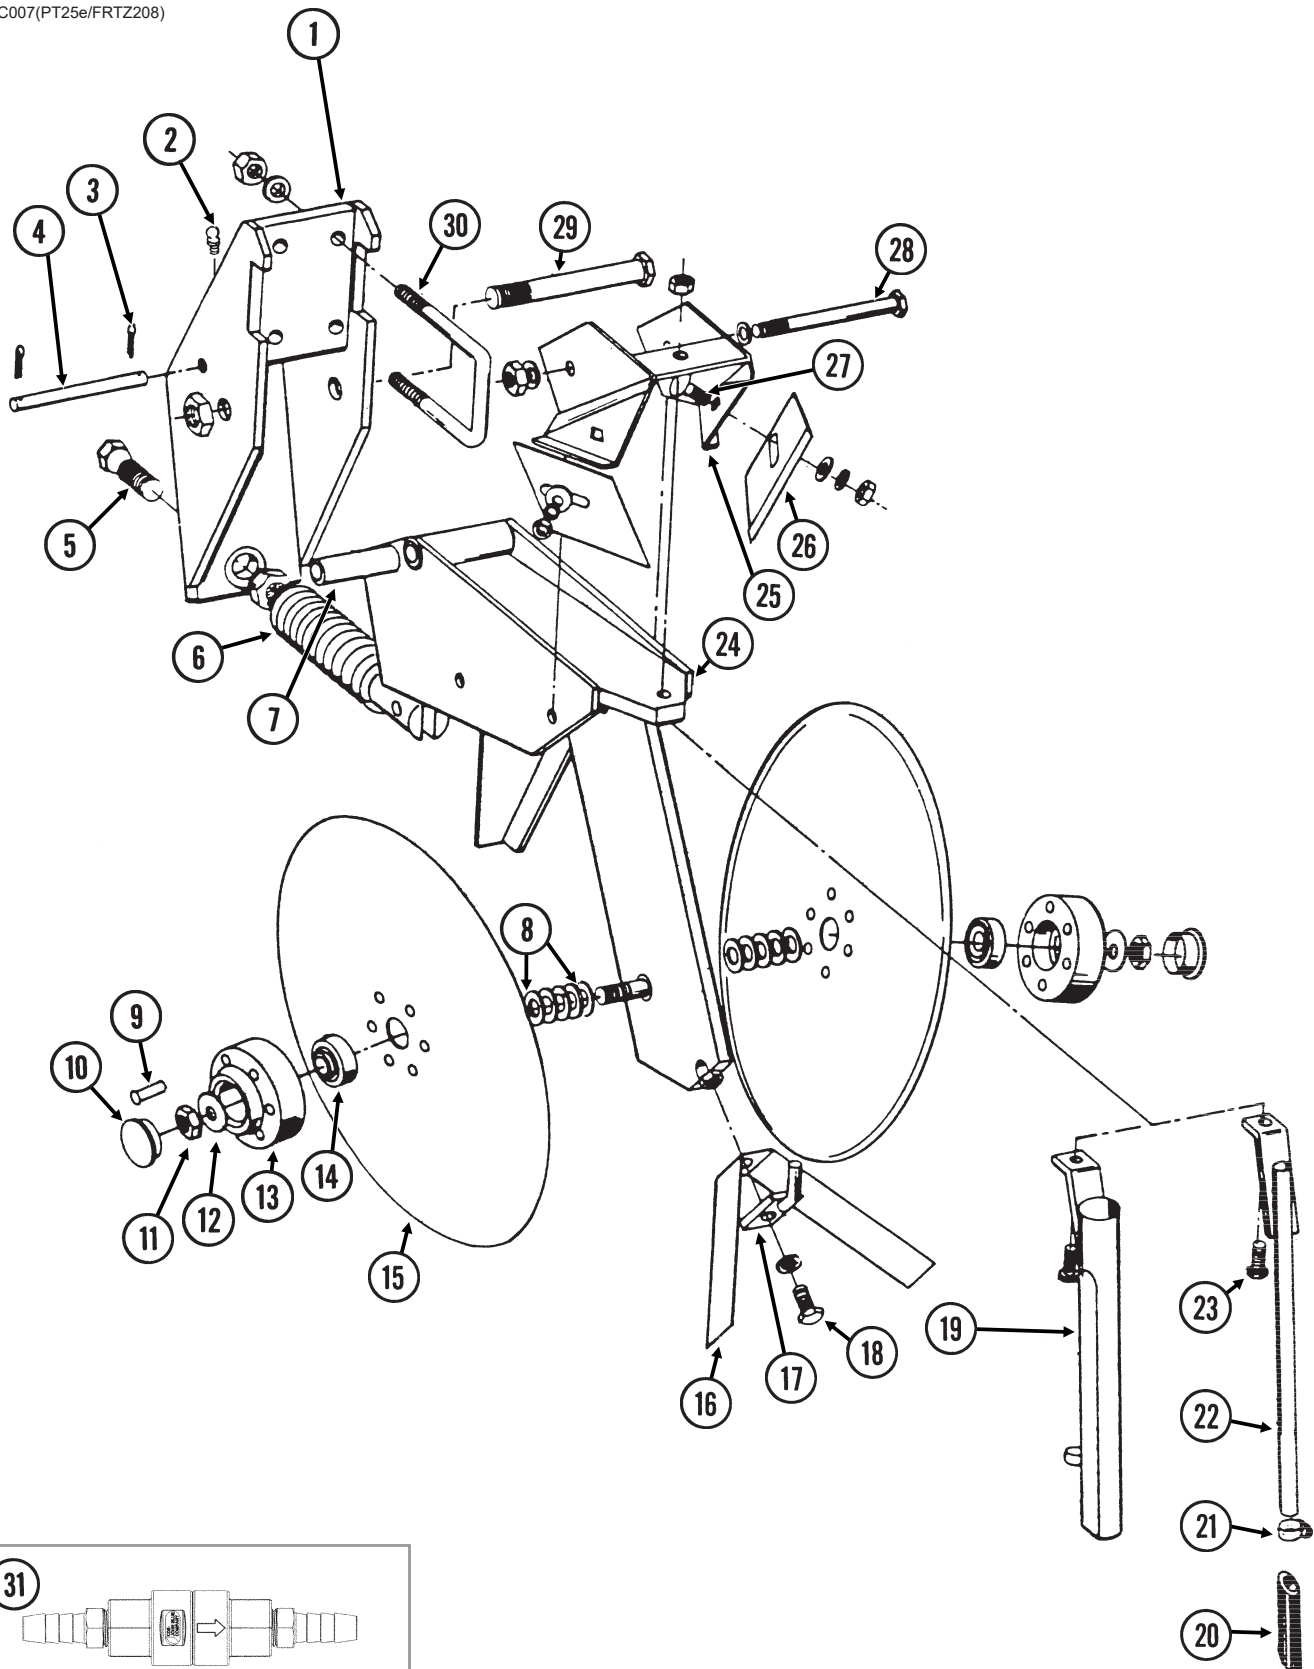

ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	GA8483	1	Bracket
2	G10938	1	Grease Fitting, 1/4"-28, Taper Threads
3	G10451	2	Cotter Pin, 1/8" x 1"
4	GD1657	1	Lockup Pin
5	GD0962	1	Hex Head Adjusting Bolt, 5/8"-18 x 3 1/4"
	G10499	1	Hex Jam Nut, 5/8"-18, Grade 2
6	GA0328	1	Spring
7	GD0487	1	Bushing, 4 1/4" I.D. x 3 1/2" Long
8	GD30725	-	Machine Bushing, 5/8" (.030" Thick)
9	G10542	12	Rivet, 1/4" x 1 5/16"
10	GD1132	2	Dust Cap
11	G10503	1	Hex Jam Nut, 5/8"-11, Grade 2
	G10504	1	Hex Jam Nut, 5/8"-11, L.H. Thread, Grade 2
12	G10397801	2	Bushing, 1 x .656 x 1
13	GB0134	2	Hub
14	GA2014	2	Bearing
15	GD11306	2	Disc Blade, 3.5 mm x 15"
16	GD2589	1	Inner Scraper
17	GA0312	1	Mount
18	G10019	1	Hex Head Cap Screw, 5/16"-18 x 1"
	G10232	1	Lock Washer, 5/16"
19	GA1369	-	Drop Tube, Dry Fertilizer
20	GD11705	-	Extension
21	G10681	-	Hose Clamp, No. 6
22	GA8685	-	Drop Tube, Liquid Fertilizer
23	G10133	1	Hex Head Cap Screw, 5/16"-18 x 1 1/2"
	G11386	1	Flat Washer, 5/16" SAE
	G10109	1	Lock Nut, 5/16"-18, Grade 8
24	GA9195	1	Shank
25	GA0810	1	Scraper Mount
26	GD1673	2	Scraper
27	G10305	2	Carriage Bolt, 3/8"-16 x 1"
	G11387	2	Flat Washer, 3/8" SAE
	G10229	2	Lock Washer, 3/8"
	G10101	2	Hex Nut, 3/8"-16
28	G10045	1	Hex Head Cap Screw, 1/2"-13 x 4 1/2"
	G10111	1	Lock Nut, 1/2"-13
29	G10046	1	Hex Head Cap Screw, 5/8"-11 x 5"
	G10107	1	Lock Nut, 5/8"-11
30	GD1138	2	U-Bolt, 2 1/2" x 2 1/2" x 1/2"-13
	G10228	4	Lock Washer, 1/2"
	G10102	4	Hex Nut, 1/2"-13
31	GA15416	1	Check Valve Assembly
	GA15415	1	Check Valve (Included W/GA15416)
	G11436	2	Hose Barb, 1/4" Male NPT To 3/8" Barb (Included W/GA15416)
A	GA8845	-	Disc Blade and Bearing Assembly (Items 9 and 13-15)

FOC016/FOC007/FOC019(PT27c/FRTZ208)


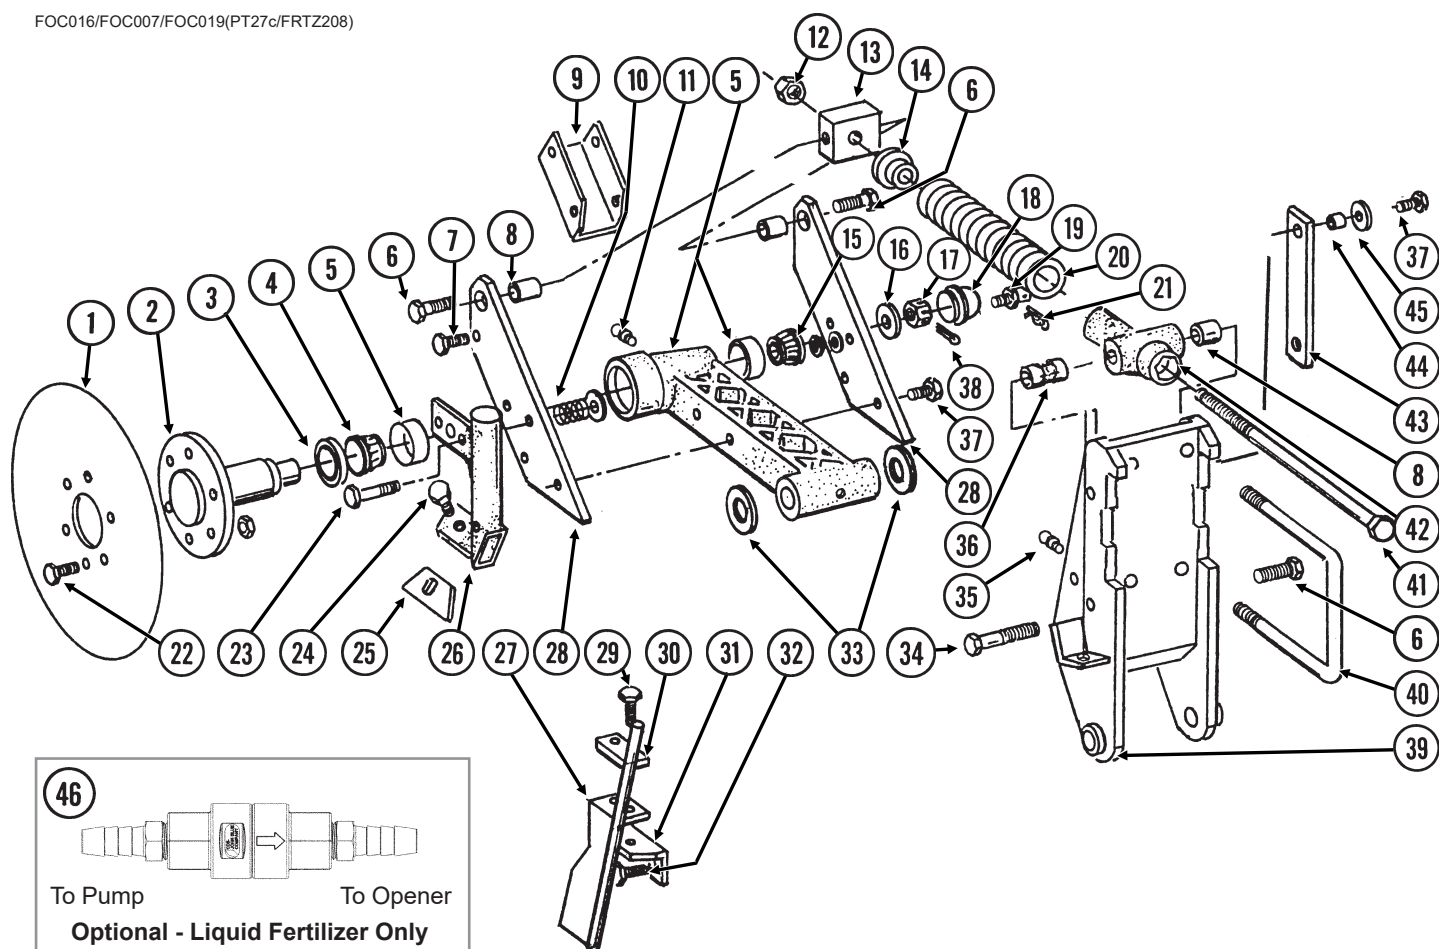


ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	GD7900	1	Disc Blade, 18"
	GD8247	-	Disc Blade, 20" (Optional)
2	GB0205	1	Spindle
3	GA4286	1	Seal
4	GA4287	1	Bearing
5	GA5887	1	Arm W/Cups and Washers
	GD6553	-	Inner Cup (Included W/GA5887)
	GR0188	-	Outer Cup (Included W/GA5887)
	G11391	3	Flat Washer, 5/8" SAE (Included W/GA5887)
6	G10007	3	Hex Head Cap Screw, 5/8"-11 x 1 1/2"
7	G10001	2	Hex Head Cap Screw, 3/8"-16 x 1"
	G10108	2	Lock Nut, 3/8"-16
8	GB0218	3	Bushing, 2 1/32" I.D. x 7/8" O.D. x 1 9/32" Long
9	GD8238	1	Channel
10	GD7962	2	Spring
11	G10641	2	Grease Fitting, 1/8" NPT
12	G10105	3	Hex Nut, 3/4"-10
13	GD7908	1	Tap Block
14	GD34923	1	Spring Seat
15	GA0237	1	Bearing
16	G10220	1	Machine Bushing, 1 1/16", 10 Gauge

ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
17	G10507	1	Slotted Nut, 1"-14
18	GD1104	1	Dust Cap
19	GD8276	1	Pin
	G10237	1	Lock Washer, 7/16"
	G10100	1	Hex Nut, 7/16"-14
20	GD10273	1	Compression Spring
21	G10592	1	Hair Pin Clip, No. 11
22	G10594	6	Bolt, 1/2"-13 x 1 1/2"
	G10111	6	Lock Nut, 1/2"-13
23	G10049	2	Hex Head Cap Screw, 3/8"-16 x 2 1/2"
	G11387	2	Flat Washer, 3/8" SAE
	G10108	2	Lock Nut, 3/8"-16
24	G10599	1	Carriage Bolt, 3/8"-16 x 1 1/4"
	G11387	1	Flat Washer, 3/8" SAE
	G10229	1	Lock Washer, 3/8"
	G10101	1	Hex Nut, 3/8"-16
25	GD7912	1	Scraper
26	GB0210	-	Drop Tube, R.H., Dry Fertilizer
	GB0209	1	Drop Tube, L.H., Dry Fertilizer (Shown)
27	GA8689	1	Drop Tube, L.H., Liquid Fertilizer (Shown)
	GA8688	-	Drop Tube, R.H., Liquid Fertilizer
28	GD8224	2	Bar
29	G10004	2	Hex Head Cap Screw, 3/8"-16 x 1 1/4"
	G10229	2	Lock Washer, 3/8"
30	GD10487	1	Clamp
31	GD10304	-	Angle, R.H.
	GD10303	1	Angle, L.H. (Shown)
32	G10016	2	Hex Head Cap Screw, 1/2"-13 x 2"
	G10111	2	Lock Nut, 1/2"-13
33	G10322	-	Machine Bushing, 1 1/4", 18 Gauge (As Required)
34	G10862	1	Hex Head Cap Screw, 5/8"-11 x 3 1/4"
	G11391	2	Flat Washer, 5/8" SAE
	G10230	1	Lock Washer, 5/8"
35	G10640	1	Grease Fitting, 1/4"-28
36	GD10242	1	Bushing, 2 1/4"
37	G10039	5	Hex Head Cap Screw, 1/2"-13 x 1 3/4"
	G10111	5	Lock Nut, 1/2"-13
38	G10459	1	Cotter Pin, 3/16" x 1 1/2"
39	GA7240	-	Opener Mount, R.H.
	GA7239	1	Opener Mount, L.H. (Shown)
40	GD1114	2	U-Bolt, 7" x 7" x 5/8"-11 (8 1/2" Long)
	GD14559	-	U-Bolt, 7" x 7" x 5/8"-11 (9" Long)
	G10230	4	Lock Washer, 5/8"
	G10104	4	Hex Nut, 5/8"-11
41	GD7907	1	Special Bolt
42	GB0206	1	Rod Guide
43	GD8239	1	Storage Strap
44	GD7904-02	1	Sleeve, 1/2" x 1/2" Long
45	G11389	3	Flat Washer, 1/2" SAE
46	GA15416	-	Check Valve, Low Rate
	GA15415	1	Check Valve (Included W/GA15416)
	G11436	2	Hose Barb, 1/4" Male NPT To 3/8" Barb (Included W/GA15416)


(FRTZ268b/A15416)

NOTE: R.H. and L.H. is determined by which side of blade it is on in the direction of travel.

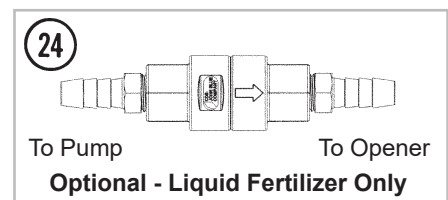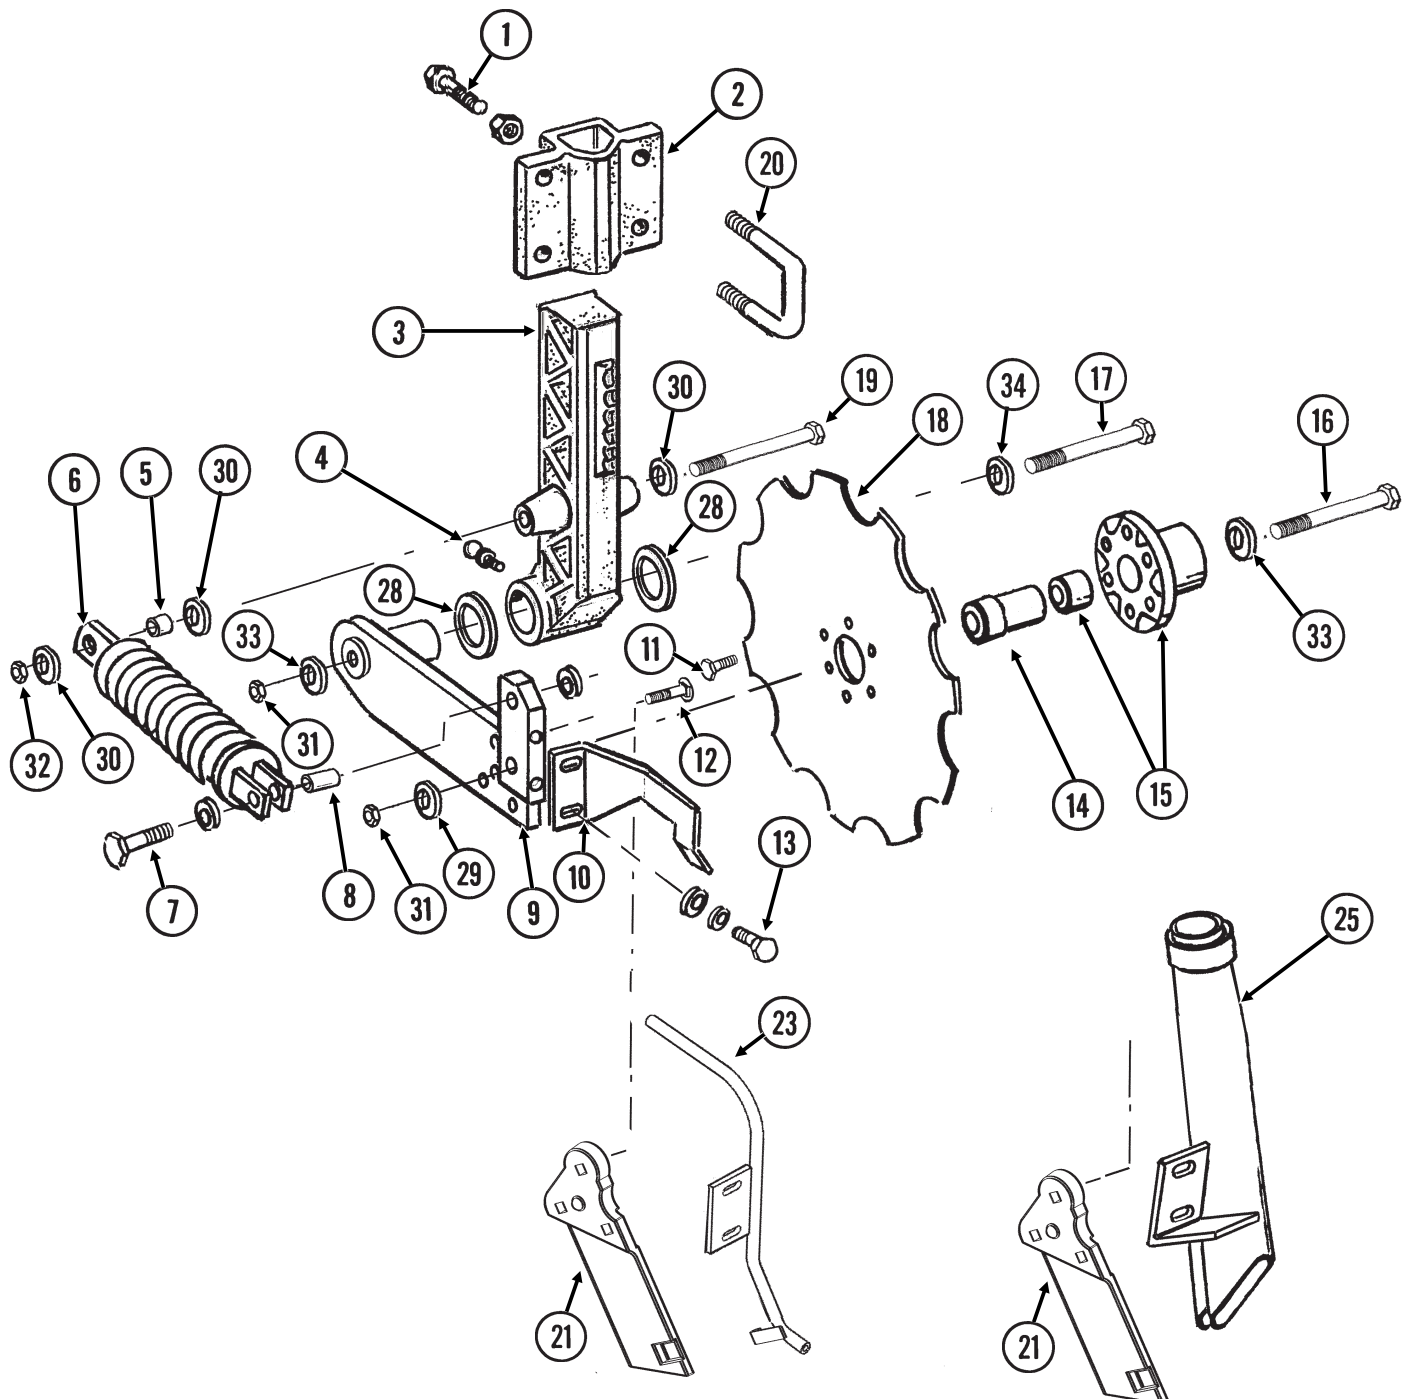

ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	G10017	3	Hex Head Cap Screw, 1/2"-13 x 1 1/2"
	G10102	3	Hex Nut, 1/2"-13
2	GB0400	1	Mount, R.H.
	GB0405		Mount, L.H. (Shown)
3	GB0296	1	Arm, 13 1/2"
4	G10640	1	Grease Fitting, 1/4"-28
5	GD12685	1	Bushing, 3/4" O.D. x 1/2" Long
6	GA6966	1	Compression Spring Assembly
7	G10047	1	Hex Head Cap Screw, 3/8"-16 x 1 3/4"
	G11387	2	Flat Washer, 3/8" SAE
	G10108	1	Lock Nut, 3/8"-16
8	GD1026	1	Sleeve, 1 1/16" Long
9	GA9433	1	Pivot Arm, L.H. (Shown)
	GA9434	-	Pivot Arm, R.H.
10	GD11557	1	Scraper, L.H. (Shown)
	GD11558	-	Scraper, R.H.
11	G10002	6	Hex Head Cap Screw, 3/8"-16 x 3/4"
12	G10306	3	Carriage Bolt, 3/8"-16 x 2"
	G10108	3	Lock Nut, 3/8"-16
13	G10991	2	Hex Head Cap Screw, 5/16"-18 x 7/8"
	G10232	2	Lock Washer, 5/16"
	G11386	6	Flat Washer, 5/16" SAE
14	GD12679	1	Stepped Spacer, 3" Long
15	GA9437	1	Hub W/Bearing
	GA8603	-	Bearing, Double Row
16	G10011	1	Hex Head Cap Screw, 5/8"-11 x 5 1/2"
17	G10046	1	Hex Head Cap Screw, 5/8"-11 x 5"
18	GD12676	1	Disc Blade, Notched, 16 3/4"
19	G10871	1	Hex Head Cap Screw, 1/2"-13 x 6"
20	GD13287	2	U-Bolt, 1 1/2" x 2 1/2" x 1/2"-13
	G11389	4	Flat Washer, 1/2" Plated SAE
	G10111	4	Lock Nut, 1/2"-13
21	GB0323	1	Knife, L.H. (Shown)
	GB0322	-	Knife, R.H.
22			
23	GA10047	1	Drop Tube, L.H., Dry Fertilizer
	GA10048	-	Drop Tube, R.H., Dry Fertilizer (Shown)
24	GA15416	1	Check Valve Assembly
	GA15415	1	Check Valve
	G11436	2	Hose Barb, 1/4" Male NPT To 3/8" Barb
25	GA10047	1	Drop Tube, L.H., Dry Fertilizer
	GA10048	-	Drop Tube, R.H., Dry Fertilizer (Shown)
26			
27			
28	G10450	-	Machine Bushing, 1 1/2", 18 Gauge (As Required)
29	GD12677	1	Washer, 1 1/2" O.D., 7 Gauge, Hardened
30	G11389	-	Flat Washer, 1/2" Plated SAE
31	G10107	-	Lock Nut, 5/8"-11
32	G10111	-	Lock Nut, 1/2"-13
33	G11391	-	Flat Washer, 5/8" SAE
34	G10217	-	Washer, 5/8" USS


DFC024(FRTZ165I)

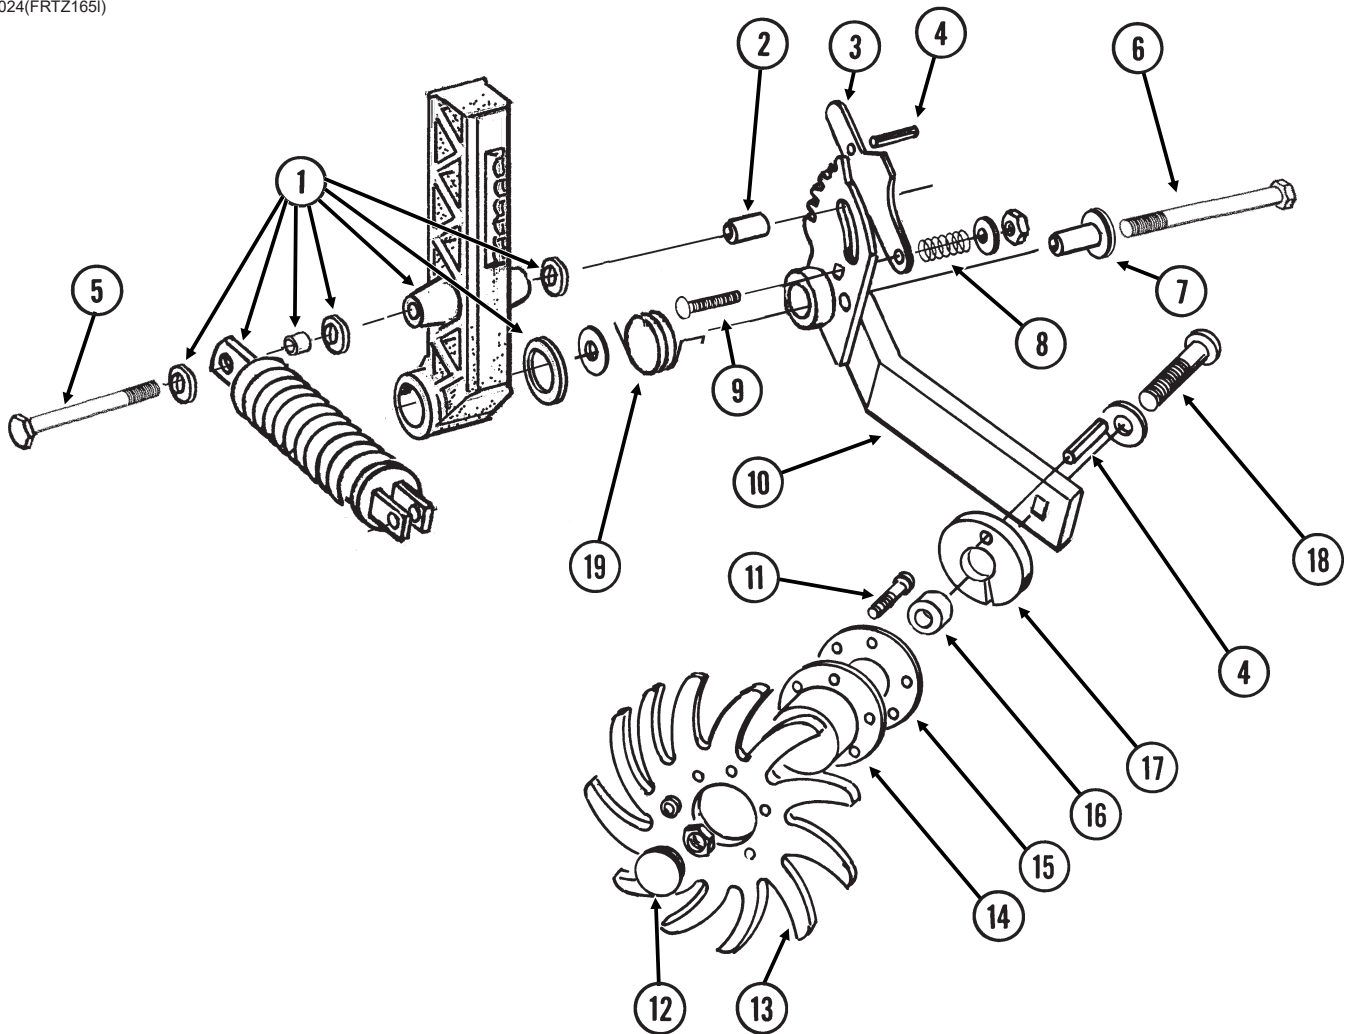

Residue Wheel Attachment for Notched Single Disc Fertilizer Opener


ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	---	-	See "Notched Single Disc Fertilizer Opener" on page P88
2	GD12684	1	Bushing, 1 $\frac{1}{3}$ " Long
3	GD11178	1	Adjustment Lever
4	G10603	2	Spring Pin, $\frac{1}{4}$ " x 1 $\frac{1}{4}$ "
5	G11034	1	Hex Head Cap Screw, $\frac{1}{2}$ "-13 x 7"
	G10111	1	Lock Nut, $\frac{1}{2}$ "-13
6	G10830	1	Hex Head Cap Screw, $\frac{5}{8}$ "-11 x 7 $\frac{1}{2}$ "
	G11391	1	Flat Washer, $\frac{5}{8}$ " SAE
	G10107	1	Lock Nut, $\frac{5}{8}$ "-11
7	GD11836	1	Sleeve, 2 $\frac{1}{8}$ " Long
8	GD7962	1	Spring
9	G10306	1	Carriage Bolt, $\frac{3}{8}$ "-16 x 2"
	G11387	1	Flat Washer, $\frac{3}{8}$ " SAE
	G10108	1	Lock Nut, $\frac{3}{8}$ "-16
10	GA7999	1	Mount W/Grease Fitting, L.H. (Shown)
	GA7998	-	Mount W/Grease Fitting, R.H.
	G10640	-	Grease Fitting, $\frac{1}{4}$ "-28 (Included W/GA7999 and GA7998)
11	G10133	6	Hex Head Cap Screw, $\frac{5}{16}$ "-18 x 1 $\frac{1}{2}$ "
	G10109	6	Lock Nut, $\frac{5}{16}$ "-18, Grade 8
12	GD1132	2	Dust Cap
13	GD10552	2	Wheel, 12 Tine, $\frac{3}{8}$ " x 12"
14	GA5654	1	Hub W/Bearings
	GA2014	-	Bearing (Included W/GA5654)
15	GD9724	1	Backing Plate
16	GD7817-04	1	Spacer, $\frac{1}{16}$ " I.D. x $\frac{1}{2}$ " Long
17	GD11188	1	Spacer
18	G10908	1	Carriage Bolt, $\frac{5}{8}$ "-11 x 3"
	G10503	1	Hex Jam Nut, $\frac{5}{8}$ "-11, Grade 2
19	GD11265	1	Spring, L.H. (Shown)
	GD11266	-	Spring, R.H.
A	GA7445	-	Wheel Assembly, 12 Tine, L.H. (Items 11 and 13-15)(Shown)
	GA7446	-	Wheel Assembly, 12 Tine, R.H. (Items 11 and 13-15)

(FRTZ256)

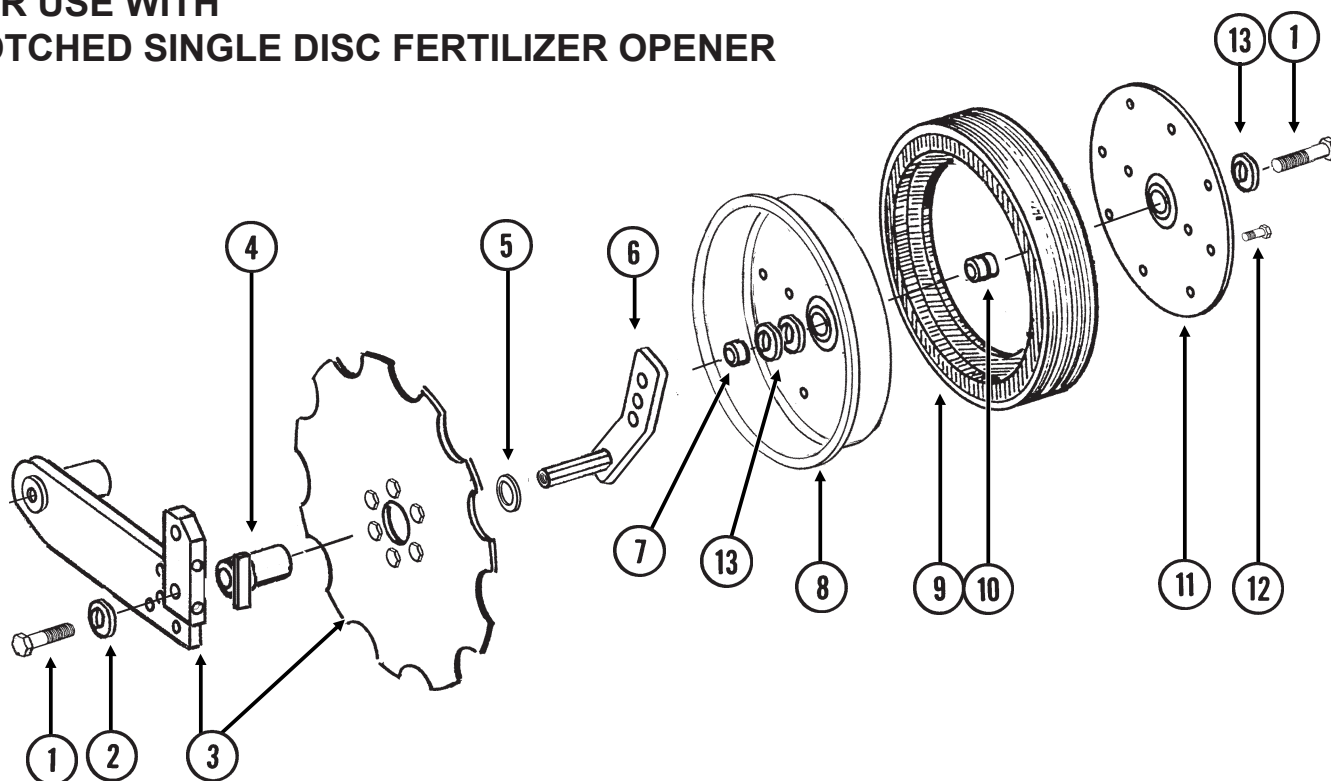**FOR USE WITH
NOTCHED SINGLE DISC FERTILIZER OPENER**

ITEM	PART NO.	QTY. (Per Assy.)	DESCRIPTION
1	G10010	2	Hex Head Cap Screw, 5/8"-11 x 3"
2	G11391	1	Flat Washer, 5/8" SAE
3	---	-	See "Notched Single Disc Fertilizer Opener" on page P88
4	GA9472	1	Blade Mount
5	G10233	1	Machine Bushing, 1", 10 Gauge
6	GA10037	1	Wheel Mount, L.H. (Shown)
	GA10036	1	Wheel Mount, R.H.
7	GD13309	1	Spacer
8	GD11423	1	Half Wheel
9	GD11953	1	Offset Tire
10	GA6171	1	Bearing
11	GD11954	1	Half Wheel Cover, Nylon
12	G10961	11	Flanged Whiz Lock Screw, 5/16"-18 x 3/4", No Serration
	G10620	11	Serrated Flange Nut, 5/16"-18
13	G10397801	-	Bushing, 1 x .656 x 1 (As Required)
A	GA8877	-	Gauge Wheel Complete (Items 8-12)


FOC008(PT28)

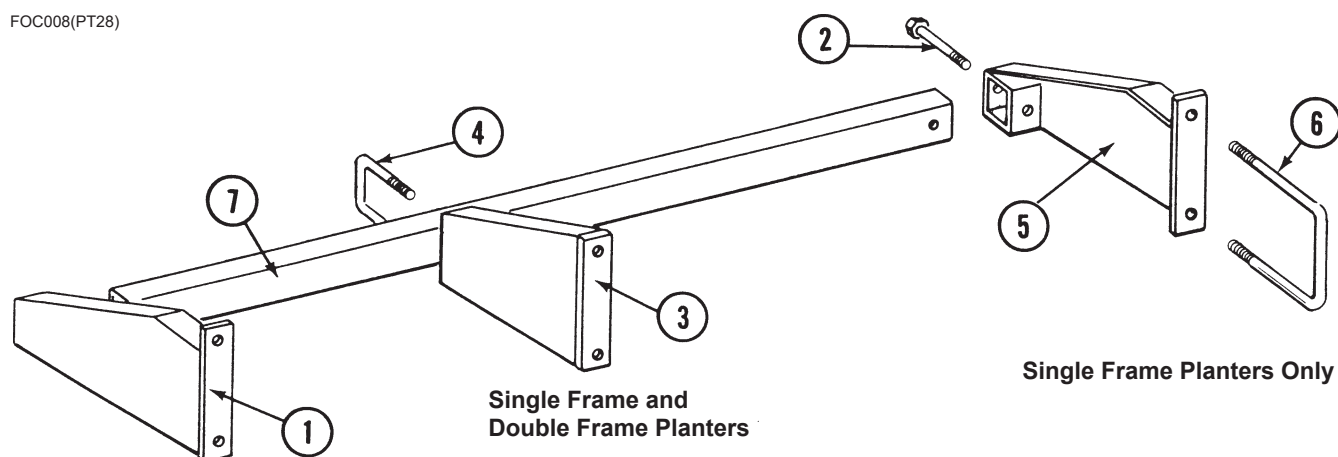

Single Frame Planters Only


ITEM	PART NO.	QTY.	DESCRIPTION
1	GA5231	1	Support, L.H., Single Frame Planters Only
2	G10035	2	Hex Head Cap Screw, 1/2"-13 x 4"
	G10228	2	Lock Washer, 1/2"
	G10102	2	Hex Nut, 1/2"-13
3	GA5237	1	Support, 19" Long, L.H. (Shown), 8 Row Single Frame Planters
	GA5236	1	Support, 19" Long, R.H., 8 Row Single Frame Planters
	GA9431	1	Support, 18 1/8" Long, L.H., 8 Row Double Frame Planters
	GA9430	1	Support, 18 1/8" Long, R.H., 8 Row Double Frame Planters
4	GD1138	2	U-Bolt, 2 1/2" x 2 1/2" x 1/2"-13
	G10228	4	Lock Washer, 1/2"
	G10102	4	Hex Nut, 1/2"-13
5	GA5230	1	Support, R.H., Single Frame Planters Only
6	GD1114	2	U-Bolt, 7" x 7" x 5/8"-11
	G10230	4	Lock Washer, 5/8"
	G10104	4	Hex Nut, 5/8"-11
7	GD1685-13	1	Toolbar, 2 1/2" x 2 1/2" x 165", 6 Row
	GD1685-16	-	Toolbar, 2 1/2" x 2 1/2" x 225", 8 Row
A	G6795X	-	Support Bundle (Items 1, 2, 4, 5 and 6)

(PT29f)

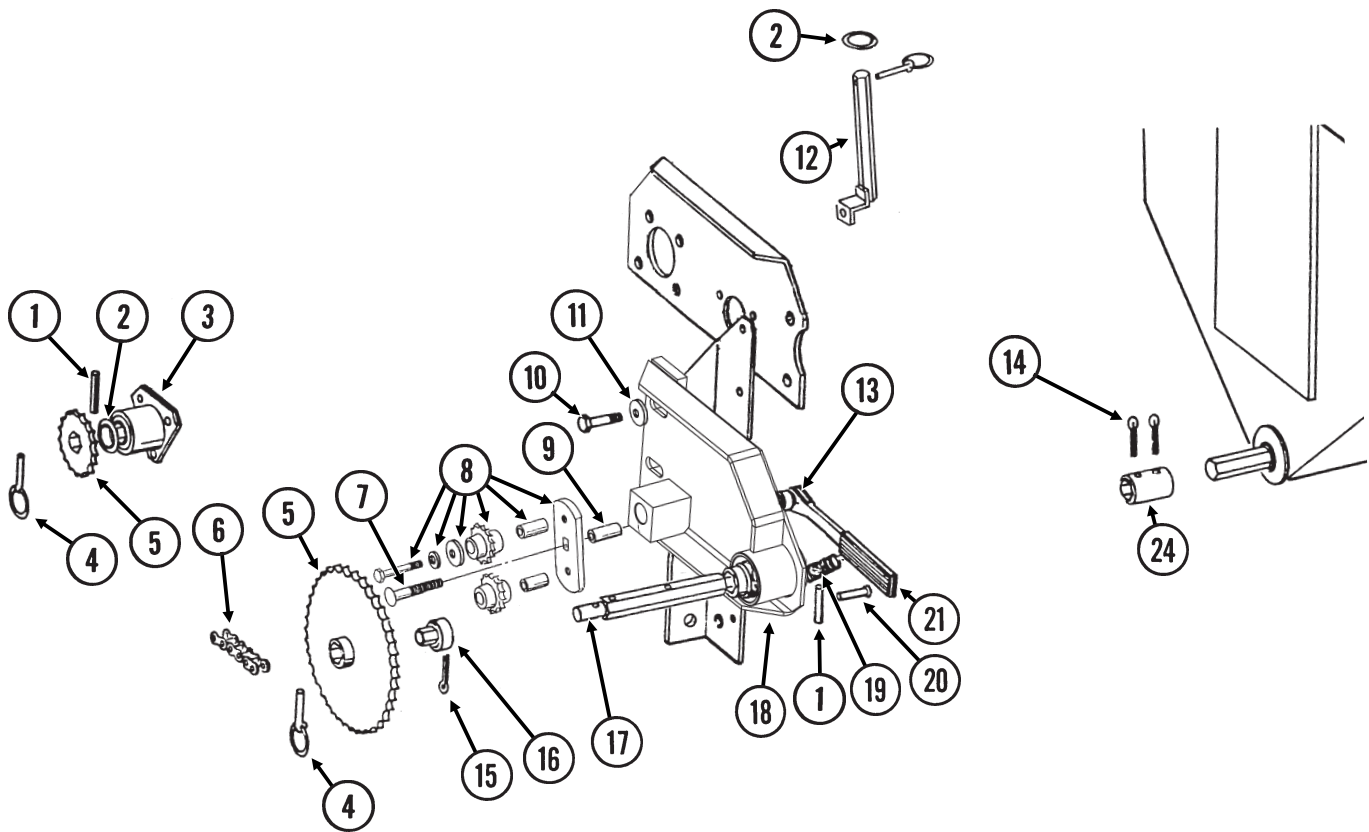

ITEM	PART NO.	QTY.	DESCRIPTION
1	G10602	2	Spring Pin, ¼" x 1½"
2	G10233	2	Machine Bushing, 1", 10 Gauge
3	GA5223	1	Spacer W/Bearing
	GA5116	-	Bearing, ⅞" Hex Bore, Cylindrical (Included W/GA5116)
4	GD2558	3	Lynch Pin, ¼"
5	GA5105	1	Sprocket, 15 Tooth
	GA5107	1	Sprocket, 19 Tooth
	GA5114	1	Sprocket, 30 Tooth
	GA5115	1	Sprocket, 33 Tooth
	GA6337	1	Sprocket, 35 Tooth
6	G3310-98	1	Chain, No. 40, 98 Pitch Including Connector Link
	GR0912	-	Connector Link, No. 40
7	G10419	1	Carriage Bolt, ½"-13 x 4½"
	G10111	1	Lock Nut, ½"-13
8	GA7336	1	Idler W/Bolt-On Sprockets
	GD7426	-	Sprocket, 12 Tooth (Included W/GA7336)
	GD1026	-	Sleeve, 1⅜" Long (Included W/GA7336)
	G11387	-	Flat Washer, ⅜" SAE (Included W/GA7336)
	G10229	-	Lock Washer, ⅜" (Included W/GA7336)
	G10047	-	Hex Head Cap Screw, ⅜"-16 x 1¾" (Included W/GA7336)
9	GD3180-17	1	Sleeve, ⅝" I.D. x ⅞" O.D. x 2⅝" Long
10	G10053	2	Hex Head Cap Screw, ½"-13 x 2½"
	G10585	1	Hex Head Cap Screw, ½"-13 x 3¼"
	G10033	1	Hex Head Cap Screw, ½"-13 x 3½"
	G10016	2	Hex Head Cap Screw, ½"-13 x 2"
	G10228	2	Lock Washer, ½"
	G10102	2	Hex Nut, ½"-13
11	G11389	2	Flat Washer, ½" Plated SAE
12	GA7313	1	Sprocket Storage Rod
13	GD10161	1	Spacer, ⅜"
14	G10460	-	Cotter Pin, ¼" x 2"
15	G10821	1	Clevis Pin, ⅜" x 2"
	G10455	-	Cotter Pin, 1/16" x ½"
16	GD7127	1	Shear Coupler
17	GD7870	1	Shaft, 7"
18	GA21798	1	Plate W/Bearings and Grease Fitting
	GA5116	-	Bearing, ⅞" Hex Bore, Cylindrical (Included W/GA21798)
	GA5624	-	Special Bearing, ⅞" Hex Bore x 1.6" (Included W/GA21798)
	G10640	-	Grease Fitting, ¼"-28 (Included W/GA21798)
19	GD5857	1	Spring
20	G10408	1	Clevis Pin, ⅝" x ¾"
	G10409	1	Retaining Ring, ⅝"
21	GA4235	1	Ratchet Arm W/Protective Closure
	G10445	-	Protective Closure
22	---	-	---
23	---	-	---
24	GD5886	-	Coupler, 1¾"


DFC009/DFC014/DFC018(PT30a)

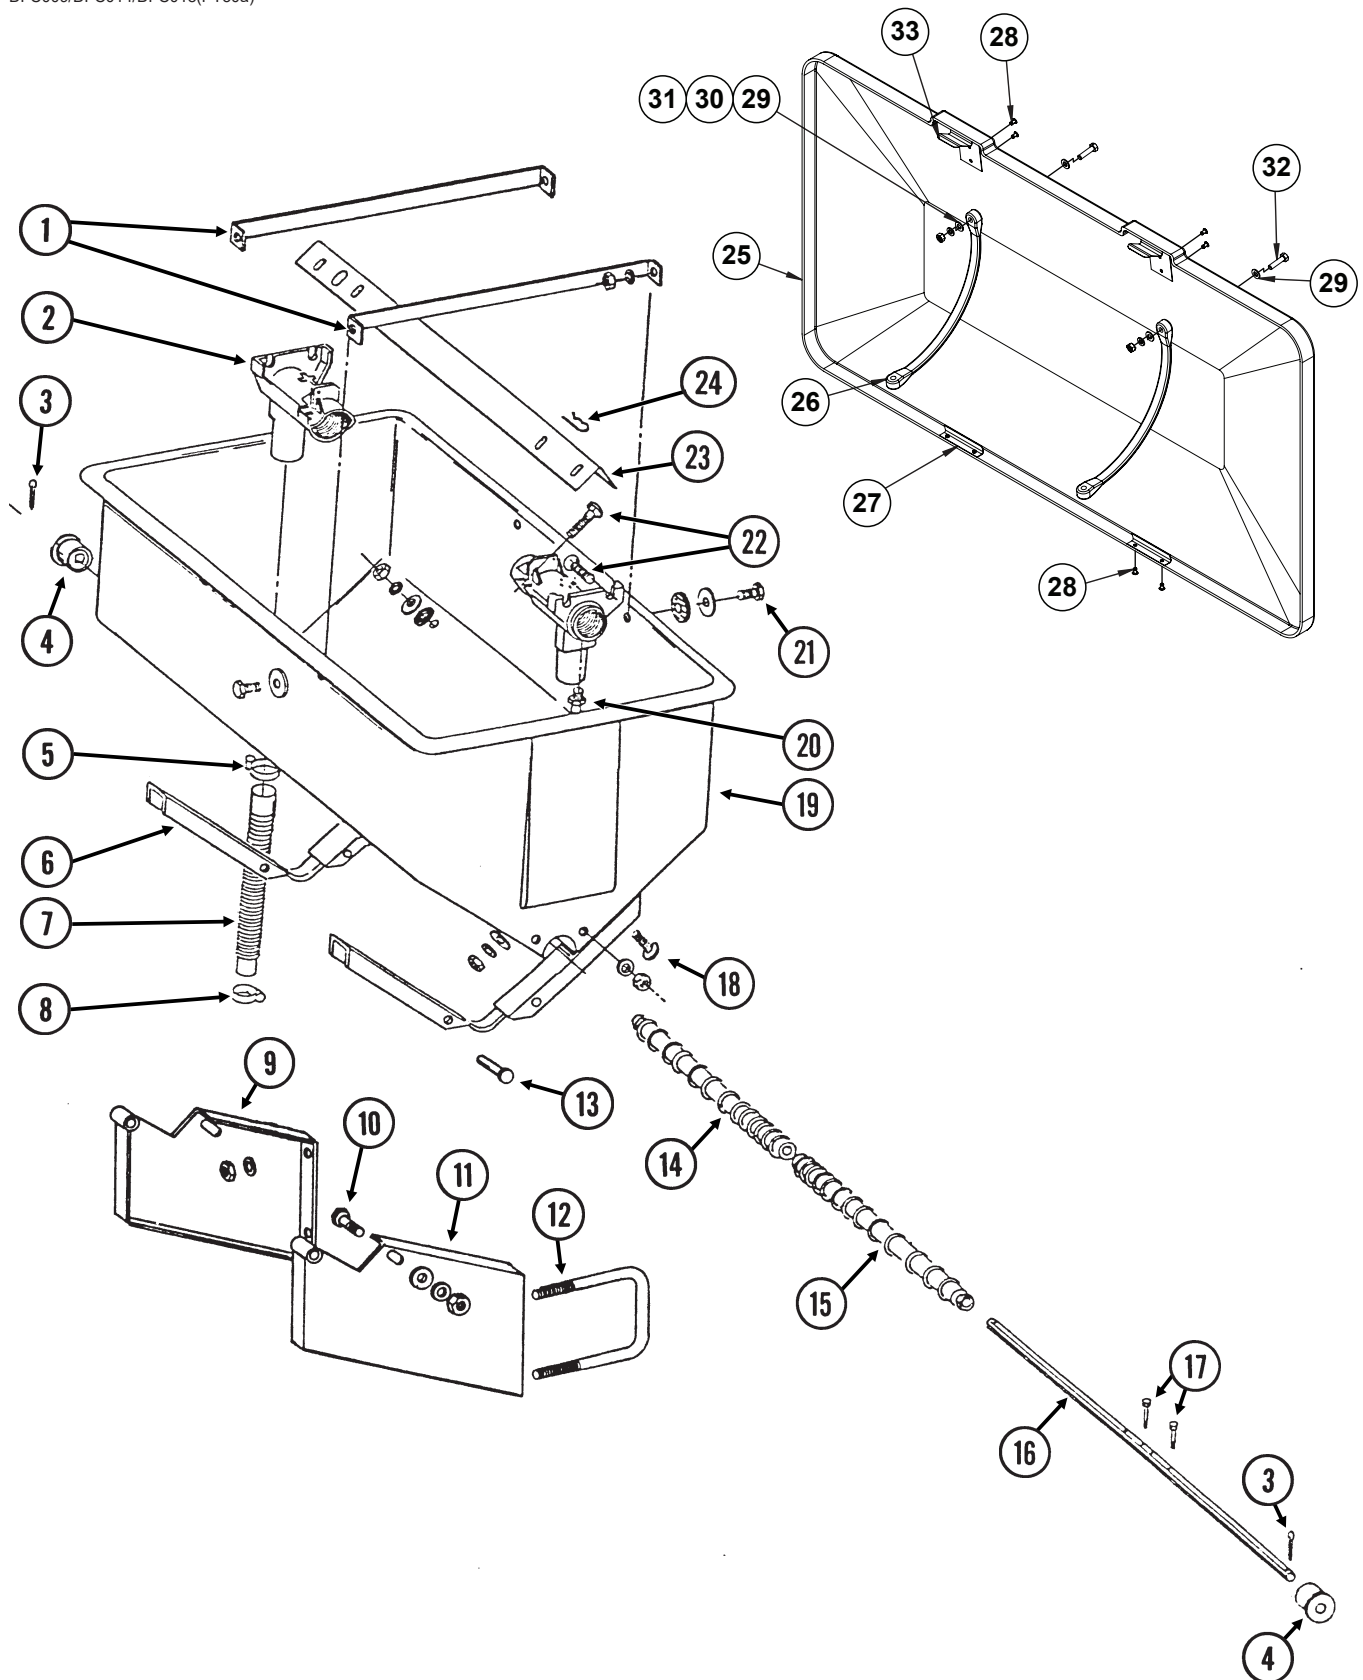

ITEM	PART NO.	QTY. (Per Hopper)	DESCRIPTION
1	GD1209	2	Strap
2	GD1200	2	Outlet Housing
3	G10460	2	Cotter Pin, 1/4" x 2"
4	GB0200	2	Bearing
5	G10676	2	Hose Clamp, No. 36, Stainless Steel
6	GA5652	2	Saddle
7	GD21398	2	Rubber Tube
8	G10672	2	Hose Clamp, No. 28
9	GA0864	1	Hopper Mount, R.H.
10	G10037	2	Hex Head Cap Screw, 1/2"-13 x 1 1/4"
	G11389	2	Flat Washer, 1/2" SAE
	G10228	2	Lock Washer, 1/2"
	G10102	2	Hex Nut, 1/2"-13
11	GA0863	1	Hopper Mount, L.H.
12	GD1114	2	U-Bolt, 7" x 7" x 5/8"-11
	G10177	-	Hex Head Cap Screw, 5/8"-11 x 9 1/2"
	G10230	4	Lock Washer, 5/8"
	G10104	4	Hex Nut, 5/8"-11
13	G10561	2	Clevis Pin, 1/2" x 3"
	G10451	2	Cotter Pin, 1/8" x 1"
14	GB0198	1	Auger, R.H.
15	GB0199	1	Auger, L.H.
16	GD7848	1	Shaft
17	G10587	2	Hex Head Cap Screw, 1/4"-20 x 2", Stainless Steel
	G10588	2	Hex Nut, 1/4"-20, Stainless Steel
18	G10303	8	Carriage Bolt, 5/16"-18 x 1"
	G10201	8	Special Washer, 3/8" x 1 1/2" O.D.
	GD1213	8	Rubber Washer
	G10232	8	Lock Washer, 5/16"
	G10106	8	Hex Nut, 5/16"-18
19	GD1379	1	Hopper
20	G10640	2	Grease Fitting, 1/4"-28
21	G10171	4	Hex Head Cap Screw, 5/16"-18 x 1 1/4"
	G10201	4	Special Washer, 3/8" x 1 1/2" O.D.
	GD1213	4	Rubber Washer
	G10232	4	Lock Washer, 5/16"
	G10106	4	Hex Nut, 5/16"-18
22	G10303	8	Carriage Bolt, 5/16"-18 x 1"
	G11386	8	Flat Washer, 5/16" SAE
	G10232	8	Lock Washer, 5/16"
	G10106	8	Hex Nut, 5/16"-18
23	GD1207	1	Baffle
24	G10670	2	Hair Pin Clip, No. 3
25	GD1654	1	Hopper Lid w/ Kinze Logo
26	GD1210	2	Rubber Strap
27	GD2412	2	Rear Retainer
28	G10655	8	Rivet, 3/16" x 13/32"
29	G11386	4	Flat Washer, 5/16" SAE
30	G10232	2	Lock Washer, 5/16"
31	G10106	2	Hex Nut, 5/16"-18
32	G10171	2	Hex Head Cap Screw, 5/16"-18 x 1 1/4"
33	GD1380	2	Front Clip
A	GA5666	-	Hopper Sub-Assembly (Items 2,6,18,19, 22 and 24)
B	GA5667	-	Hopper Hardware Box (Items 1, 3, 4, 14-17, 21, 23 and 26)
C	GA0898	-	Hopper Lid w/ Kinze Logo (Items 25-33)


RH101190(PT31/PT32/PT33/PT34/PT35)

6 Row

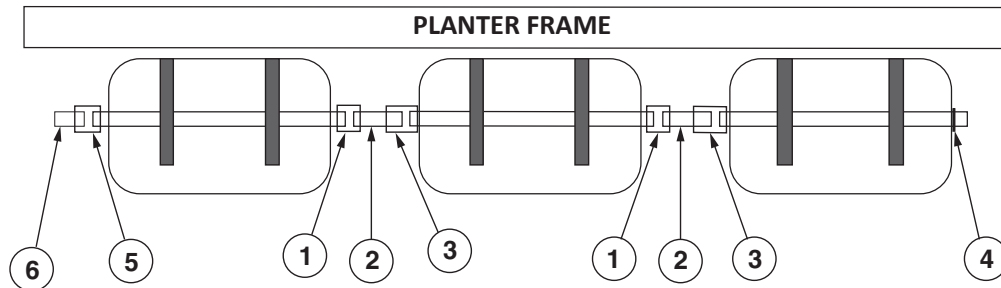




ITEM	PART NO.	QTY.	DESCRIPTION
1	GD5886	2	Coupler, 1 $\frac{3}{4}$ "
2	G10216501	2	Hex Shaft, $\frac{7}{8}$ " x 12"
3	GD7867	2	Coupler, 3"
4	G10233	2	Machine Bushing, 1", 10 Gauge
5	GD5961	1	Coupler, 2-1/4"
6	G10216502	1	Hex Shaft, $\frac{7}{8}$ " x 3.75"

8 Row

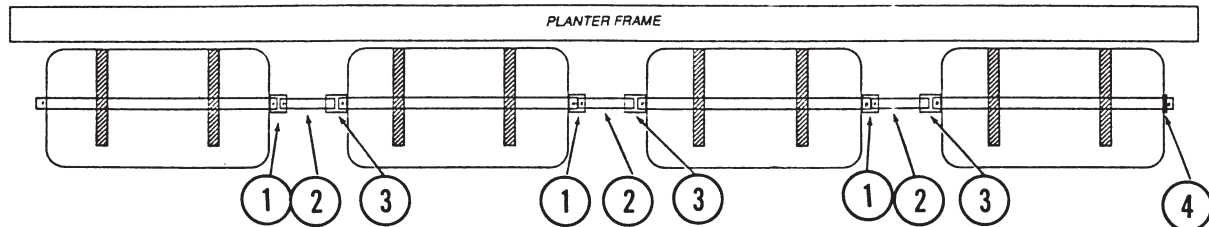



ITEM	PART NO.	QTY.	DESCRIPTION
1	GD5886	-	Coupler, 1 $\frac{3}{4}$ "
2	GD2548-15.5	-	Hex Shaft, $\frac{7}{8}$ " x 15 $\frac{1}{2}$ " (1 Hole)
3	GD7867	-	Coupler, 3"
4	G10233	2	Machine Bushing, 1", 10 Gauge

(11040301/A6121)

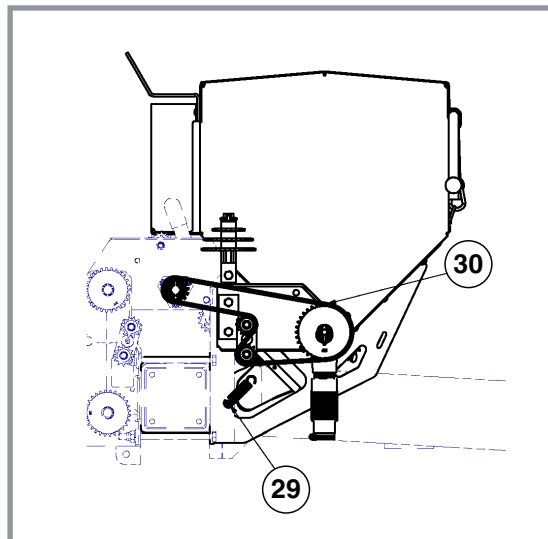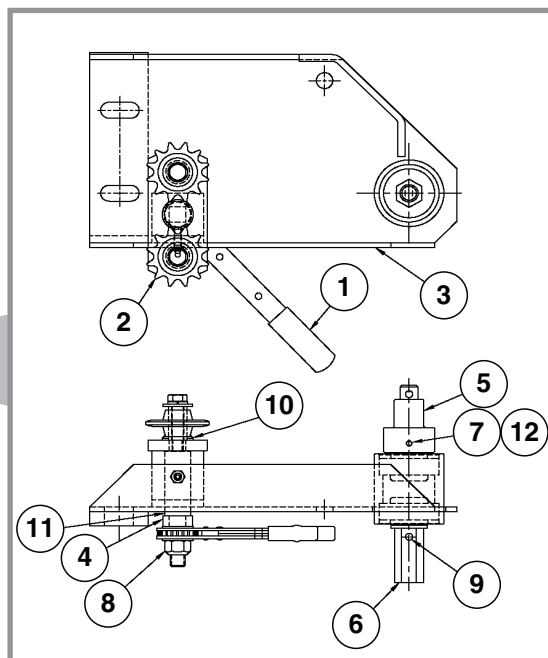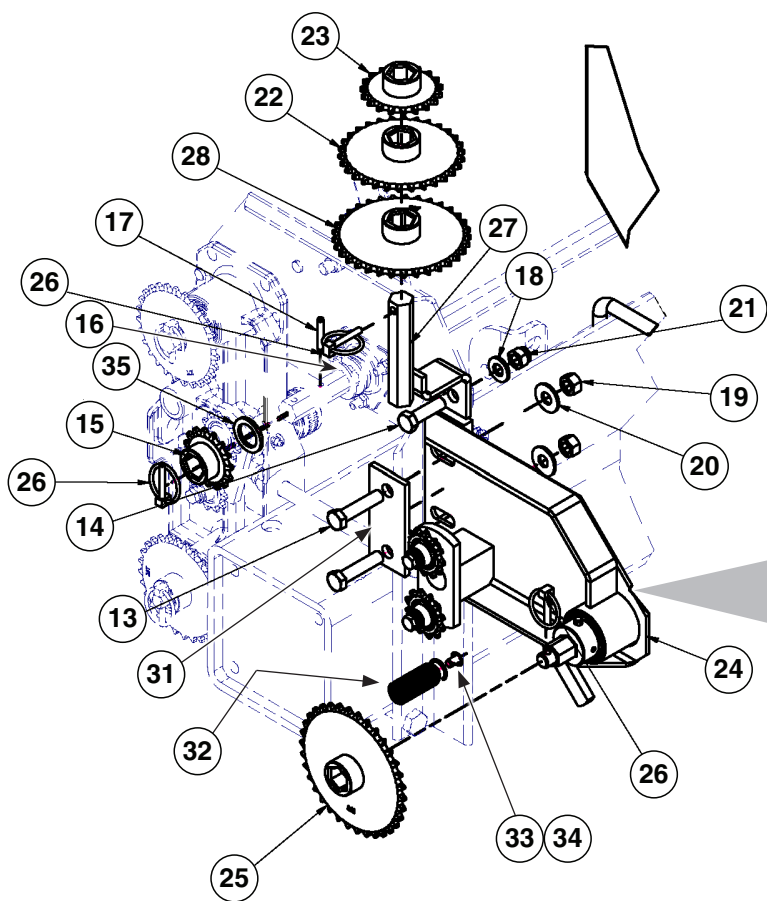


ITEM	PART NO.	QTY.	DESCRIPTION
1	GA4235	1	Ratchet Wrench Assembly
2	GA7336	1	Double Idler Sprocket
3	GA21798	1	Fertilizer Transmission Assembly
4	GD10161	1	Spacer Idler Sprocket
5	GD7127	1	Shear Coupler
6	GD7870	1	Hex Shaft
7	G10821	1	Clevis Pin, 3/16" x 2"
8	G10111	1	Hex Locknut, 1/2"-13
9	G10602	1	Spring Pin, 1/4" x 1-1/2"
10	G10419	1	Carriage Bolt, 1/2"-13 x 4-1/2"
11	GD3180-17	1	Sleeve, 7/8" O.D. x .635 I.D. x 2-5/16"
12	G10455	1	Cotter Pin, 1/16" x 1/2"
13	G10016	2	Hex Head Cap Screw, 1/2"-13 x 2"
14	G10017	1	Hex Head Cap Screw, 1/2" x 1-1/2"
15	GA5105	1	Sprocket No. 40, 15 Tooth
16	G10233	1	Bushing, 1-1/2" x 1-1/32" x 10
17	G10602	1	Spring Pin, 1/4" x 1 1/2"
18	G11389	1	Flat Washer, 1/2" Plated SAE
19	G10102	2	Hex Nut, 1/2" x 1-1/32"
20	G10216	2	Flat Washer, 1/2" USS
21	G10111	1	Hex Locknut, 1/2"-13
22	GA5114	1	Sprocket No. 40, 30 tooth
23	GA5107	1	Sprocket No. 40, 19 Tooth
24	GA6121	1	Fertilizer Transmission Assembly
25	GA6337	1	Sprocket No. 40, 35 Tooth
26	GD2558	3	Lynch Pin, 1/4"
27	GA7313	1	Sprocket Storage Rod
28	GA5115	1	Sprocket No. 40, 33 Tooth
29	G10408	1	Clevis Pin, 5/16" x 3/4"
30	G3310-98	1	Chain, No. 40, 98 Pitch, Including Connector Link
31	GD8246	1	Overlay Bar, 1/4" x 2-1/4" x 4-1/2"
32	GD5857	1	Spring
33	G10408	1	Clevis Pin, 5/16" x 3/4"
34	G10409	1	External Retaining Ring, M10
35	GA5223	1	Spacer Assembly

(11040401)

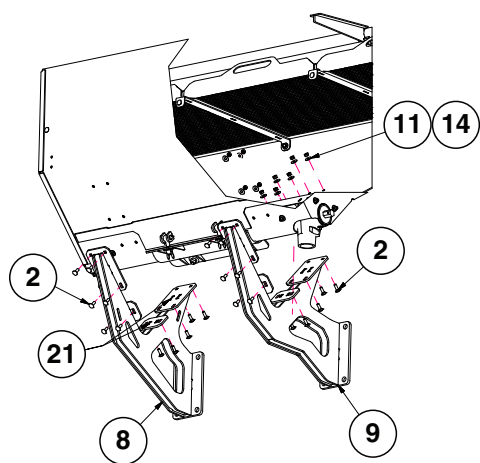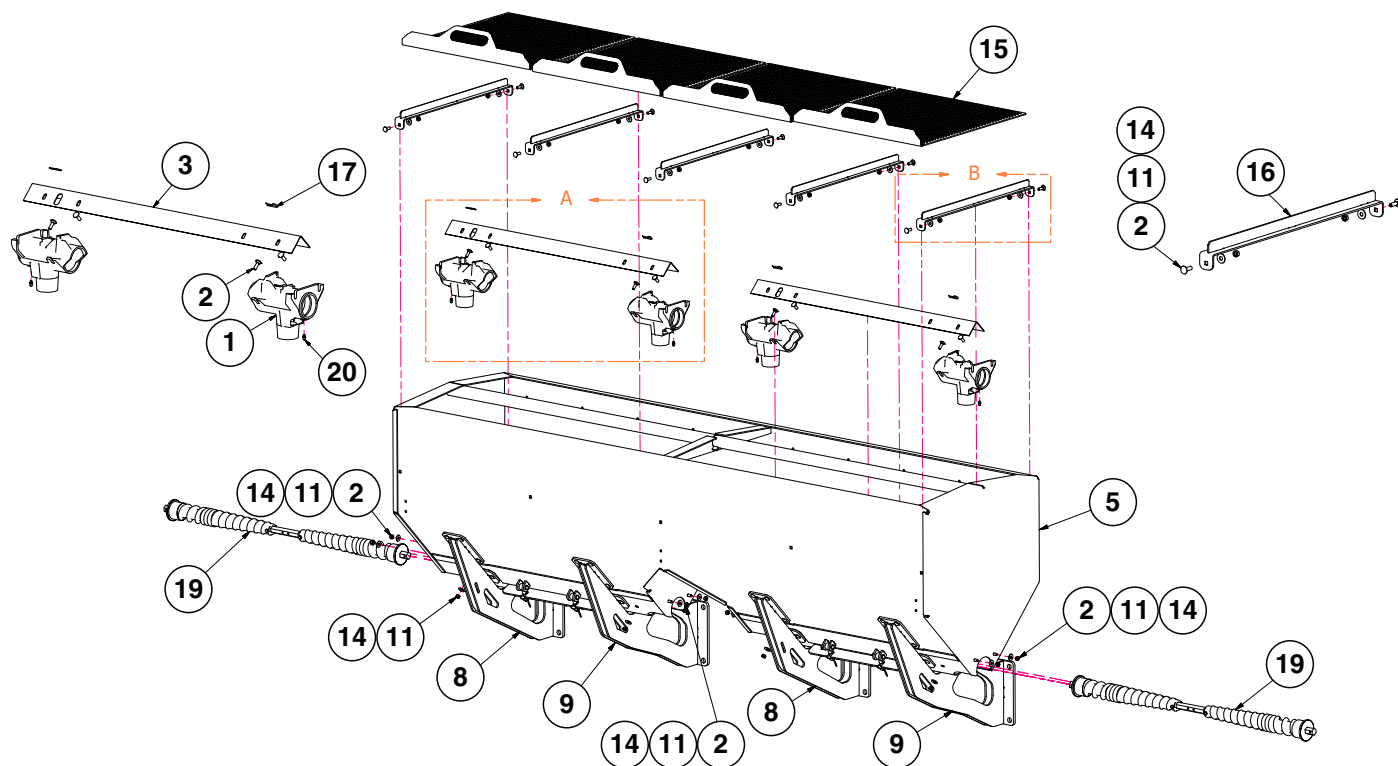


Tank Mounts

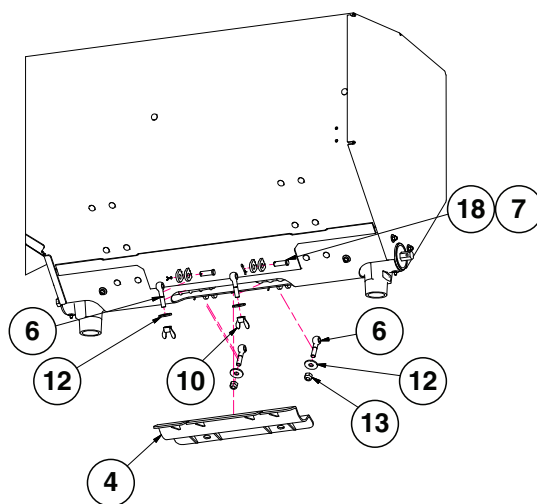

Clean-Out Doors


ITEM	PART NO.	QTY.	DESCRIPTION
1	GD1200	4	Machined Outlet Housing
2	G11942	74	Carriage Bolt, 5/16"-18 x 1"
3	GD1207	2	Baffle
4	GA25908	2	Dry Fertilizer Door
5	GA27037	1	Dry Fertilizer Hopper
6	G12215	8	Eye Bolt, M12 x 60
7	G10451	8	Cotter Pin, 1/8" x 1"
8	G11040601	2	Fertilizer Tank Mount
9	G11040701	2	Offset Fertilizer Tank Mount, R.H. (For R.H. Hopper)
	G11040801	2	Offset Fertilizer Tank Mount, L.H. (For L.H. Hopper)
10	G12216	4	Wing Locknut, M12
11	G10379	74	Flat Washer, 5/16"
12	G12217	8	Flat Washer, M12
13	G12218	4	Hex Locknut, M12
14	G11950	75	Hex Nut, 5/16"-18
15	GA25909	4	Dry Fertilizer Screen
16	GA25757	5	Hopper Stiffener
17	G10670	4	Hair Pin Clip, No. 3
18	G11966	8	Clevis Pin, 7/16" x 1-1/2"
19	GA26640	2	Dry Fertilizer Auger Assembly
20	G10640	4	Grease Fitting, 1/4"-28
21	GD1862	0.5	Tank Pad, 8" x 14' Roll

(11040301/A27124)

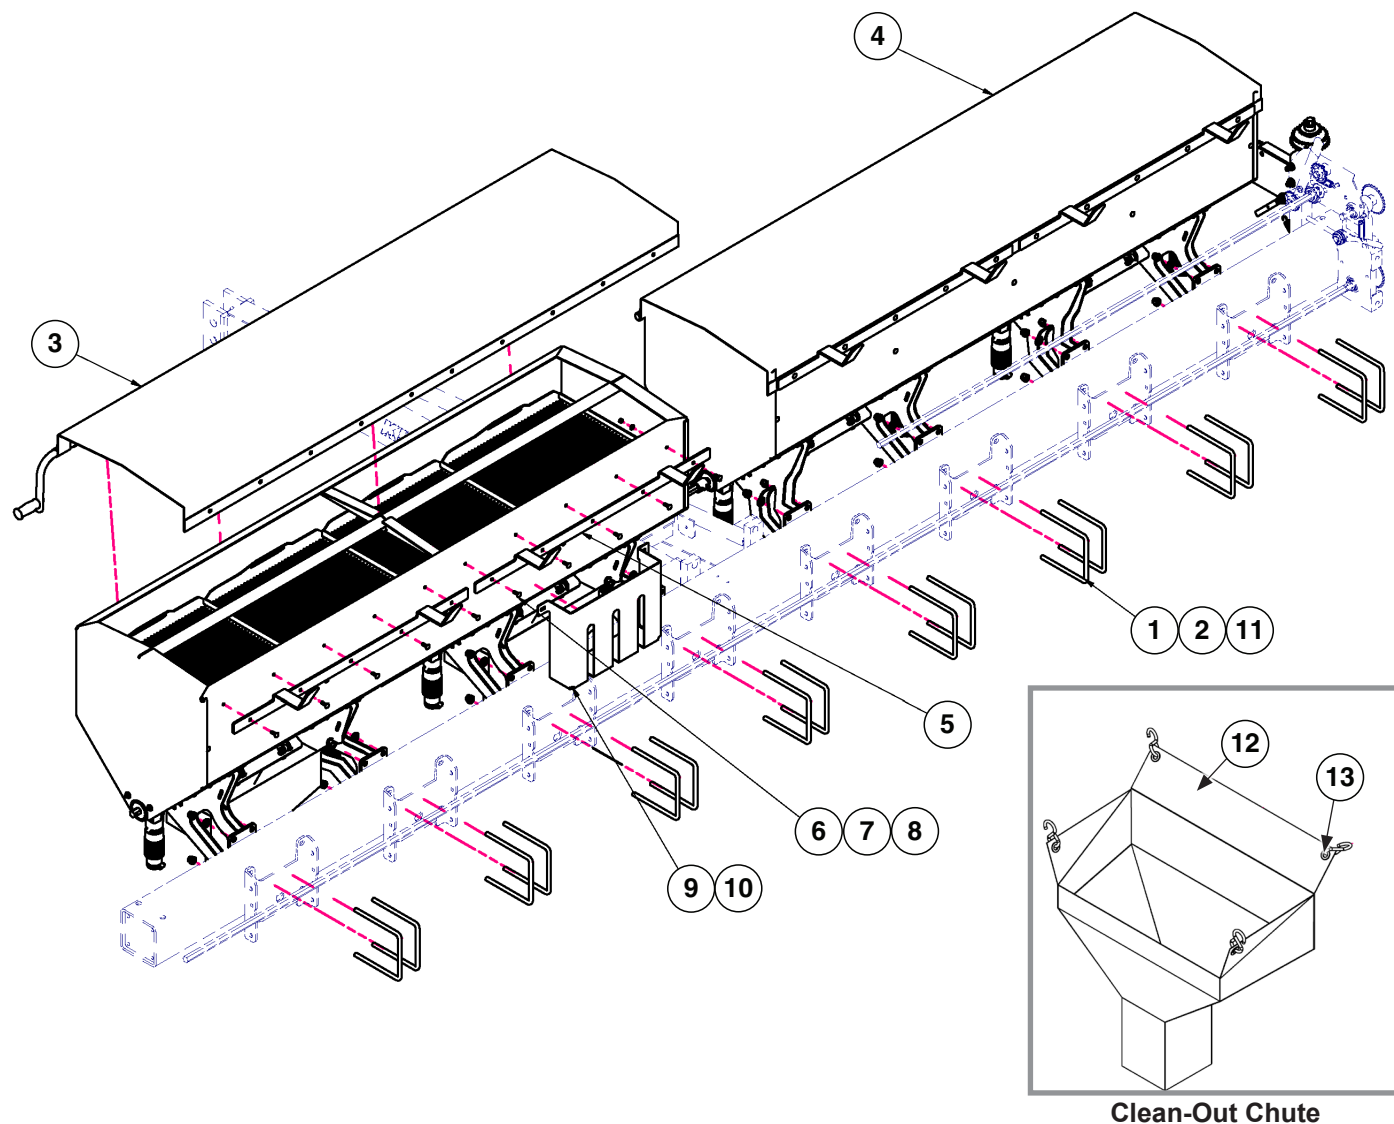


ITEM	PART NO.	QTY.	DESCRIPTION
1	G11391	32	Flat Washer, 5/8"
2	G10107	32	Hex Locknut, 5/8"-11
3	GA25903	1	Tarp and Handle Assembly, R.H.
4	GA25904	1	Tarp and Handle Assembly, L.H.
5	GD35717	4	Tarp Clamp with Catchers
6	G11942	20	Carriage Bolt, 5/16"-18 x 1"
7	G10379	20	Flat Washer, 5/16"
8	G11950	20	Hex Nut, 5/16"-18
9	GD35937	1	Clean-Out Chute Bracket
10	GA27124	2	Clean Out Chute with Hooks
11	GD1114	16	U-bolt, 7" x 7" x 5/8"-11
12	GA27125	2	Clean-Out Chute Assembly
13	GD37025	8	S-Hook, 60 x 30 x 6 mm

(11040301/A21239)

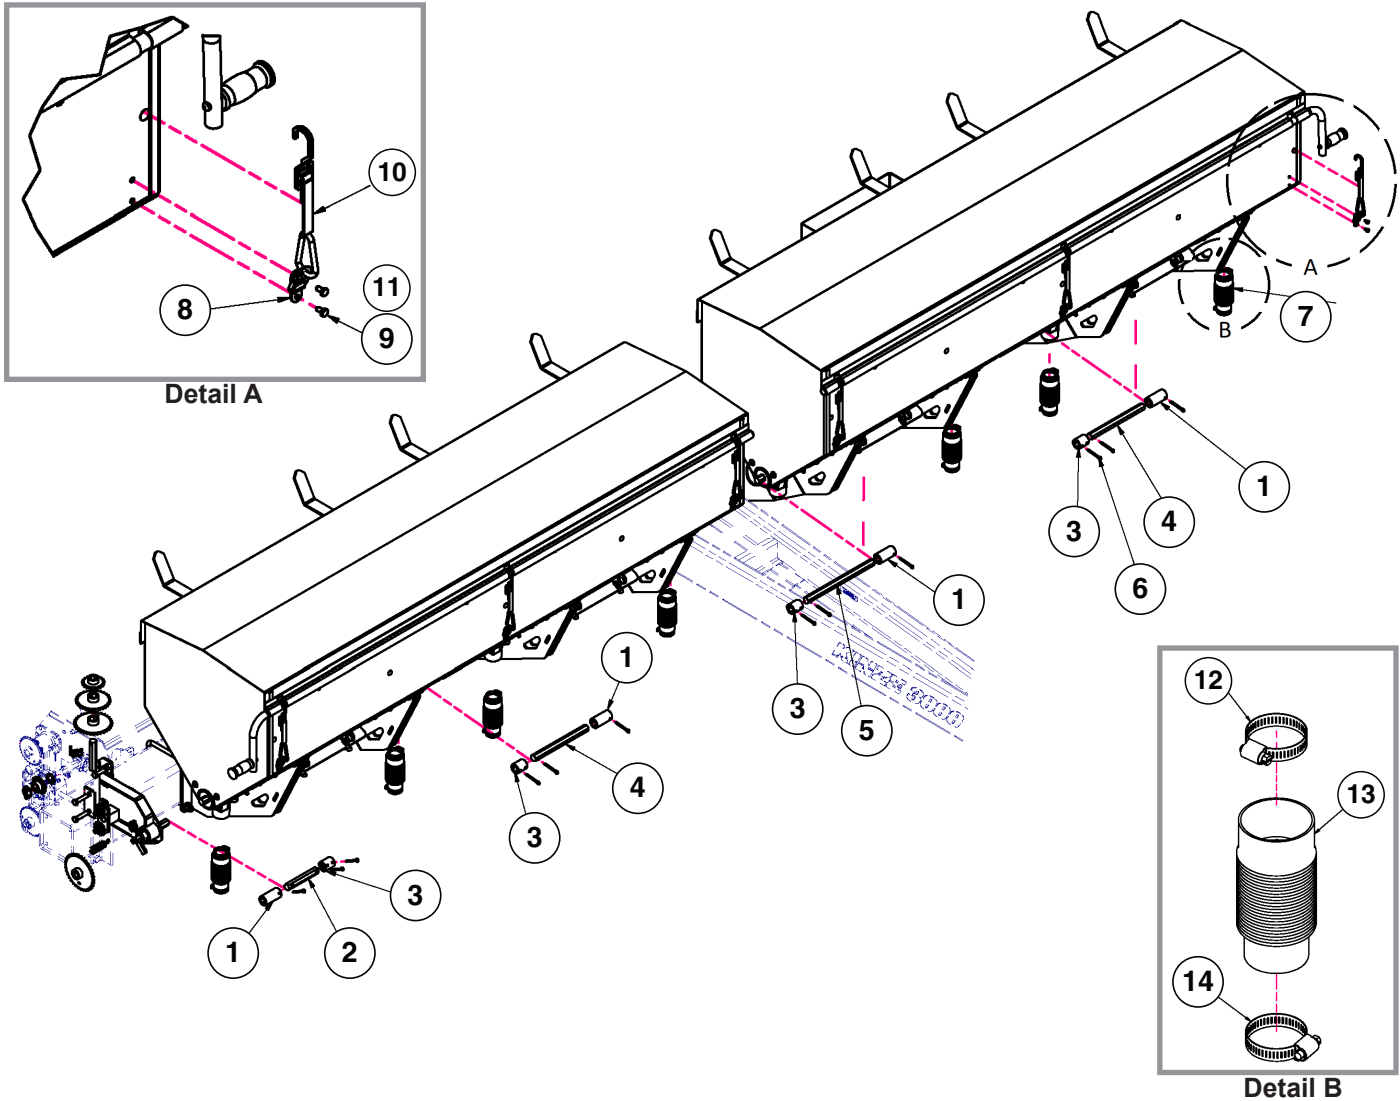



ITEM	PART NO.	QTY.	DESCRIPTION
1	GD7867	4	Coupler, 3"
2	GD37041	1	Hex Drill Shaft, 7/8" x 6" with 2x Holes
3	GD5886	4	Coupler, 7/8" x 1-3/4"
4	GD2548-10.75	2	Hex Drill Shaft, 7/8" x 10.75"
5	G10216501	4	Hex Drill Shaft, 7/8" x 12"
6	G10460	8	Cotter Pin, 1/4" x 2"
7	GA21239	8	Hose with Clamps
8	GD35684	6	Tie Down Ring, .79" x 2.17"
9	G11473	12	Hex Head Cap Screw, 1/4"-20 x 1/2"
10	GD35667	6	Retainer with Carabiner
11	G11474	12	Serrated Flange Nut, 1/4"-20
12	G10676	8	Hose Clamp No. 36
13	GD21398	8	Rubber Drop Tube
14	G10672	8	Hose Clamp No. 28

(A25903/A25904)

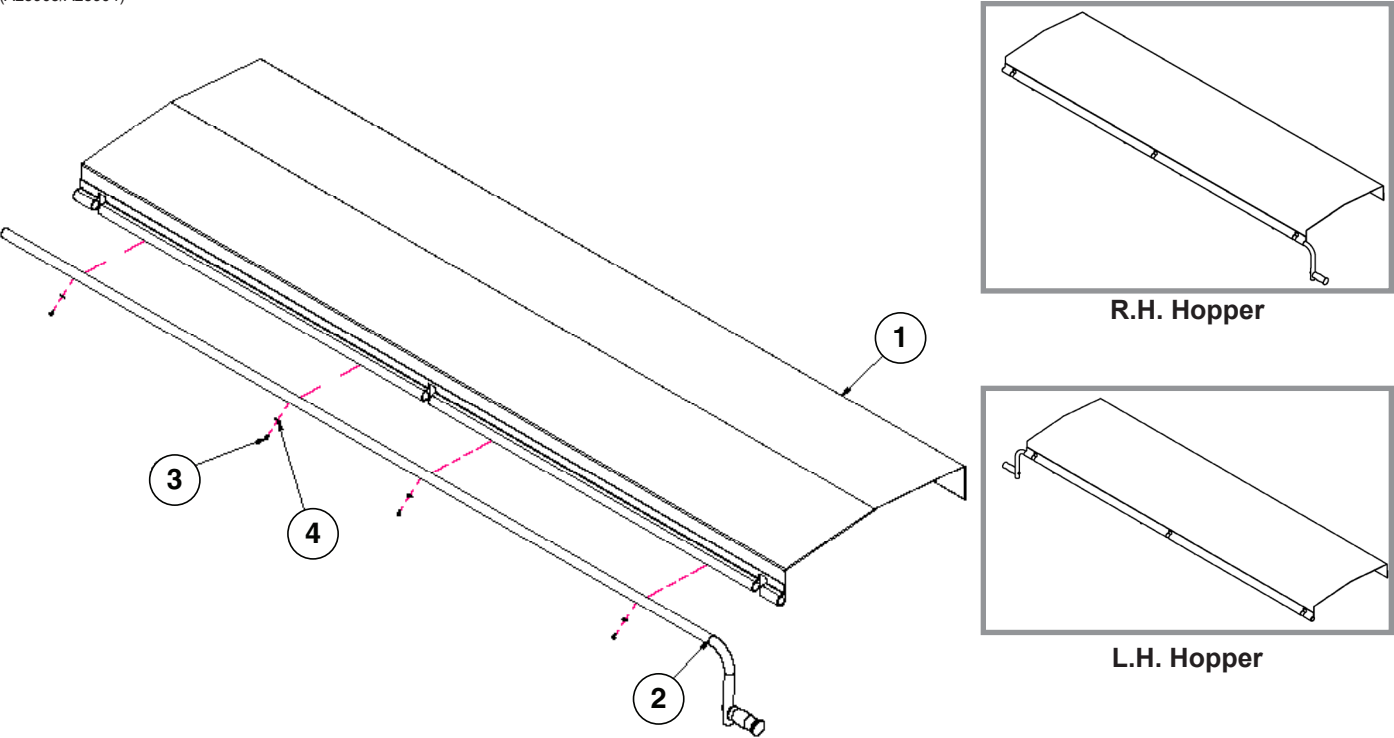



ITEM	PART NO.	QTY.	DESCRIPTION
1	GA25758	1	Dry Fertilizer Tarp
2	GA25902	1	Formed 1" Roll Tube with Handle (Assembly)
3	G11924	4	Hex Head Non Serrated Flange Self-Drilling Screw, No. 6
4	G10243	4	Flat Washer No. 10

LFC012rev(PT36i/PT51)

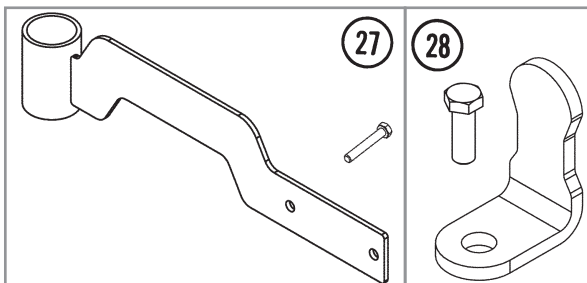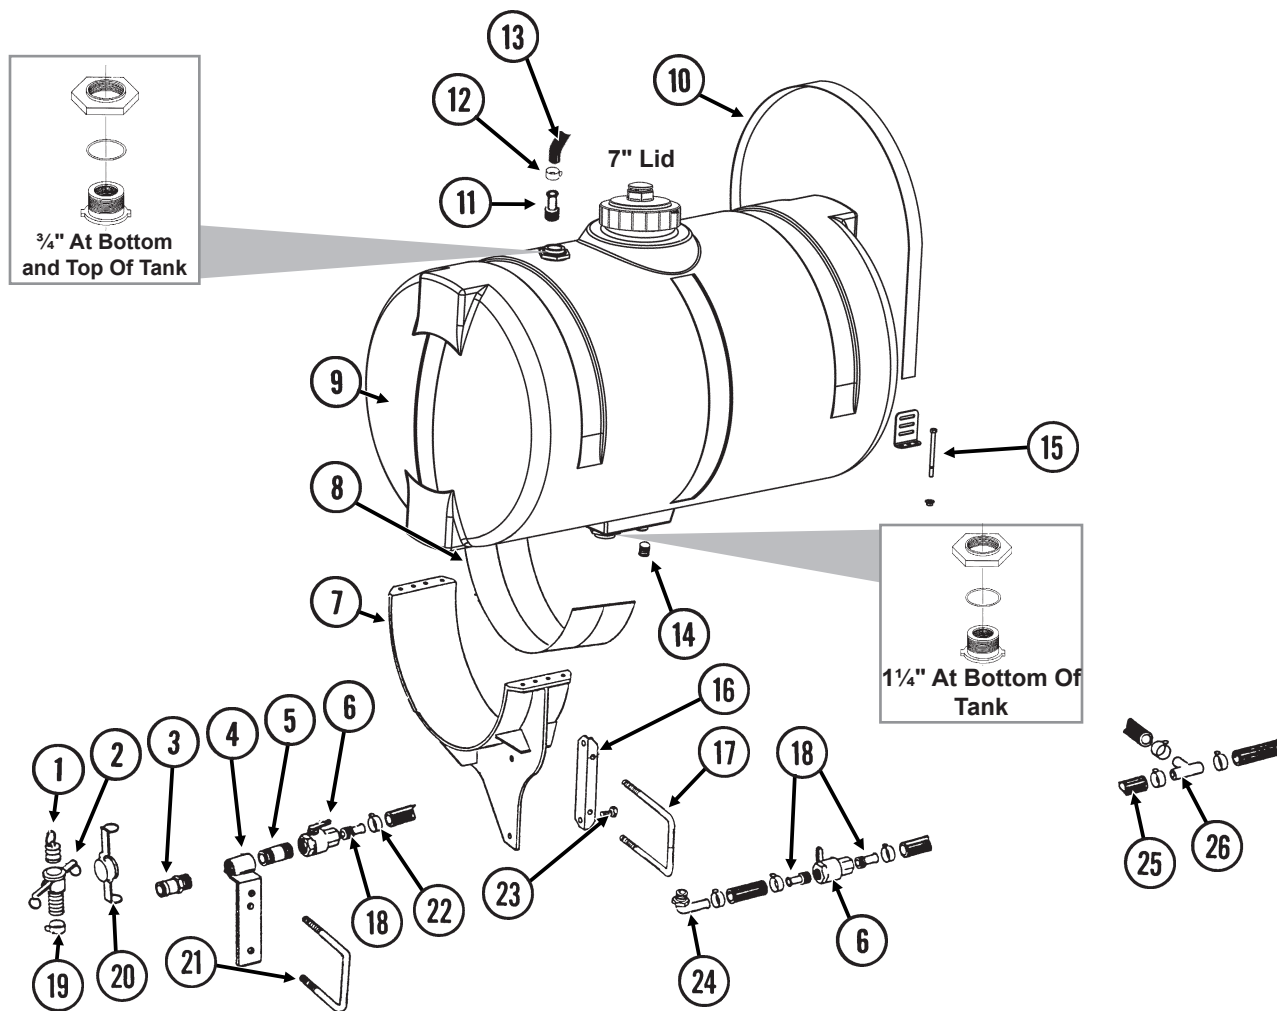


ITEM	PART NO.	QTY.	DESCRIPTION
1	GD1517	1	Dust Plug, 1¼" Male Cam Lock
2	GD1516	1	Adapter, 1¼" Barb To Female Cam Lock
3	GD1514	1	Adapter, 1¼" Male NPT To Cam Lock
4	GA5917	1	Quick Fill Mount
5	G10619	1	Close Nipple, 1¼" NPT
6	GA4976	-	Shutoff Valve, 1¼" NPT
	GR1015	-	Body O-Ring (Included W/GA4976)
	GR1016	-	Stem O-Ring (Included W/GA4976)
	GR1017	-	Teflon Seat (Included W/GA4976)
	GR1018	-	Ball (Included W/GA4976)
	GR1019	-	Handle (Included W/GA4976)
7	GA7375	-	Tank Mount (2 Per Tank)
8	GD1862	-	Pad, 8" x 14' (For Two 30" Tanks)
9	G10856502	-	Tank W/Lid and Fittings, 150 Gallon
	GA16428	-	Lid, 7" (Included W/G10856502)
	GR1941	-	Lid Seal (Included W/G10856502)
	GR1708	-	¾" Polypropylene Fitting Assembly (Overflow Fitting, Nut, Bushing, and O-Ring) (Top and Bottom Of Tank) (Included W/G10856502)
	GR0508	-	1¼" Polypropylene Fitting Assembly (Nut, Bushing, and O-Ring) (Bottom Of Tank) (Included W/G10856502)
10	GD11124	-	Strap, 84"
11	G10626	2	Adapter, 1¼" NPT To Barb
12	G10674	2	Hose Clamp, No. 24
13	G4602-01	1	Black Helix Hose, 1¼" x 18'
14	G10096	-	Pipe Plug, ¾" NPT
15	G10485	-	Hex Head Tap Bolt, ⅜"-16 x 5"
	G10901	-	Lock Nut, ⅜"-16
16	GD10110	-	Mounting Angle (2 Per Tank)
17	GD1748	-	U-Bolt, 7" x 7" x ¾"-10
	G10231	-	Lock Washer, ¾"
	G10105	-	Hex Nut, ¾"-10
18	G10626	-	Adapter, 1¼" NPT To Barb
19	G10672	1	Hose Clamp, No. 28
20	GD1515	1	Dust Cap, 1 ¼" Cam Lock
21	GD7145	1	U-Bolt, 7" x 7" x ½"-13
	GD11721	1	U-Bolt, 5" x 7" x ½"-13
	G10228	2	Lock Washer, ½"
	G10102	2	Hex Nut, ½"-13
22	G10674	-	Hose Clamp, No. 24
23	G10007	-	Hex Head Cap Screw, ⅝"-11 x 1½"
	G10230	-	Lock Washer, ⅝"
	G10104	-	Hex Nut, ⅝"-11
24	G10629	-	Elbow, 90°, 1¼" NPT To Barb
25	G4200-02	-	Hose, 1¼" x 27', 6 Row
	G4200-03	-	Hose, 1¼" x 32', 8 Row
26	G10633	-	Tee, 1¼" Barb
27	GA14112	-	Hose Guide
	G10004	-	Hex Head Cap Screw, ⅜"-16 x 1¼"
	G11091	-	Serrated Flange Nut, ⅜"-16
28	GD20060	-	Hose Bracket
	G10004	-	Hex Head Cap Screw, ⅜"-16 x 1¼"
	G11091	-	Serrated Flange Nut, ⅜"-16
29	GD11123	-	Anchor

(106095)

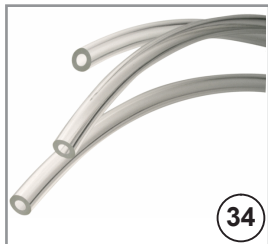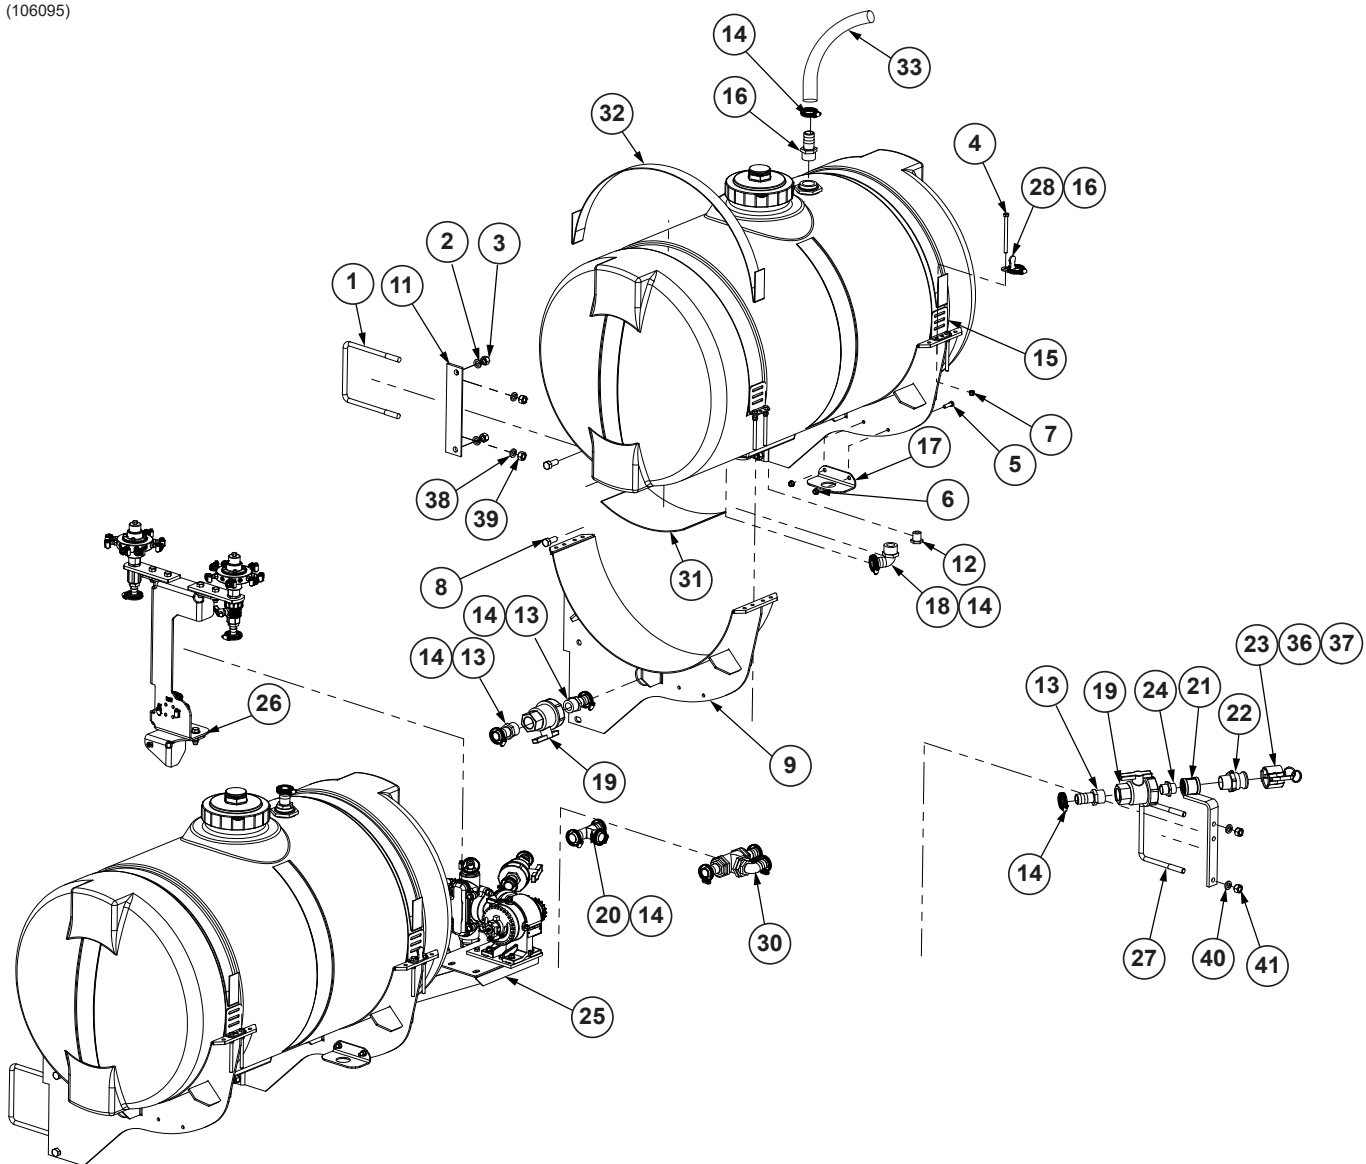


3/8" PVC
(Flow Divider to Row Unit)

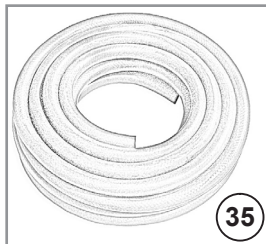

1-1/4" EPDM
(Between Tanks)


ITEM	PART NO.	QTY.	DESCRIPTION
1	GD1748	4	U-Bolt, 7" x 7" x 3/4"-10
2	G10230	8	Lock Washer, 5/8"
3	G10104	8	Hex Nut, 5/8"-11
4	G10485	16	Hex Head Cap Screw, 3/8"-16 x 5"
5	G10004	4	Hex Head Cap Screw, 3/8"-16 x 1 1/4"
6	G11091	4	Serrated Flange Nut, 3/8"-16
7	G10901	16	Lock Nut, 3/8"-16
8	G10007	8	Hex Head Cap Screw, 5/8"-11 x 1 1/2"
9	GA7375	4	Tank Mount (2 Per Tank)
10	G10856502	2	Tank W/Sealed Lid and Fittings, 150 Gallon
11	GD10110	4	Mounting Angle (2 Per Tank)
12	G10096	2	Pipe Plug, 3/4" NPT
13	G10626	11	Adapter, 1 1/4" NPT To Barb
14	G10674	12	Hose Clamp, No. 24
15	GD11123	8	Anchor
16	GD20060	2	Hose Bracket
17	G10610601	2	Hose Holder
18	G10629	2	Elbow, 90°, 1 1/4" NPT To Barb
19	GA4976	4	Shutoff Valve, 1 1/4" NPT
20	G10633	1	Tee, 1 1/4" Barb
21	GA5917	1	Quick Fill Mount
22	GD1514	1	Adapter, 1 1/4" Male NPT To Cam Lock
23	GD1515	1	Dust Cap, 1 1/4" Cam Lock
24	G10619	1	Close Nipple, 1 1/4" NPT
25	---	-	See "Split Row Liquid Fertilizer Piston Pump Drive" on page P110
26	---	-	See "Split Row Liquid Fertilizer Divider Assembly" on page P112
27	GD11721	1	U-Bolt, 5" x 7" x 1/2"-13
28	G10278	6	Hose Clamp, No. 16
29	GA3893	1	Strainer Complete
30	G10609901	1	Tee Assembly
31	GD1862	1	Support
32	GD11124	4	Strap, 84"
33	G4602-21	2	Black Helix Hose, 1-1/4" x 7.8'
34	G4301-07	1	Hose, 3/8" x 200'
	G10681	15	Hose Clamp, No. 6
35	G4200-03	1	Hose, 1 1/4" x 32'
36	GD1516	1	Adapter, 1 1/4" Barb To Female Cam Lock
37	GD1517	1	Dust Plug, 1 1/4" Male Cam Lock
38	G10231	8	Lock Washer, 3/4"
39	G10105	8	Hex Nut, 3/4"-10
40	G10228	2	Lock Washer, 1/2"
41	G10102	2	Hex Nut, 1/2"-13

(106096)

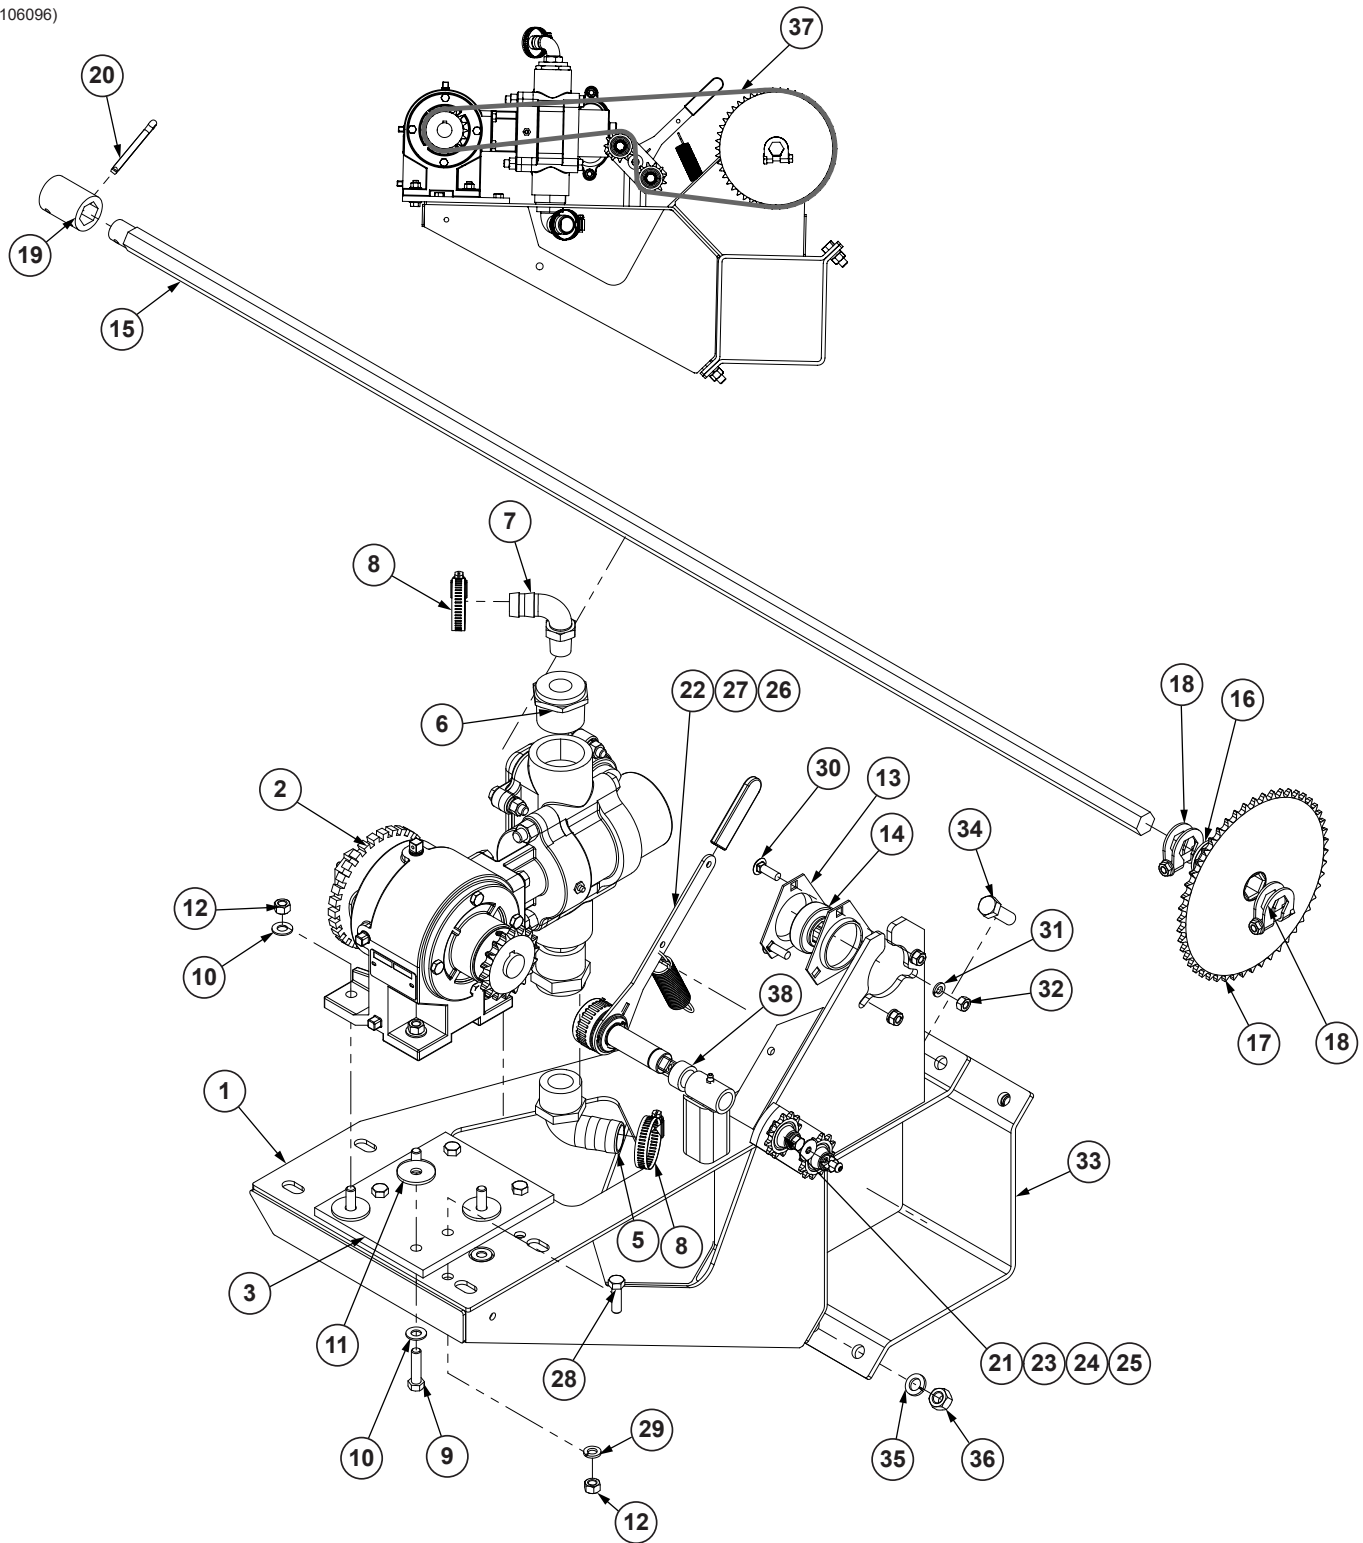

ITEM	PART NO.	QTY.	DESCRIPTION
1	GA6501	1	Drive Plate W/Grease Fitting
2	---	-	See "Piston Pump Complete W/18 Tooth Sprocket (Model NGP-6055)" on page P118
3	GD11180	1	Plate
4	G10615	1	Reducing Bushing, 1 1/2" Male NPT To 1 1/4" Female
5	G10629	1	Elbow, 90°, 1 1/4" NPT To Barb
6	G11237	1	Reducing Bushing, 1 1/2" Male NPT To 3/4" Female
7	G10917	1	Elbow, 90°, 3/4" NPT To Barb
8	G10278	2	Hose Clamp, No. 16
9	G10003	4	Hex Head Cap Screw, 3/8"-16 x 1 1/2"
10	G11387	8	Flat Washer, 3/8" SAE
11	GR1122	4	Mounting Pad
12	G10101	8	Hex Nut, 3/8"-16
13	G3400-01	2	Flangette
14	G2100-03	1	Bearing, 7/8" Hex Bore, Spherical
15	G10610701	1	Fertilizer Pump Shaft
16	G10233	2	Machine Bushing, 1 1/2" x 1/32", 10 Gauge (.1345")
17	GA5194	1	Sprocket, 50 Tooth
18	GA11331	2	Hex Lock Clamp Assembly
19	GD3839	1	Coupler, 2"
20	G10460	1	Cotter Pin, 1/4" x 2"
21	GA7336	1	Idler W/Bolt-On Sprockets
22	GA10030	1	Spring
23	G11100	1	Hex Socket Button Head Cap Screw, 1/4"-20 x 1/2", Grade 8
24	G11453	1	Fender Washer, 1/4"
25	G10227	1	Lock Washer, 1/4"
26	G11078	1	Vinyl Cap
27	GD5857	1	Spring
28	G10004	4	Hex Head Cap Screw, 3/8"-16 x 1 1/4"
29	G10229	4	Lock Washer, 3/8"
30	G10303	3	Carriage Bolt, 5/16"-18 x 1"
31	G10232	3	Lock Washer, 5/16"
32	G10106	3	Hex Nut, 5/16"-18
33	GD15685	1	Clamp
34	G10017	4	Hex Head Cap Screw, 1/2"-13 x 1 1/2"
35	G10228	4	Lock Washer, 1/2"
36	G10102	4	Hex Nut, 1/2"-13
37	G3310-126	1	Chain, No. 40, 126 Pitch Including Connector Link
38	GD2734-08	1	Sleeve, 1 1/4" O.D. x 5/8" Long


(106097)

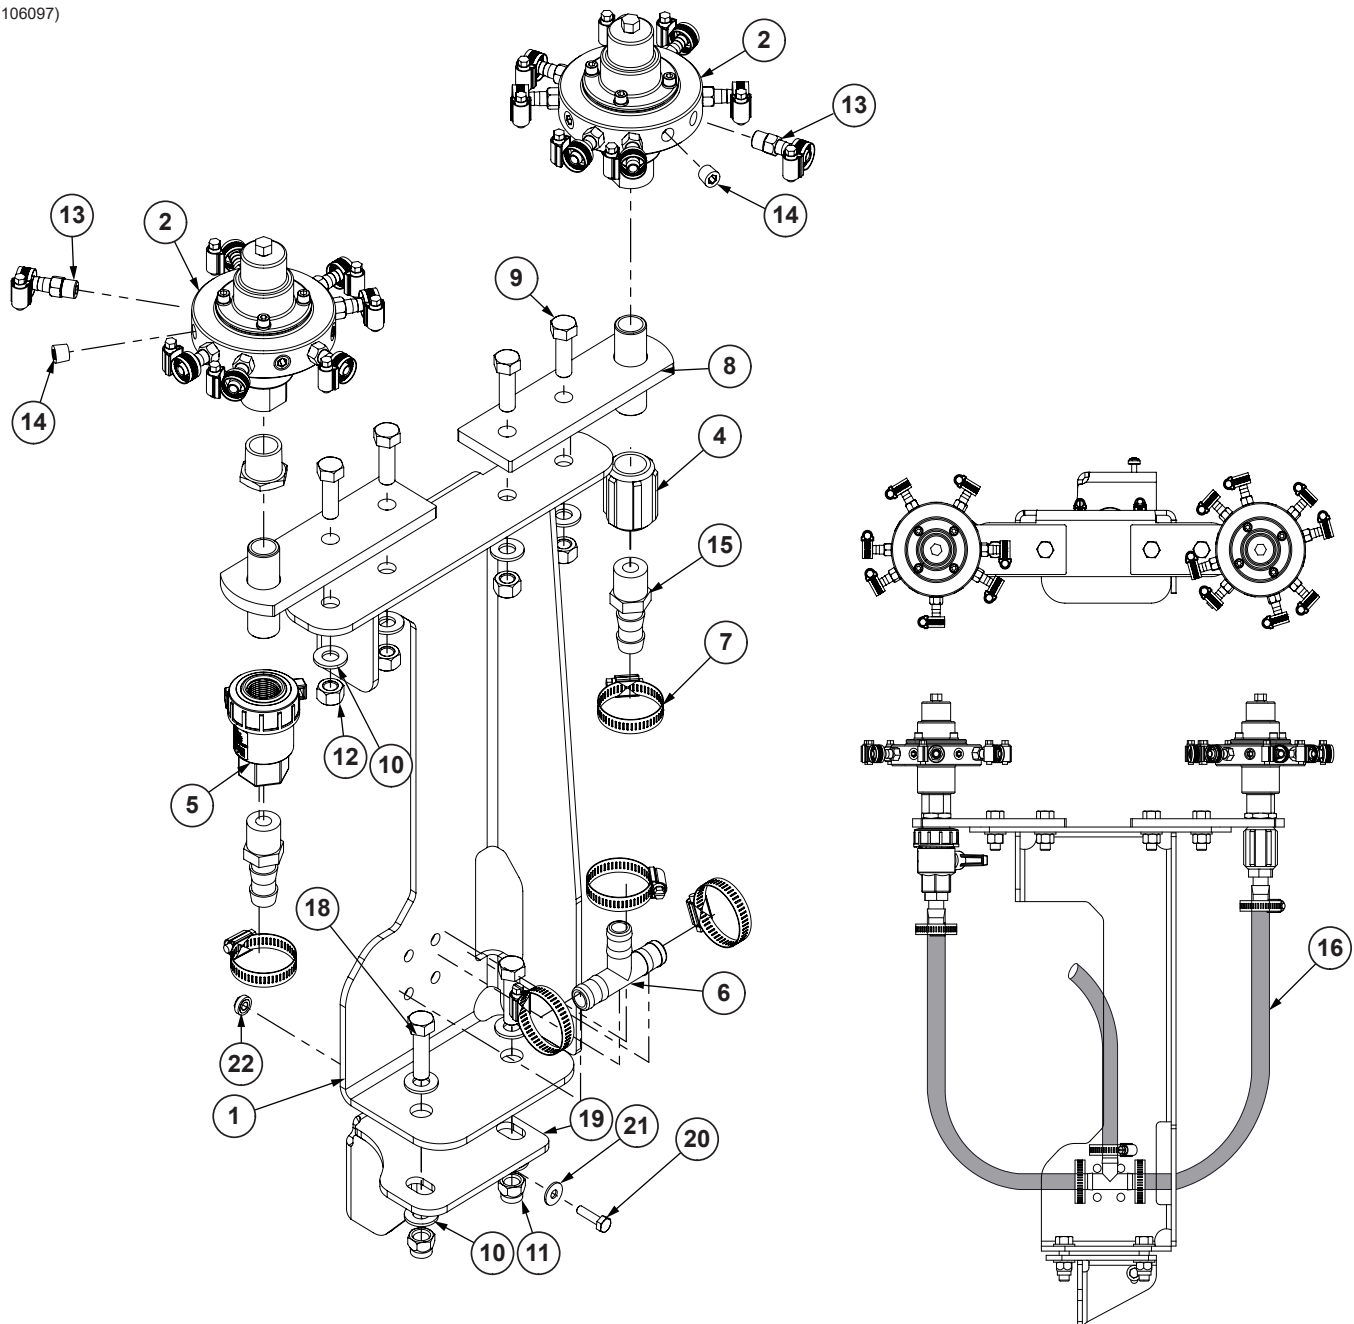

ITEM	PART NO.	QTY.	DESCRIPTION
1	G10609801	1	Divider Holder
2	GA8931	2	See "Liquid Fertilizer Piston Pump Flow Divider" on page P120
3	---	-	---
4	G11083	1	Coupler, 3/4" Female NPT
5	G10696401	1	Banjo Valve UV075FP, 3/4"
6	G11503	1	Tee, 3/4" Hose Barb
7	G10278	5	Hose Clamp, No. 16
8	G10696601	2	Divider Plate
9	G10017	4	Hex Head Cap Screw, 1/2"-13 x 1 1/2"
10	G11389	8	Flat Washer, 1/2" Plated SAE
11	G10974	2	Lock Nut W/Nylon Insert, 1/2"-13
12	G10102	4	Hex Nut, 1/2"-13
13	GD11700	15	Adapter, 1/4" NPT To 3/8" Barb
14	G10350	9	Hex Socket Head Plug, 1/4" NPT, Stainless Steel
15	G10734	2	Adapter, 3/4" NPT To Barb
16	G4205-11	1	Hose, 3/4" x 72" (One Per Tank)
17	G10681	15	Hose Clamp, No. 6
18	G10039	2	Hex Head Cap Screw, 1/2"-13 x 1 3/4"
19	G10690901	1	Stiffen Plate
20	G10064	1	Hex Head Cap Screw, 1/4"-20 x 1"
21	G10209	1	Washer, 1/4" USS
22	G10323	1	Hex Flange Nut, 1/4"-20, No Serrations

(FRTZ269)


50 Tooth Drive Sprocket and 18 Tooth Driven Sprocket

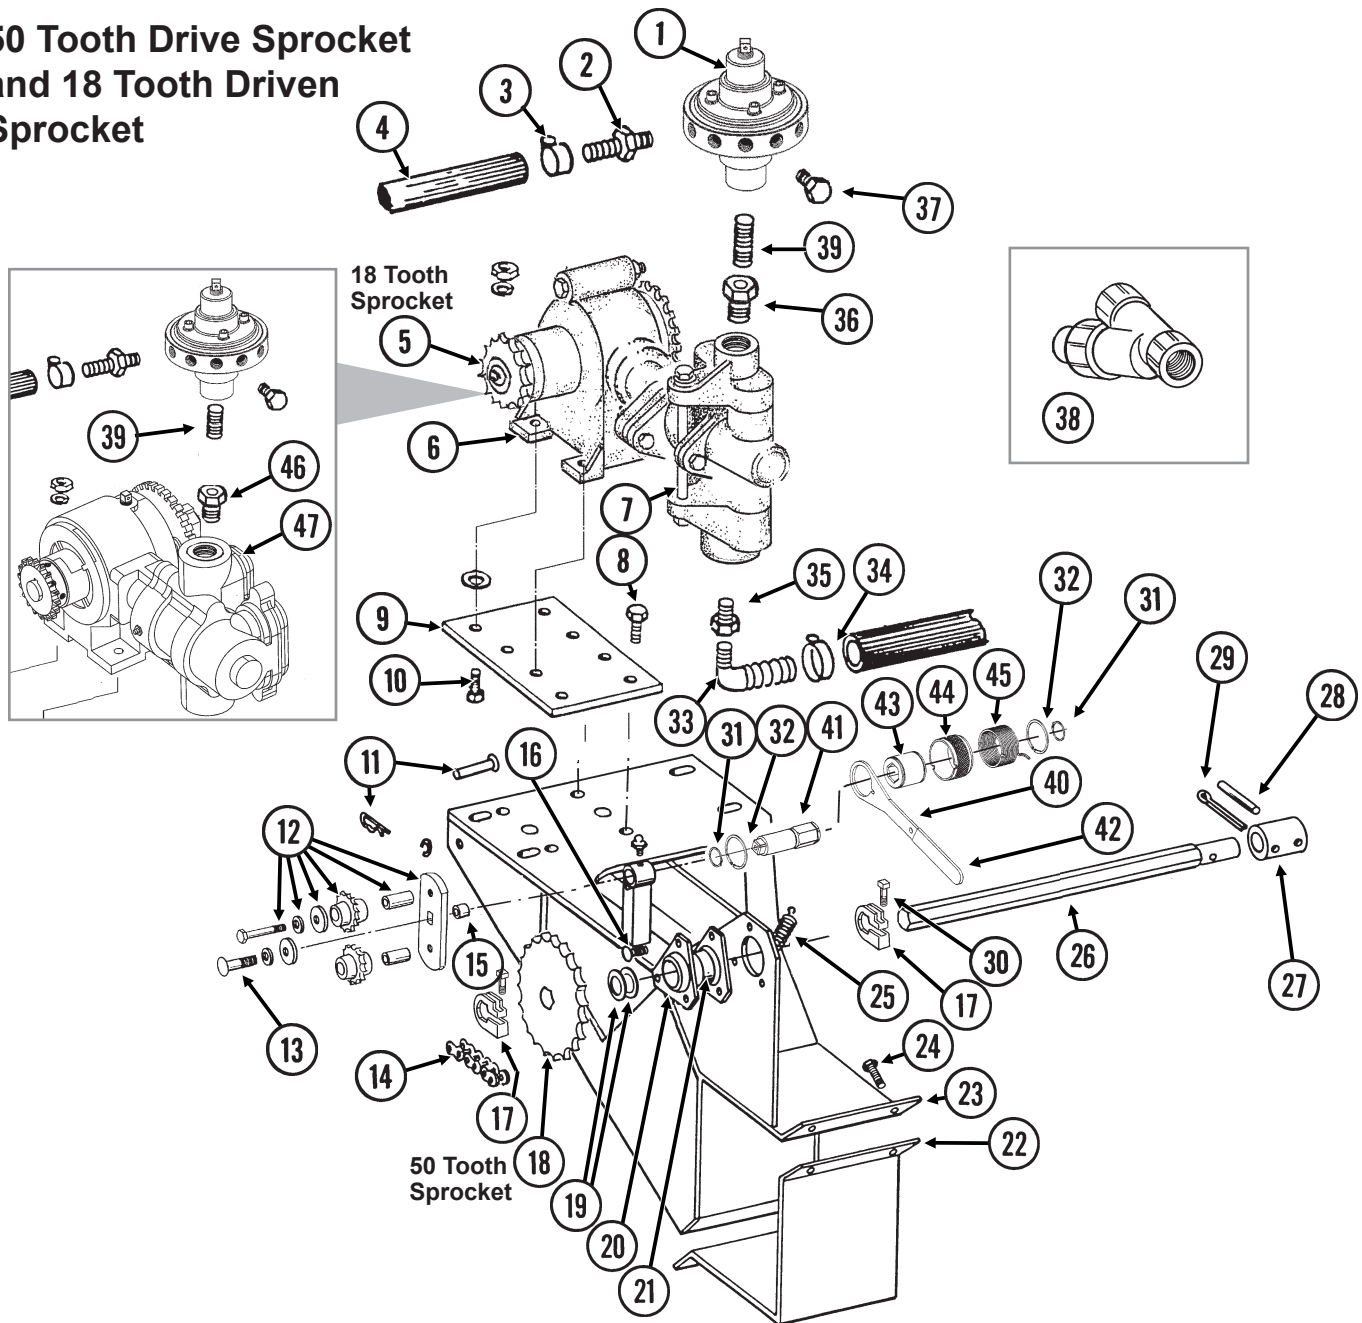

ITEM	PART NO.	QTY.	DESCRIPTION
1	---	-	See "Liquid Fertilizer Piston Pump Flow Divider" on page P120
2	GD11700	-	Adapter, 1/4" NPT To 3/8" Barb
3	G10681	-	Hose Clamp, No. 6
4	G4301-03	1	Hose, 3/8" x 60', 6 Row
	G4301-04	-	Hose, 3/8" x 100', 8 Row
5	---	-	See "Liquid Fertilizer Piston Pump Uses 18 Tooth Sprocket" on page P118
6	---	-	See "Liquid Fertilizer Piston Pump Uses 18 Tooth Sprocket" on page P118
7	---	-	See "Liquid Fertilizer Piston Pump Uses 18 Tooth Sprocket" on page P118
8	G10004	4	Hex Head Cap Screw, 3/8"-16 x 1 1/4"
	G10229	4	Lock Washer, 3/8"
	G10101	4	Hex Nut, 3/8"-16
9	GD11180	1	Plate
10	G10003	4	Hex Head Cap Screw, 3/8"-16 x 1 1/2"
	G11387	4	Flat Washer, 3/8" SAE
	GR1122	4	Mounting Pad
	G10229	4	Lock Washer, 3/8"
	G10101	4	Hex Nut, 3/8"-16
11	G10478	1	Clevis Pin, 5/16" x 1"
	G10409	1	Retaining Ring, 5/16"
	G10670	1	Hair Pin Clip, No. 3
12	GA7336	1	Idler W/Bolt-On Sprockets
	GD7426	-	Sprocket, 12 Tooth (Included W/GA7336)
	GD1026	-	Sleeve, 1 3/4" Long (Included W/GA7336)
	G11387	-	Flat Washer, 3/8" SAE (Included W/GA7336)
	G10229	-	Lock Washer, 3/8" (Included W/GA7336)
	G10047	-	Hex Head Cap Screw, 3/8"-16 x 1 3/4" (Included W/GA7336)
13	G11100	1	Hex Socket Button Head Cap Screw, 1/4"-20 x 1/2", Grade 8
	G10227	1	Lock Washer, 1/4"
	G11453	1	Fender Washer, 1/4"
14	G3310-126	1	Chain, No. 40, 126 Pitch Including Connector Link
	GR0912	-	Connector Link, No. 40
15	GD2734-08	1	Sleeve, 1 1/4" O.D. x 5/8" Long
16	G10303	3	Carriage Bolt, 5/16"-18 x 1"
	G10232	3	Lock Washer, 5/16"
	G10106	3	Hex Nut, 5/16"-18
17	GD11045	2	Lock Clamp
	G10130	-	Square Head Machine Bolt, 5/16"-18 x 1 3/4"
	G10923	-	Flange Nut, 5/16"-18, No Serration
18	GA5194	1	Sprocket, 50 Tooth
19	G10233	2	Machine Bushing, 1", 10 Gauge
20	G3400-01	2	Flangette
21	G2100-03	1	Bearing, 7/8" Hex Bore, Spherical
22	GD15685	1	Clamp
23	GA6501	1	Drive Plate W/Grease Fitting
	G10641	-	Grease Fitting, 1/8" NPT
	G10640	-	Grease Fitting, 1/4"-28
24	G10017	4	Hex Head Cap Screw, 1/2"-13 x 1 1/2"
	G10228	4	Lock Washer, 1/2"
	G10102	4	Hex Nut, 1/2"-13
25	GD5857	1	Spring
26	GD5990	1	Shaft, 74"
27	GD3839	1	Coupler, 2"
28	G10602	1	Spring Pin, 1/4" x 1 1/2"
29	G10460	1	Cotter Pin, 1/4" x 2"


ITEM	PART NO.	QTY.	DESCRIPTION
30	G10130	-	Square Head Machine Bolt, $\frac{5}{16}$ "-18 x $1\frac{3}{4}$ "
	G10923	-	Flange Nut, $\frac{5}{16}$ "-18, No Serration
31	G11075	2	External Inverted Snap Ring, $\frac{7}{8}$ "
32	G10496	2	External Inverted Snap Ring, $1\frac{1}{2}$ "
33	G10629	1	Elbow, 90°, $1\frac{1}{4}$ " NPT To Barb
34	---	-	See "Liquid Fertilizer Tanks, Saddles, Mounts, Hoses, and Fittings, 6 and 8 Row" on page P106
35	G10615	1	Reducing Bushing, $1\frac{1}{2}$ " Male NPT To $1\frac{1}{4}$ " Female
36	G10995	1	Reducing Bushing, 1" Male NPT To $\frac{3}{4}$ " Female, Stainless Steel
37	G10292	-	Pipe Plug, $\frac{1}{4}$ " NPT
38	GA3893	1	Strainer Complete
	GR0880	-	Screen, No. 40 Mesh (Included W/GA3893)
	GR0881	-	Gasket (Included W/GA3893)
	GR0882	-	Y-Body (Included W/GA3893)
	GR0883	-	End Cap (Included W/GA3893)
39	G10994	1	Close Nipple, $\frac{3}{4}$ " NPT, Stainless Steel
40	GD14431	1	Handle
41	GD14427	1	Tightener Shaft, $4\frac{7}{8}$ "
42	G11078	1	Vinyl Cap
43	GD14432	1	Sleeve, $1\frac{1}{4}$ "
44	GD19343	1	Release Collar, R.H.
45	GD14413	1	Torsion Spring, L.H. (Used On R.H. Wrap Spring Wrench)
46	G11237	1	Reducing Bushing, $1\frac{1}{2}$ " Male NPT To $\frac{3}{4}$ " Female
47	---	-	See "Liquid Fertilizer Piston Pump Uses 18 Tooth Sprocket" on page P118
A	G1K269	-	Lock Clamp Kit (Items 17 and 30)
B	G1K378	-	Wrap Spring Wrench Replacement Kit, Blue Collar, R.H., (Items 13, 15, 31, 32 and 41-46)

(A18821a)

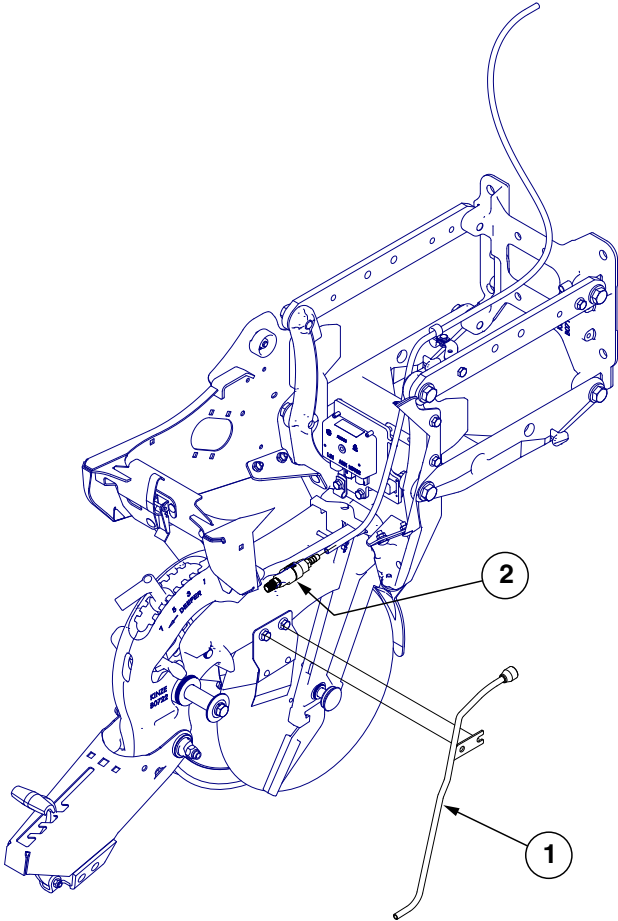


ITEM	PART NO.	QTY.	DESCRIPTION
1	GA18822	-	Liquid Fertilizer Tube
2	GA20583	-	Check Valve Assembly

(A12335a/GR1808)

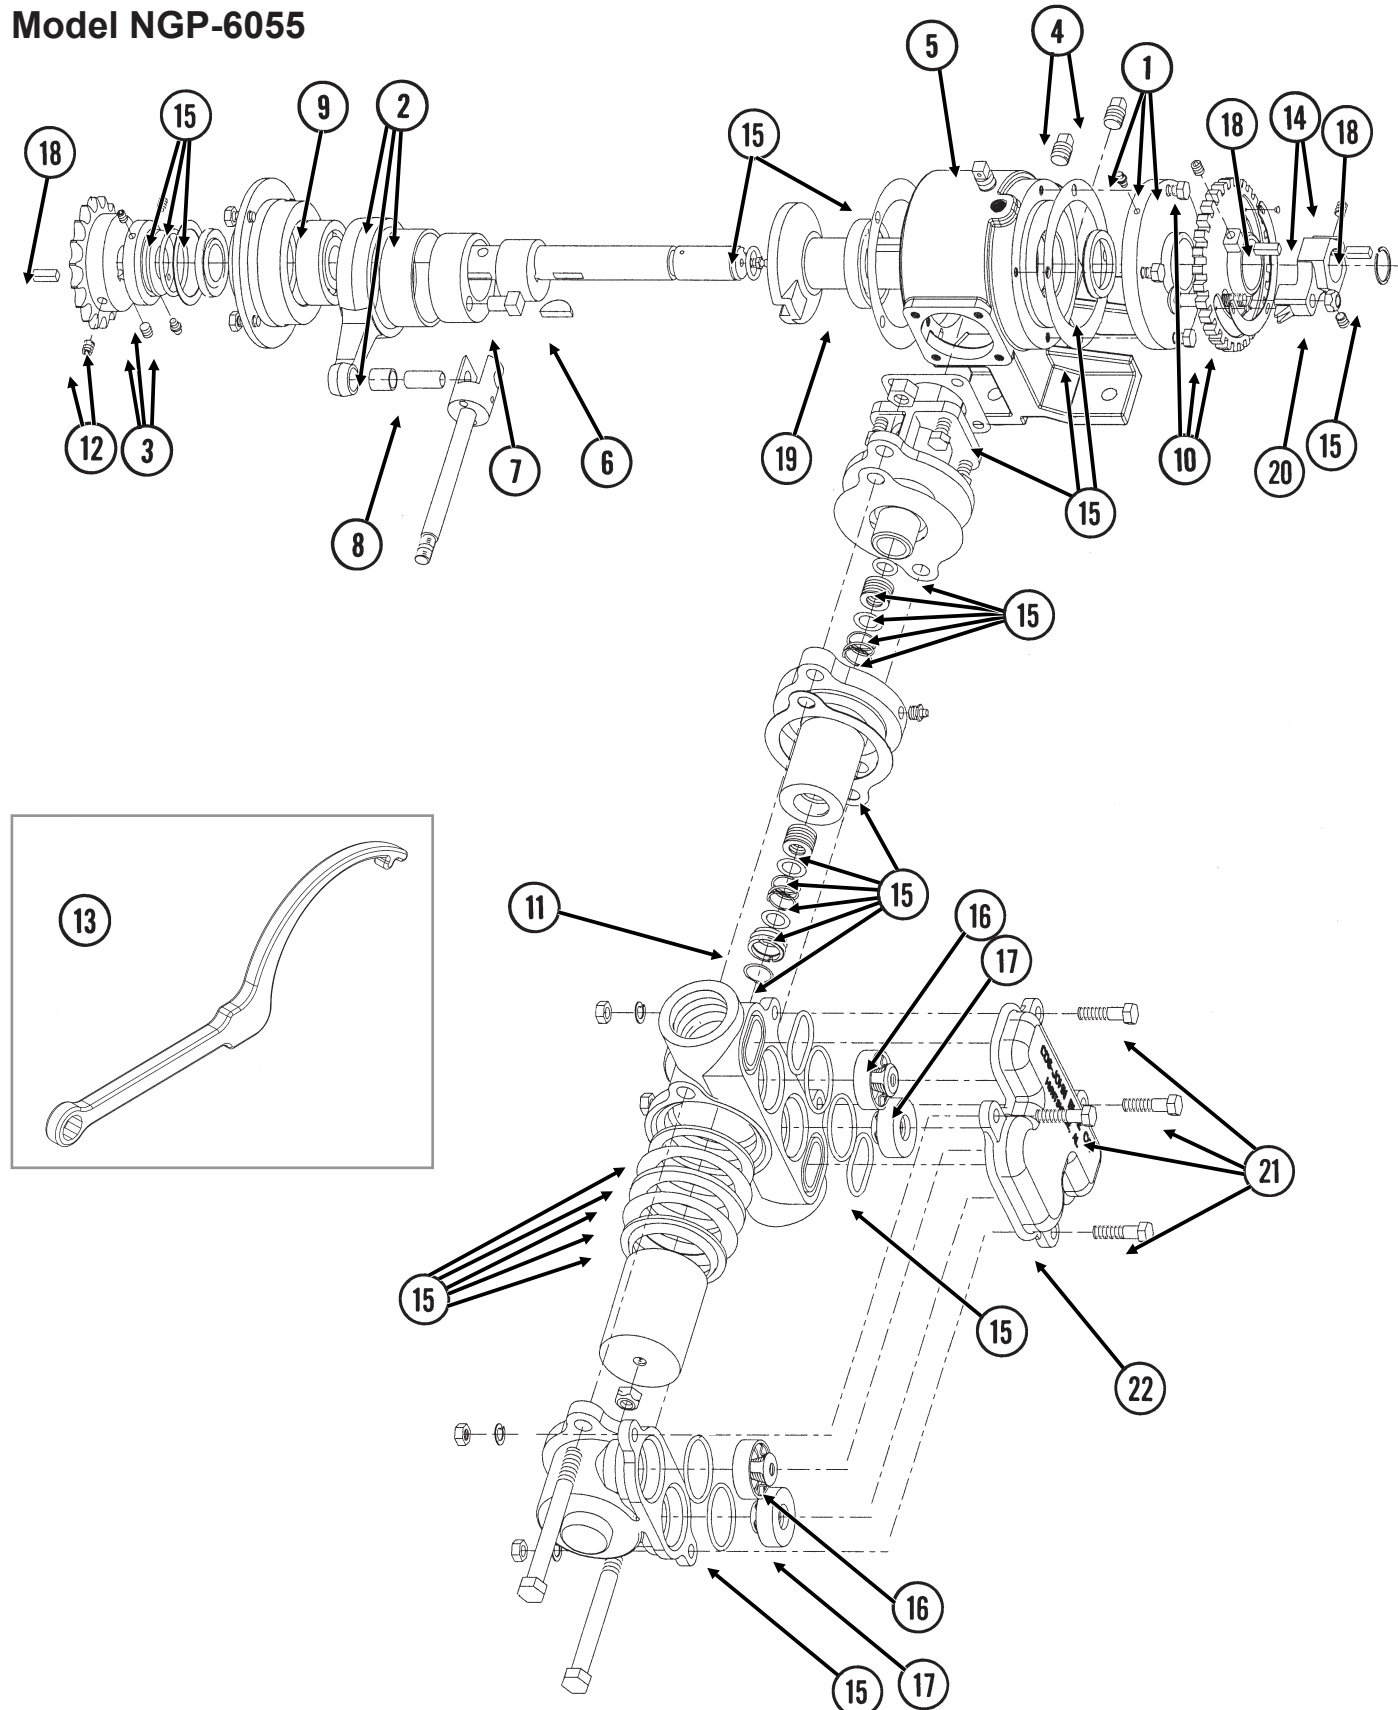Model NGP-6055


ITEM	PART NO.	QTY.	DESCRIPTION
1	GR1804	1	Flange Cover Assembly
	G10991	4	Hex Head Cap Screw, $\frac{5}{16}$ "-18 x $\frac{7}{8}$ "
2	GR1802	1	Connecting Rod Assembly
3	GR1801	1	Spacer Assembly
	G10693	3	Hex Socket Head Set Screw, $\frac{5}{16}$ "-18 x $\frac{3}{8}$ "
4	GR1123	2	Plug
5	GR1543	1	Vent Plug
6	GR1112	1	Woodruff Key
7	GR1120	1	Eccentric Pin
8	GR1124	1	Pin
9	GR1104	1	Bearing
10	GR1805	1	Setting Hub Assembly
11	GR1134	1	Stuffing Box Insert
12	GR1389	1	Sprocket, 18 Tooth
13	GR1808	1	Adjustment Wrench
14	GR1806	1	Setting Pointer Assembly
15	GR1795	1	Repair Kit, Includes: (6) Gaskets, (9) O-Rings, (4) Washers, (1) Retaining Ring, (2) Oil Seals, (1) Snap Ring, (1) Thrust Washer, (1) Rod Bushing, (2) Flange Plunger Packings, (2) Packing Springs, (2) Rod Vee Packing Sets
16	GR1799	2	Discharge Valve Assembly
17	GR1797	2	Suction Valve Assembly
18	GR1118	3	Setting Arm Key
19	GR1116	1	Bearing
20	G10306	1	Carriage Bolt, $\frac{3}{8}$ "-16 x 2"
	G10108	1	Lock Nut, $\frac{3}{8}$ "-16
21	G10003	4	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x $1\frac{1}{2}$ "
	G11387	4	Flat Washer, $\frac{3}{8}$ " SAE
	G10229	4	Lock Washer, $\frac{3}{8}$ "
	G10101	4	Hex Nut, $\frac{3}{8}$ "-16
22	GR2003	1	Valve Cover
A	GA12330	-	Piston Pump Complete W/18 Tooth Sprocket (Model NGP-6055)

(FRTZ159/PT40a/FRTZ202c)

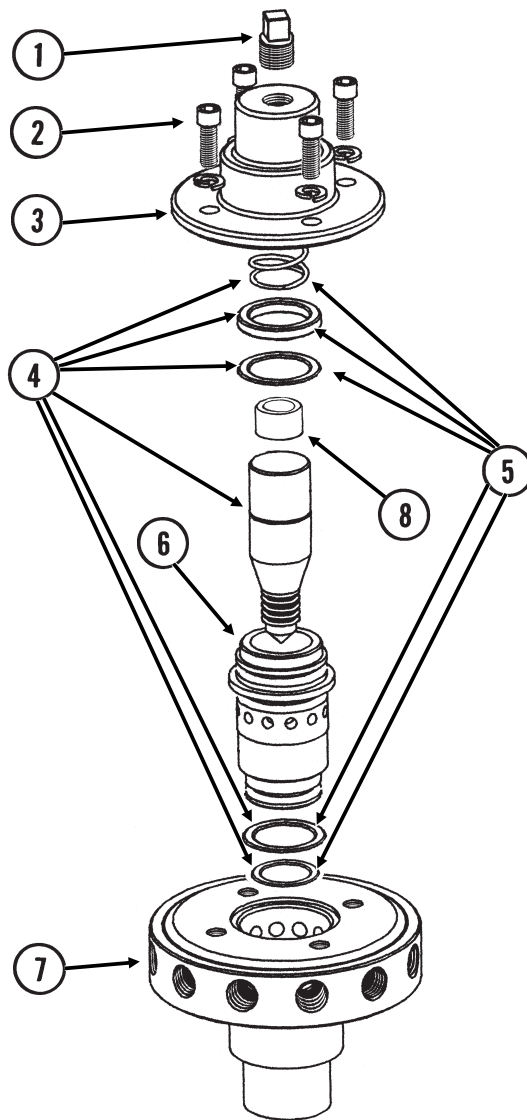Model FD-1200 Flow Divider, 12 Outlet $\frac{3}{4}$ " NPT

ITEM	PART NO.	QTY.	DESCRIPTION
1	GR1543	1	Vent Plug
2	GR1542	4	Hex Socket Head Screw, 1/4"-20 x 3/4"
	GR1541	4	Lock Washer, 1/4", Stainless Steel
3	GR1540	1	Cap
4	GR1544	1	Needle Assembly W/Seal Kit (Item 22)
5	GR1545	1	Seal Kit, Includes: (3) O-Rings, (1) Seal, (1) Spring
6	GR1535	1	Sleeve
7	GR1533	1	Body (12 Outlet)
8	GR1574	1	Sleeve, 1" O.D. x 1/2" Long, Stainless Steel
A	GA8931	1	Liquid Fertilizer Piston Pump Flow Divider Complete, 12 Outlet (Model FD-1200)


(IP1523)

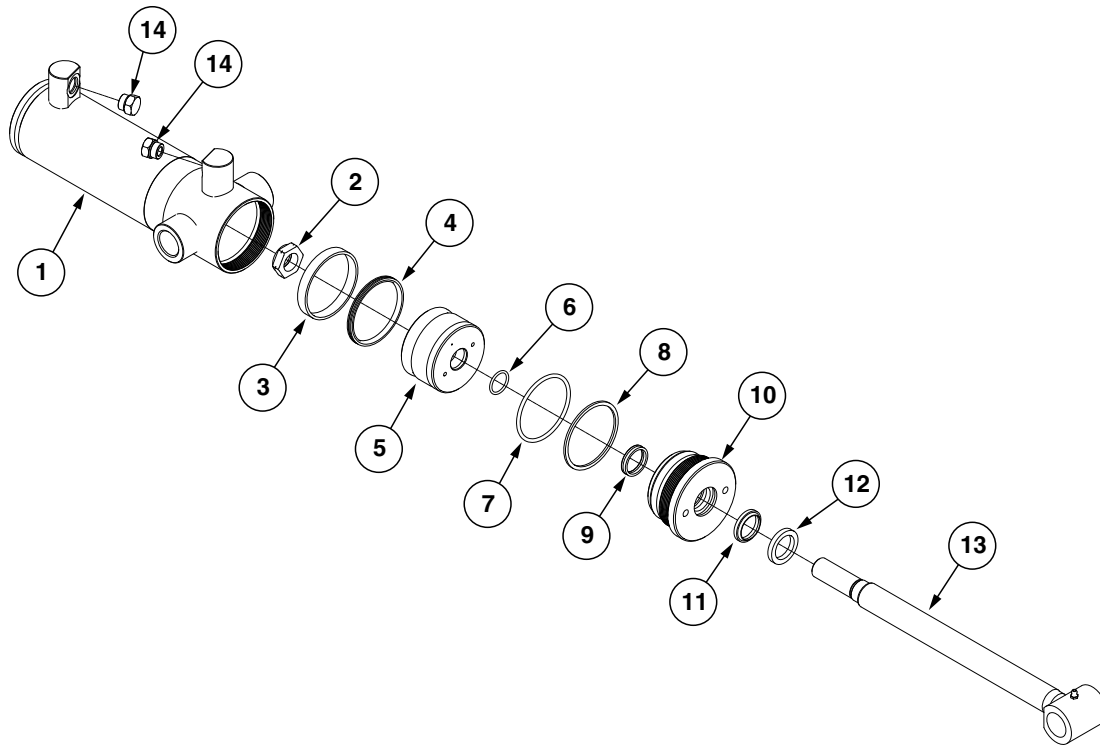

ITEM	PART NO.	QTY.	DESCRIPTION
1	A4295	1	Barrel
2	GD27235	1	Nylon Lock Nut, 1"-14, Grade 8
3	*D12056	1	Wear Ring
4	*D12280	1	T-Seal
5	GA21112	1	Piston
6	*D29649	1	O-Ring, No. 215
7	*D12231	1	O-Ring, No. 338
8	*D12232	1	BU Ring
9	*D12251	1	U-Cup
10	GD12507	1	Gland
11	*D12210	1	Wiper
12	GD12102	1	Ring
13	GA21106	1	Rod
14	G6408-08	2	Plug W/O-Ring, 3/4"-16 O-Ring
	GR1037	-	O-Ring
A	GA21111	-	Cylinder Complete, 3½" x 8" (<i>Part Number Stamped On Barrel</i>)
B	GR2228	-	Seal Kit, Includes: (1) Wiper, (3) O-Rings, (1) BU Ring, (1) T-Seal, (1) Wear Ring, (1) U-Cup

*Item is part of seal kit, item can not be purchased individually.


(IP1524)

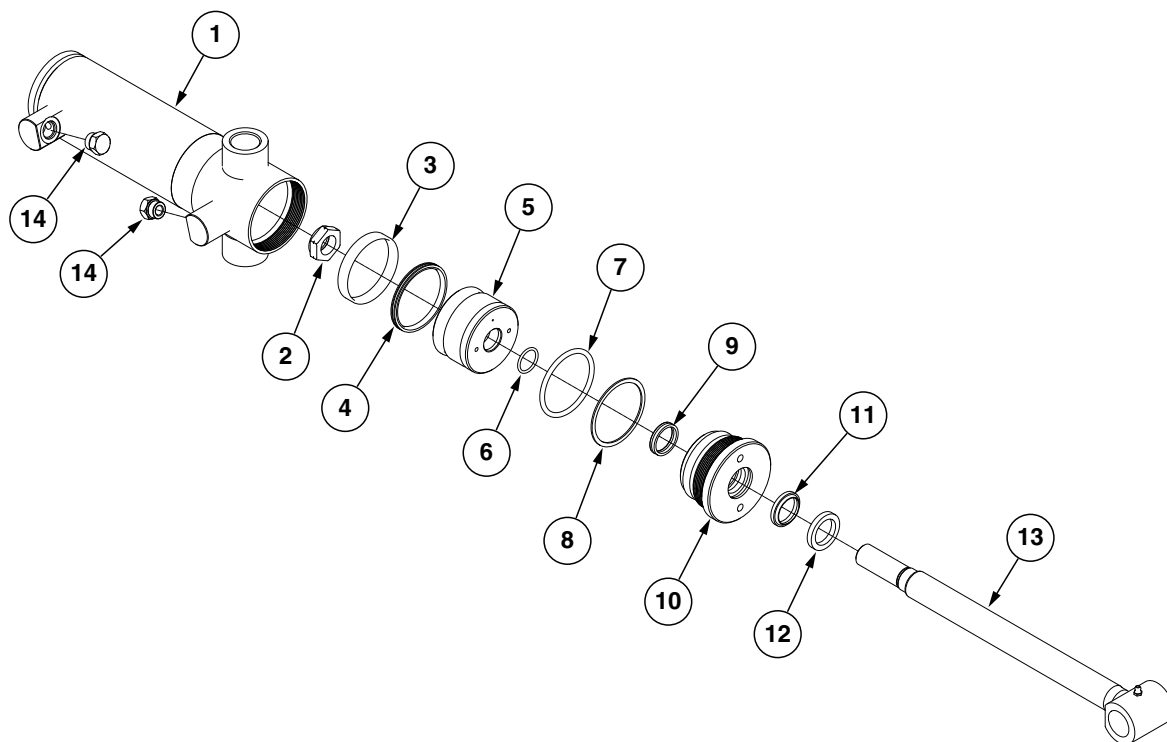

ITEM	PART NO.	QTY.	DESCRIPTION
1	A7538	1	Barrel
2	GD27235	1	Nylon Lock Nut, 1"-14, Grade 8
3	*D12038	1	Wear Ring
4	*D12279	1	T-Seal
5	GA21105	1	Piston
6	*D29649	1	O-Ring, No. 215
7	*D12227	1	O-Ring, No. 336
8	*D12228	1	Back-Up Ring
9	*D12251	1	U-Cup
10	GD12505	1	Gland
11	*D12210	1	Wiper
12	GD12102	1	Ring
13	GA21106	1	Rod
14	G6408-08 GR1037	2 -	Plug W/O-Ring, 3/4"-16 O-Ring O-Ring
A	GA21104	-	Cylinder Complete, 3 1/4" x 8" (<i>Part Number Stamped On Barrel</i>)
B	GR2225	-	Seal Kit, Includes: (1) Wiper, (1) U-Cup, (3) O-Rings, (1) BU Ring, (1) T-Seal, (1) Wear Ring


*Item is part of seal kit, item can not be purchased individually.

(IP1525)

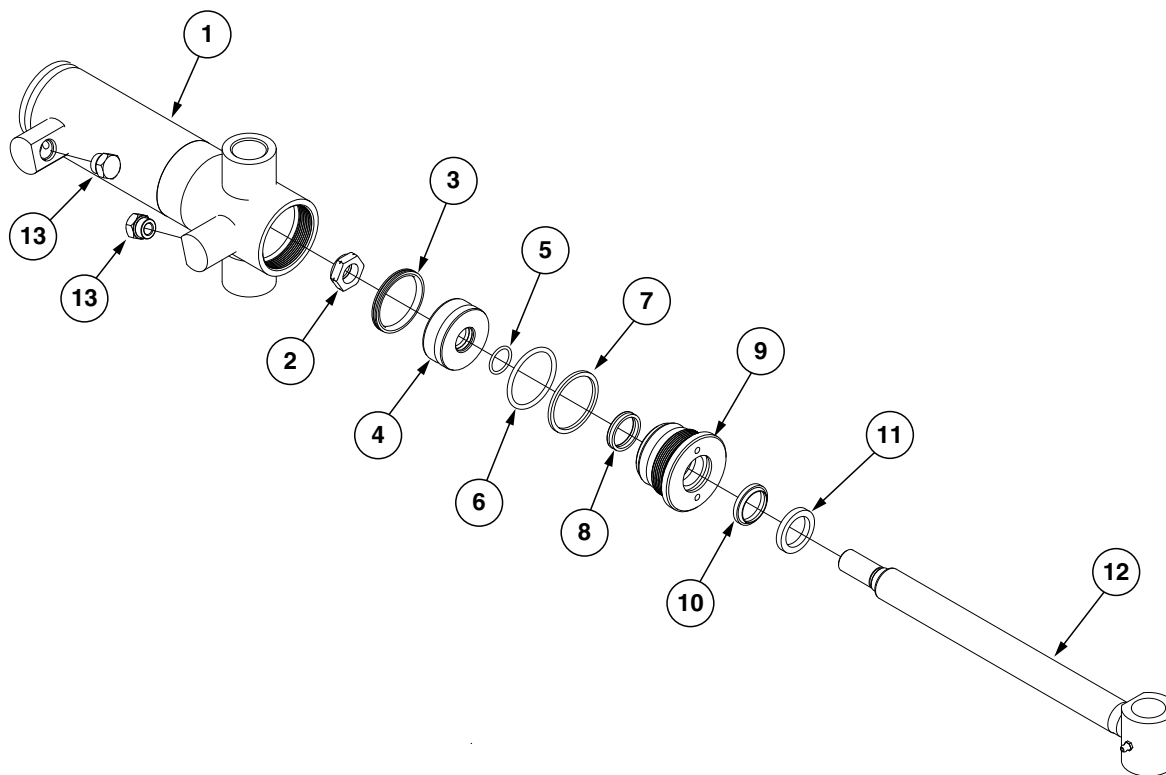

ITEM	PART NO.	QTY.	DESCRIPTION
1	A8827	1	Barrel
2	GD27234	1	Nylon Lock Nut, $\frac{7}{8}$ "-14, Grade 8
3	*D12275	1	T-Seal, 2½"
4	GD30401	1	Piston
5	*D30399	1	O-Ring, No. 119
6	*D12212	1	O-Ring, No. 330
7	*D12213	1	BU Ring
8	*D12251	1	U-Cup
9	GD11985	1	Gland
10	*D12210	1	Wiper
11	GD12102	1	Ring
12	GA21185	1	Rod
13	G6408-08	2	Plug W/O-Ring, $\frac{3}{4}$ "-16 O-Ring
	GR1037	-	O-Ring
A	GA21184	-	Cylinder Complete, 2½" x 8" (Part Number Stamped On Barrel)
B	GR2227	-	Seal Kit, Includes: (1) Wiper, (3) O-Rings, (1) BU Ring, (1) T-Seal, (1) U-Cup
*Item is part of seal kit, item can not be purchased individually.			


(IP1528)

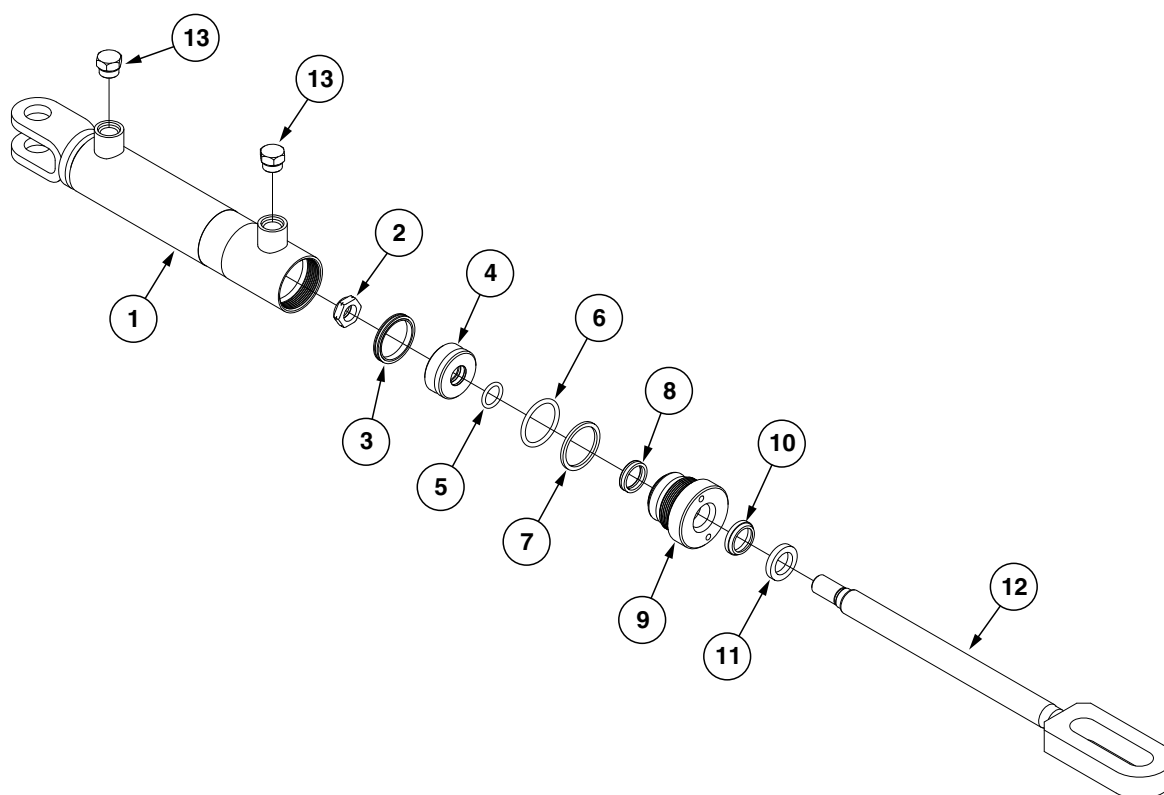

ITEM	PART NO.	QTY.	DESCRIPTION
1	A8775	1	Barrel
2	GD27233	1	Nylon Lock Nut, 3/4"-16, Grade 8
3	*D12277	1	T-Seal
4	GD29689	1	Piston
5	*D29692	1	O-Ring, No. 211
6	*D12235	1	O-Ring, No. 326
7	*D12236	1	Back-Up Ring
8	*D12256	1	U-Cup
9	GD12510	1	Gland
10	*D12233	1	Wiper Rod
11	GD12101	1	Ring
12	GA21168	1	Rod
13	G6408-08	2	Plug W/O-Ring, 3/4"-16 O-Ring
	GR1037	-	O-Ring
A	GA21167	-	Cylinder Complete, 2" x 8" (<i>Part Number Stamped On Barrel</i>)
B	GR2229	-	Seal Kit, Includes: (1) Wiper, (2) U-Cup, (3) O-Rings, (1) BU Ring, (1) T-Seal, (1) Instruction Sheet

*Item is part of seal kit, item can not be purchased individually.


(IP1527)

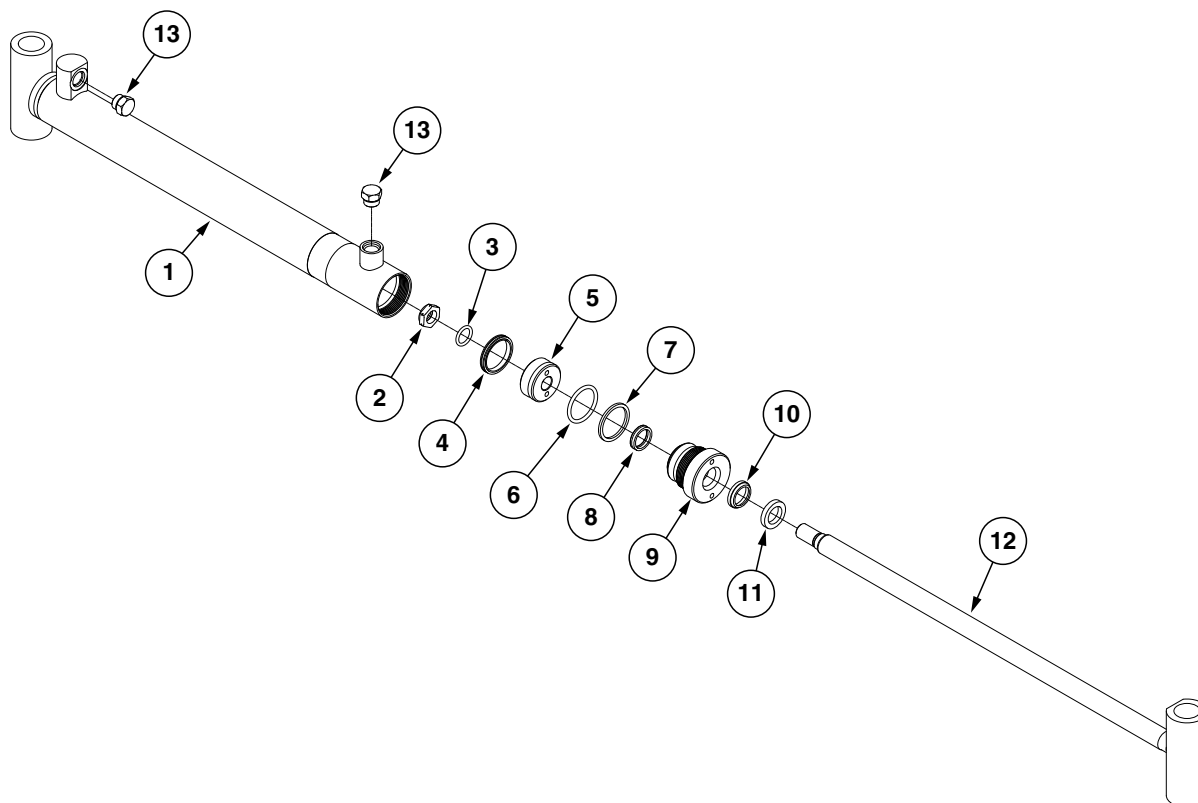

ITEM	PART NO.	QTY.	DESCRIPTION
1	A9442	1	Barrel
2	GD27233	1	Nylon Lock Nut, 3/4"-16, Grade 8
3	*D29692	1	O-Ring, No. 211
4	*D12277	1	T-Seal
5	GD29689	1	Piston
6	*D12235	1	O-Ring, No. 326
7	*D12236	1	Back-Up Ring
8	*D12256	1	U-Cup
9	GD12510	1	Gland
10	*D12233	1	Wiper Rod
11	GD12101	1	Ring
12	GA21159	1	Rod
13	G6408-08 GR1037	2 -	Plug W/O-Ring, 3/4"-16 O-Ring O-Ring
A	GA21158	-	Cylinder Complete, 2" x 20 1/16" (<i>Part Number Stamped On Barrel</i>)
B	GR2229	-	Seal Kit, Includes: (1) Wiper, (2) U-Cup, (3) O-Rings, (1) BU Ring, (1) T-Seal, (1) Instrction Sheet


*Item is part of seal kit, item can not be purchased individually.

(CYL33c)

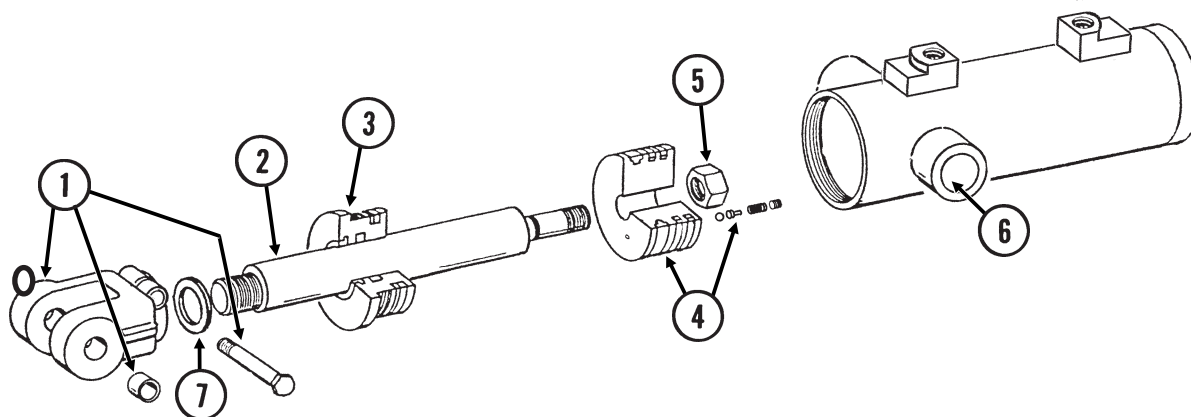



ITEM	PART NO.	QTY.	DESCRIPTION
1	GA8130	1	Clevis W/Bushings, Hex Head Cap Screw and Hex Nut
	GR1401	2	Bushing
	G10939	1	Hex Head Cap Screw, $\frac{3}{8}$ "-16 x 2 $\frac{1}{4}$ "
	G10101	1	Hex Nut, $\frac{3}{8}$ "-16
2	GD12513	1	Rod
3	GD11995	1	Gland
4	GA8924	1	Piston W/Rephasing Valve
	GR1169	-	Rephasing Valve Replacement Kit (Includes: Set Screw, Guide, 2 Springs and Ball)
5	GD27235	1	Nylon Lock Nut, 1"-14, Grade 8
6	A8923	1	Barrel
7	G10957	4	Steel Shim
A	GA8897	-	Cylinder Complete, 4 $\frac{1}{4}$ " x 4" (Part Number Stamped On Barrel)
B	GR1523	-	Seal Kit, Includes: (1) Wiper, (2) O-Rings, (1) BU Ring, (1) U-Cup, (1) Seal, (1) Expander, (2) Cast Iron Ring

VVB025/PHS035(PT11a)

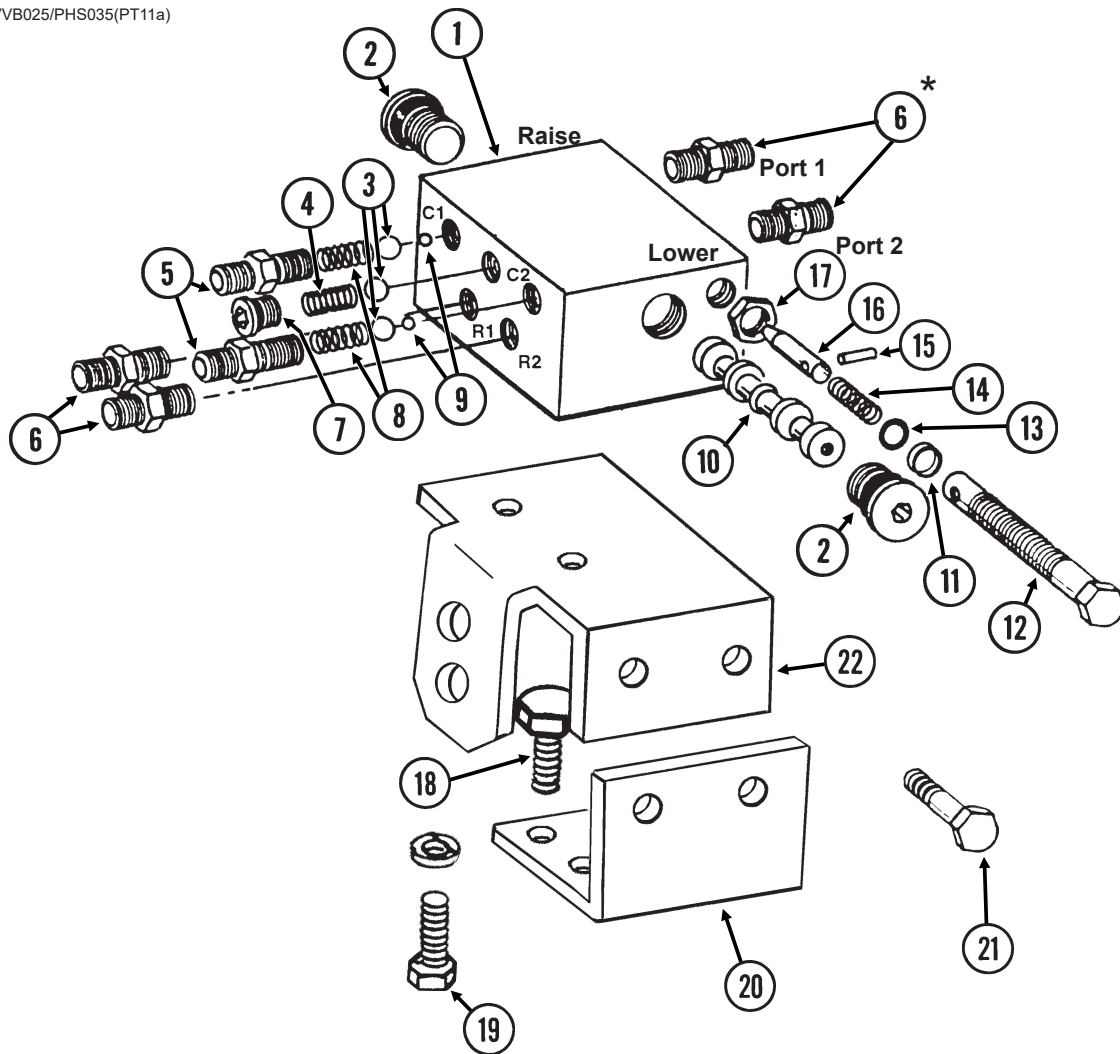



ITEM	PART NO.	QTY.	DESCRIPTION
1	---	-	Valve Body (Non-Stock Item)
2	GR1047	2	Hex Socket Plug W/O-Ring
	GR1037	-	O-Ring
3	GR1044	3	7/16" Check Ball
4	GR1033	1	Detent Spring
5	GR1032	2	Port Adapter W/O-Ring
	GR1045	-	O-Ring
6	*G6400-06	4	Connector W/O-Ring, 9/16"-18 Male 37° JIC To 9/16"-18 O-Ring
	GR1045	-	O-Ring
7	GR1034	1	Hex Socket Plug W/O-Ring
	GR1035	-	O-Ring
8	GR1036	2	Spring
9	GR1043	2	1/4" Steel Ball
10	---	-	Spool (Non-Stock Item)
11	GR1041	2	Teflon BU Ring
12	GR1042	2	Adjustment Screw
13	GR1040	2	O-Ring
14	GR1046	2	Compression Spring
15	GR1039	2	Spring Pin
16	GR1038	2	Needle
17	GR1048	2	Hex Jam Nut, 1/2"-20
18	G10001	2	Hex Head Cap Screw, 3/8"-16 x 1"
	G11387	2	Washer, 3/8" SAE
	G10229	2	Lock Washer, 3/8"
19	G10001	2	Hex Head Cap Screw, 3/8"-16 x 1"
	G10229	2	Lock Washer, 3/8"
20	GD10223	1	Mounting Angle
21	G10001	2	Hex Head Cap Screw, 3/8"-16 x 1"
	G11387	2	Washer, 3/8" SAE
	G10229	2	Lock Washer, 3/8"
	G10101	2	Hex Nut, 3/8"-16
22	GD10224	1	Valve Mounting Angle
A	GA5552	-	Valve Assembly Complete (Items 1-17)
B	GA5572	-	Flow Control Portion Only (Items 11-17)

*Not used on sizes with 3/8" hoses.

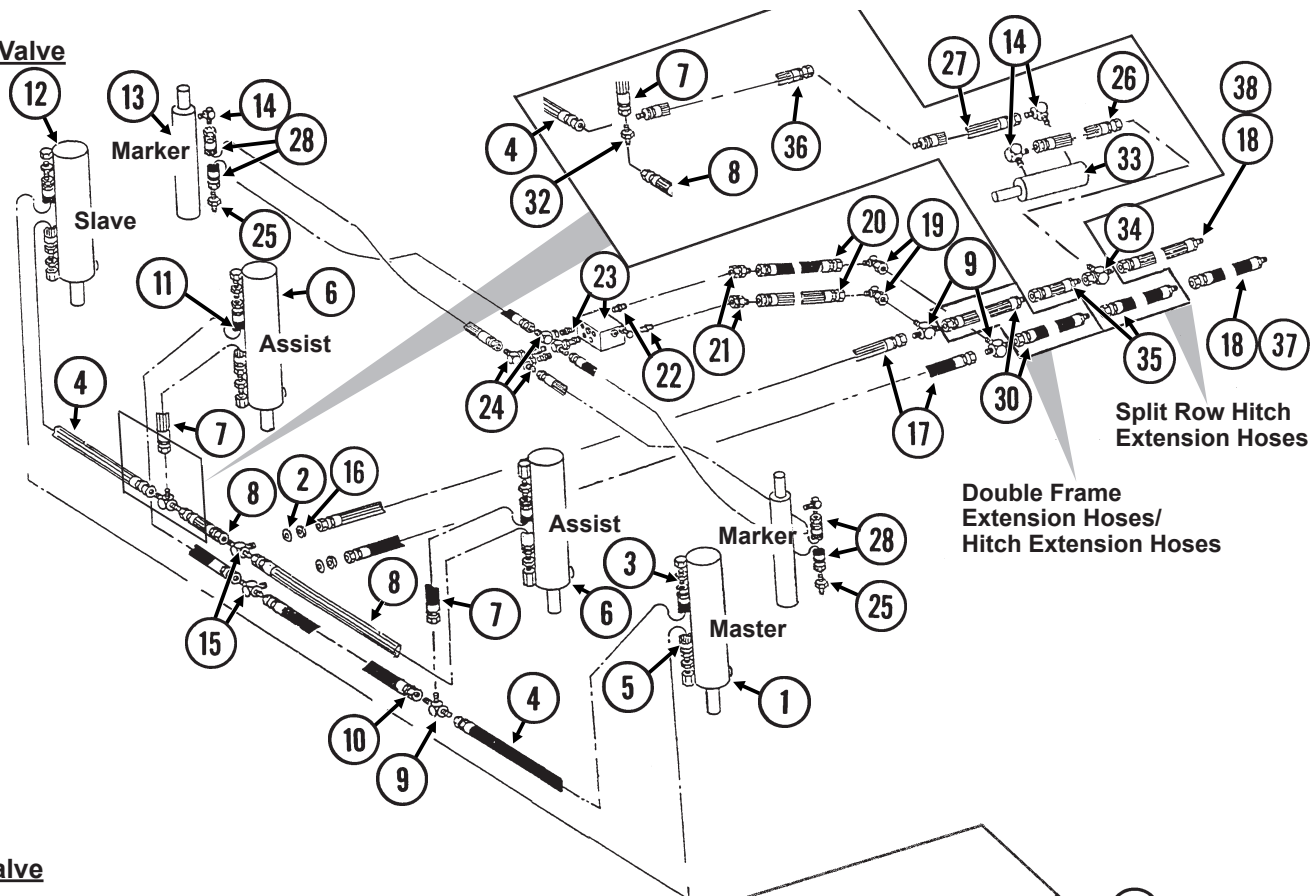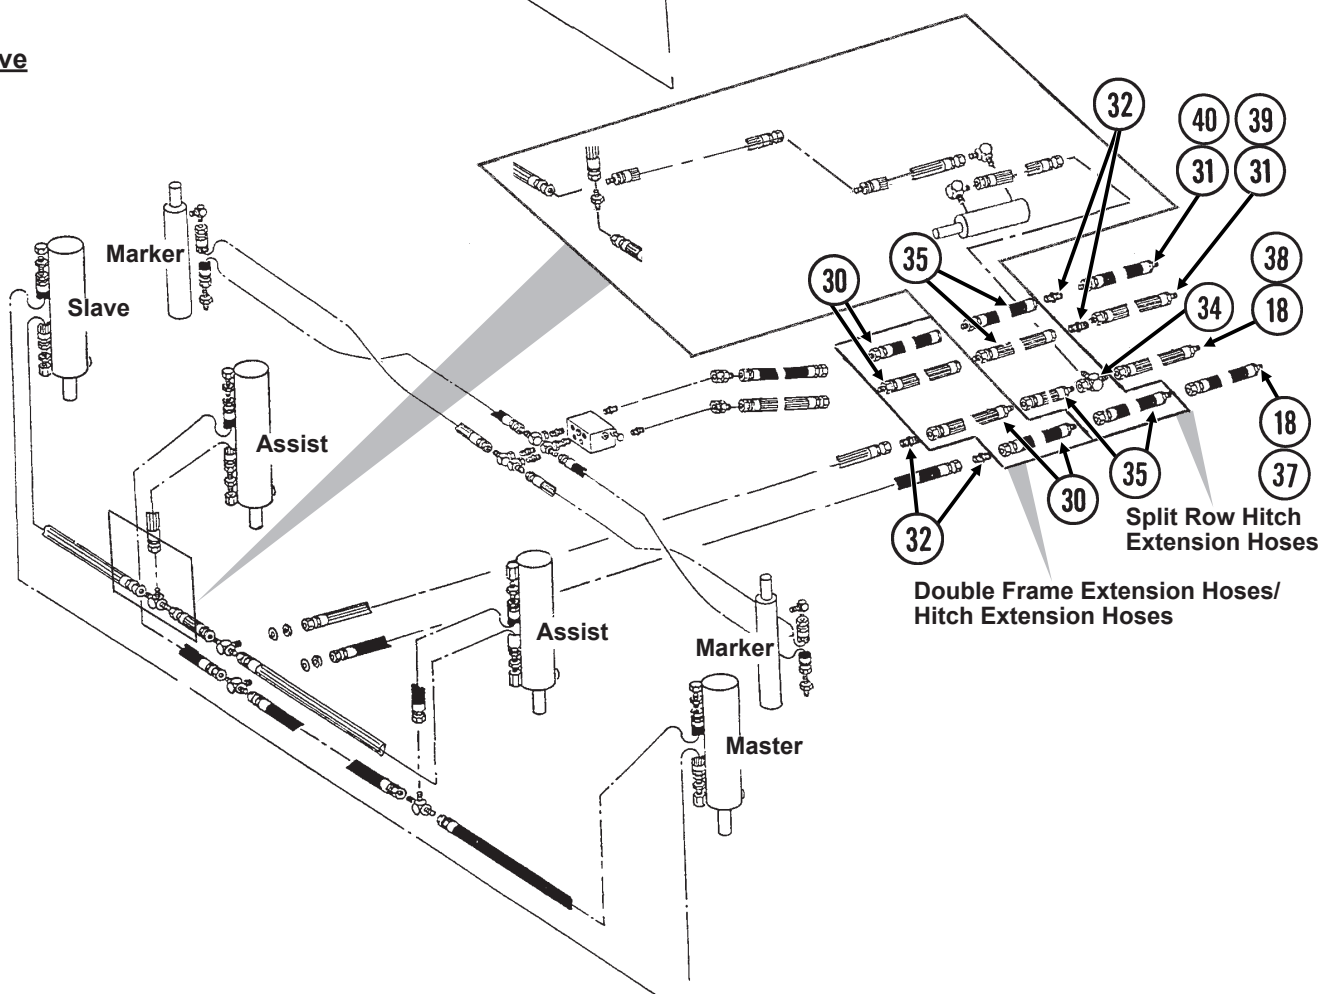Single ValveDual Valve

ITEM	PART NO.	QTY.	DESCRIPTION
1	---	-	See "Master Lift Cylinder" on page P122
2	G10215	2	Machine Bushing, 3/4", 14 Gauge
3	G6400-08 GR1037	8 -	Connector W/O-Ring, 3/4"-16 Male JIC To O-Ring
4	*A1018	2	Hose Assembly, 3/8" x 40"
5	*A1054	1	Hose Assembly, 3/8" x 204"
6	---	-	See "Lift Assist Cylinder, 6 Row and 8 Row" on page P124
7	*A1000	2	Hose Assembly, 3/8" x 15"
8	*A1055	1	Hose Assembly, 3/8" x 66"
9	G2603-08-08-06	2	Tee, 3/4"-16 Male JIC To 9/16"-18 JIC
10	*A1021	2	Hose Assembly, 3/8" x 56"
11	*A1055	1	Hose Assembly, 3/8" x 66"
12	---	-	See "Slave Lift Cylinder" on page P123
13	---	-	See "Row Marker Cylinder, 8 Row" on page P126
14	G6500-08-06 GR1037	2 -	Swivel Elbow, 90°, 3/4"-16 Male JIC To 9/16"-18 Female
15	G2703-08-08	2	Bulkhead Tee, 3/4"-16 Male JIC
16	G306-08	2	Lock Nut, 3/4"-16
17	*A1076	2	Hose Assembly, 3/8" x 30"
18	*A26936-125	2	Hose Assembly, 3/8" x 125" (08F-1/2M NPTF W/Ext, W/Tip)
19	G6500-08	2	Swivel Elbow, 90°, 3/4"-16 Male JIC To Female
20	*A1079	2	Hose Assembly, 3/8" x 24"
21	G6502-08	2	Swivel Elbow, 45°, 3/4"-16 Male JIC To Female
22	G6400-08-06 GR1045	2 -	Connector W/O-Ring, 3/4"-16 Male JIC To 9/16"-18 O-Ring
23	---	-	See "Row Marker Sequencing/Flow Control Valve" on page P128
24	G6500-06	2	Swivel Elbow, 90°, 3/4"-16 Male JIC To 9/16"-18 Female
25	G6500-08-06	2	Connector W/O-Ring, 3/4"-16 Male JIC To O-Ring
26	*A1076	1	Hose Assembly, 3/8" x 30", W/Split Row Package
27	*A3209	1	Hose Assembly, 3/8" x 170", W/Split Row Package
28	*A1182 *A1168	2 2	Hose Assembly, 1/4" x 30" Hose Assembly, 1/4" x 120"
29	---	-	---
30	*A3142 *A3147	- -	Hose Assembly, 3/8" x 30", W/Double Frame Package Hose Assembly, 3/8" x 24", W/Hitch Extensions
31	*A26939-56	2	Hose Assembly 3/8" x 56" (06F - 1/2M NPTF W/Ext W/Tip)
32	G2403-08	-	Union, 3/4"-16 Male JIC
33	---	-	See "Split Row Lift Cylinder" on page P127
34	G6602-08	1	Swivel Tee, 3/4"-16 JIC
35	*A3150	2-4	Hose Assembly, 3/8" x 56", W/Split Row Package
36	*A3142	1	Hose Assembly, 3/8" x 30", W/Split Row Package (Double Frame Only)
37	GA26924-01	-	Hose Label/Cover, Red (Extend)
38	GA26924-02	-	Hose Label/Cover, Red (Retract)
39	GA26924-03	-	Hose Label/Cover, Blue (Extend)
40	GA26924-04	-	Hose Label/Cover, Blue (Retract)


* Hydraulic hose is not stocked by Kinze Repair Parts.

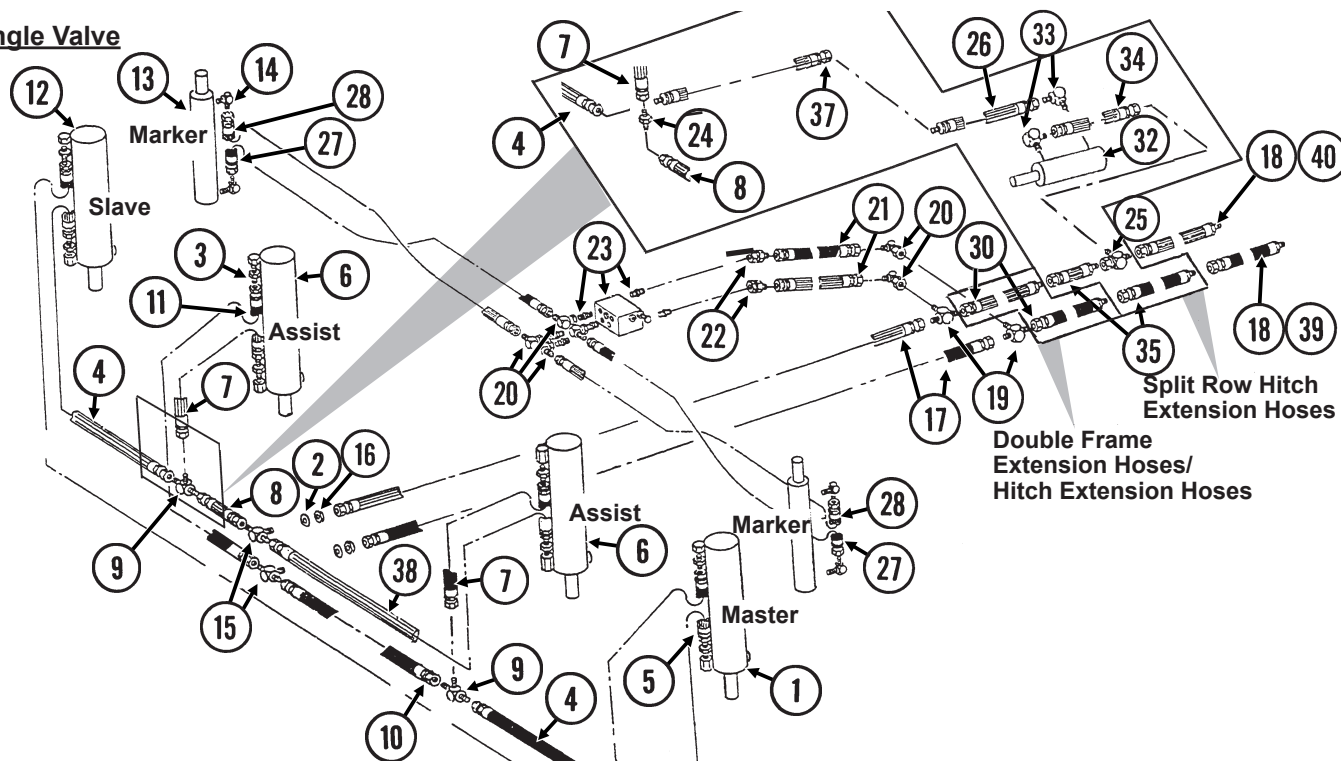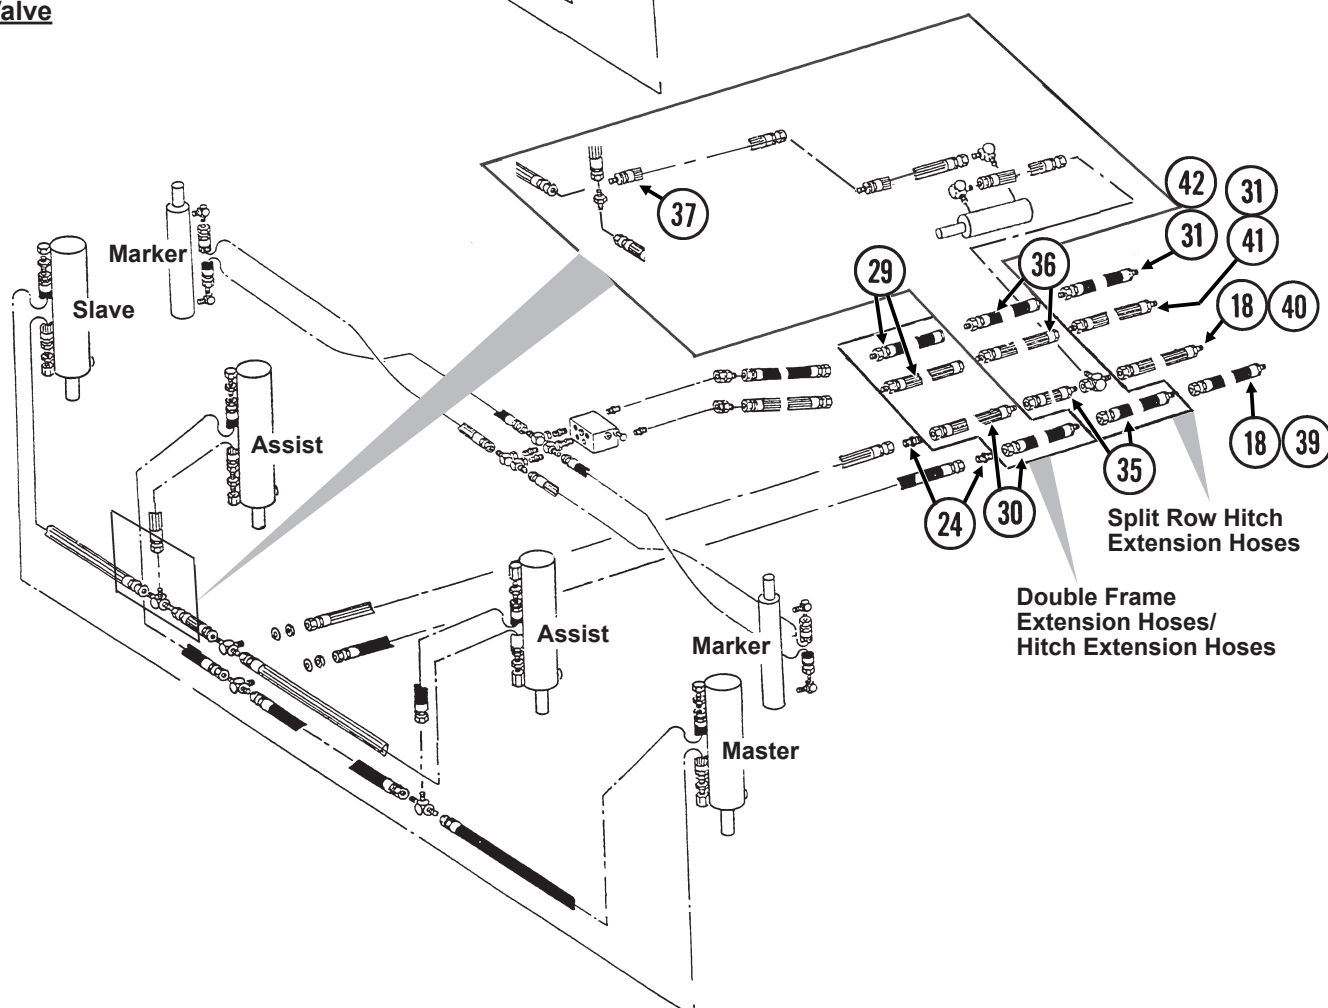Single ValveDual Valve

ITEM	PART NO.	QTY.	DESCRIPTION
1	---	-	See "Master Lift Cylinder" on page P122
2	G10215	2	Machine Bushing, 3/4", 14 Gauge
3	G6400-08 GR1037	8 -	Connector W/O-Ring, 3/4"-16 Male JIC To O-Ring O-Ring
4	*A1018	2	Hose Assembly, 3/8" x 40"
5	*A3115	1	Hose Assembly, 3/8" x 146"
6	---	-	See "Lift Assist Cylinder, 6 Row and 8 Row" on page P124
7	*A1000	2	Hose Assembly, 3/8" x 15"
8	*A3119	1	Hose Assembly, 3/8" x 36"
9	G2603-08	2	Tee, 3/4"-16 Male JIC
10	*A1086	1	Hose Assembly, 3/8" x 28"
11	*A1019	1	Hose Assembly, 3/8" x 44"
12	---	-	See "Slave Lift Cylinder" on page P123
13	---	-	See "Row Marker Cylinder, 8 Row" on page P126
14	G6801-06-08 GR1037	4 -	Elbow W/O-Ring, 90°, 9/16"-18 Male JIC To 3/4"-16 O-Ring O-Ring
15	G2703-08-08	2	Bulkhead Tee, 3/4"-16 Male JIC
16	G306-08	2	Lock Nut, 3/4"-16
17	*A1076	2	Hose Assembly, 3/8" x 30"
18	*A26936-125	2	Hose Assembly, 3/8" x 125" (08F-1/2M NPTF W/Ext, W/Tip)
19	G2603-08-08-06	2	Tee, 3/4"-16 Male JIC To 9/16"-18 JIC
20	G6500-06	2	Swivel Elbow, 90°, 9/16"-18 Male JIC To Female
21	*A1138	2	Hose Assembly, 1/4" x 29"
22	G6502-06	2	Swivel Elbow, 45°, 9/16"-18 Male JIC To Female
23	---	-	See "Row Marker Sequencing/Flow Control Valve" on page P128
24	G2403-08	1	Union, 3/4"-16 Male JIC
25	G6602-08	1	Swivel Tee, 3/4"-16 JIC
26	*A3208	1	Hose Assembly, 3/8" x 140", W/Split Row Package
27	*A1106	2	Hose Assembly, 1/4" x 125"
28	*A1168	2	Hose Assembly, 1/4" x 120"
29	*A1182 *A1177	- -	Hose Assembly, 1/4" x 30", W/Double Frame Package Hose Assembly, 1/4" x 24", W/Hitch Extensions
30	*A3142 *A3147	- -	Hose Assembly, 3/8" x 30", W/Double Frame Package Hose Assembly, 3/8" x 24", W/Hitch Extensions
31	*A26939-56	2	Hose Assembly, 3/8" x 56"
32	---	-	See "Split Row Lift Cylinder" on page P127
33	G6801-08 GR1037	2 -	Elbow W/O-Ring, 90°, 3/4"-16 Male JIC To O-Ring O-Ring
34	*A1076	1	Hose Assembly, 3/8" x 30", W/Split Row Package
35	*A3150	2	Hose Assembly, 3/8" x 56", W/Split Row Package
36	*A1179	2	Hose Assembly, 1/4" x 56", W/Split Row Package
37	*A3142	1	Hose Assembly, 3/8" x 30", W/Split Row Package (Double Frame Only)
38	*A3175	1	Hose Assembly, 3/8" x 38"
39	GA26924-01	-	Hose Label/Cover, Red (Extend)
40	GA26924-02	-	Hose Label/Cover, Red (Retract)
41	GA26924-03	-	Hose Label/Cover, Blue (Extend)
42	GA26924-04	-	Hose Label/Cover, Blue (Retract)


* Hydraulic hose is not stocked by Kinze Repair Parts.

(1K656)

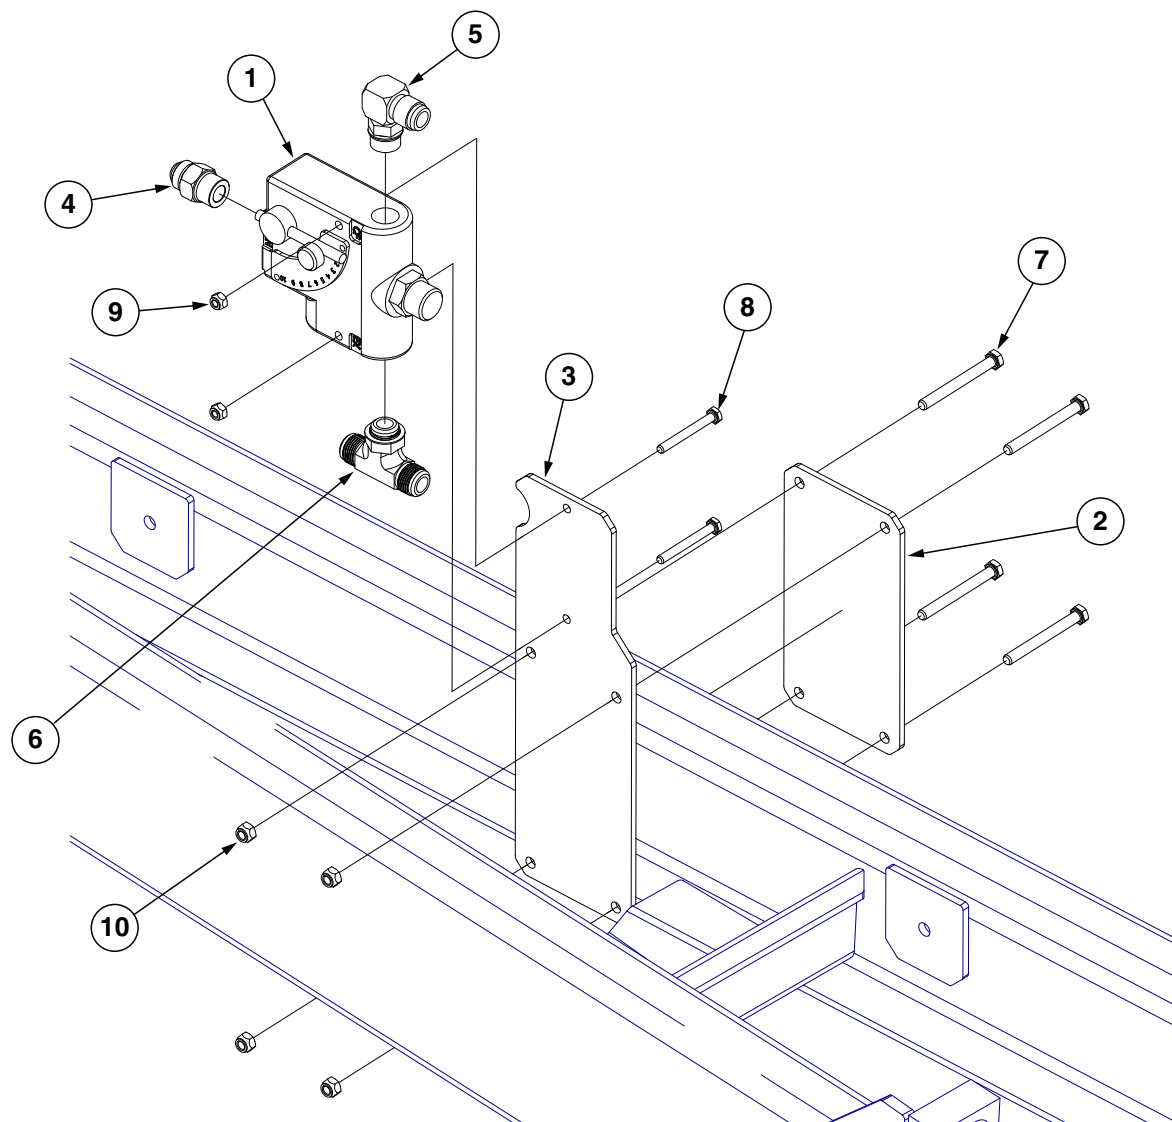


ITEM	PART NO.	QTY.	DESCRIPTION
1	GA10918	1	Flow Control Valve
2	GD29719	1	Bypass Valve Plate Mount, Back
3	GD29721	1	Bypass Valve Plate Mount, Front
4	G6400-10 GR1466	1	Connector W/O-Ring, $\frac{7}{8}$ "-14 Male JIC To O-Ring
5	G6801-10 GR1466	1	Elbow W/O-Ring, 90°, $\frac{7}{8}$ "-14 Male JIC To O-Ring
6	G6803-10	1	Tee W/O-Ring, $\frac{7}{8}$ "-14
7	G12003-80	4	Hex Head Cap Screw, M8-1.25 x 80
8	G12004-60	2	Hex Head Cap Screw, M6-1.0 x 60
9	G12101	4	Hex Lock Nut, M6-1.00
10	G12013	2	Hex Lock Nut, M8-1.25

(A15813)

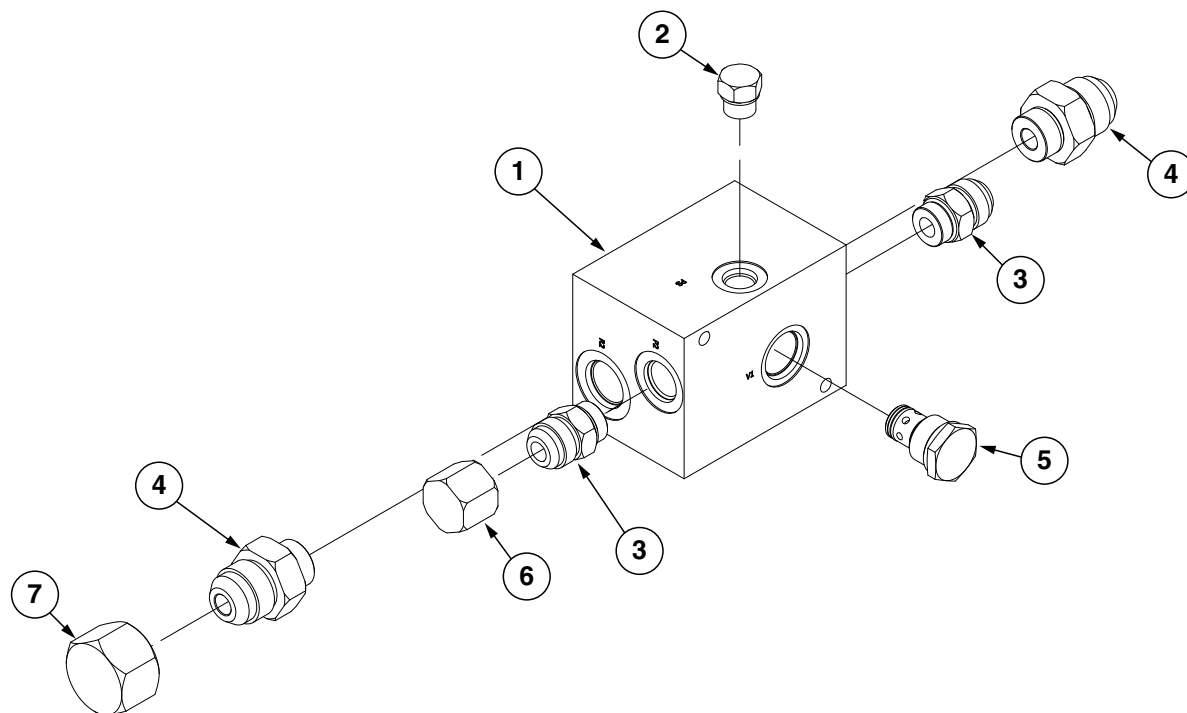

ITEM	PART NO.	QTY.	DESCRIPTION
1	GD19123	1	Vacuum Fan Override Valve Block
2	G6408-06	1	Plug W/O-Ring, $\frac{9}{16}$ "-18 O-Ring
	GR1045	-	O-Ring
3	G6400-10-08	2	Connector W/O-Ring, $\frac{7}{8}$ "-14 Male JIC To $\frac{3}{4}$ "-16 O-Ring
	GR1037	-	O-Ring
4	G6400-12-10	2	Connector W/O-Ring, $1\frac{1}{16}$ "-12 JIC To $\frac{7}{8}$ "-14 O-Ring
5	GA4293	1	Check Valve Cartridge
6	G304-C-10	1	Cap Nut, $\frac{7}{8}$ "-14
7	G304-C-12	1	Cap Nut, $1\frac{1}{16}$ "-12


(A21296_HYDRAULICS)

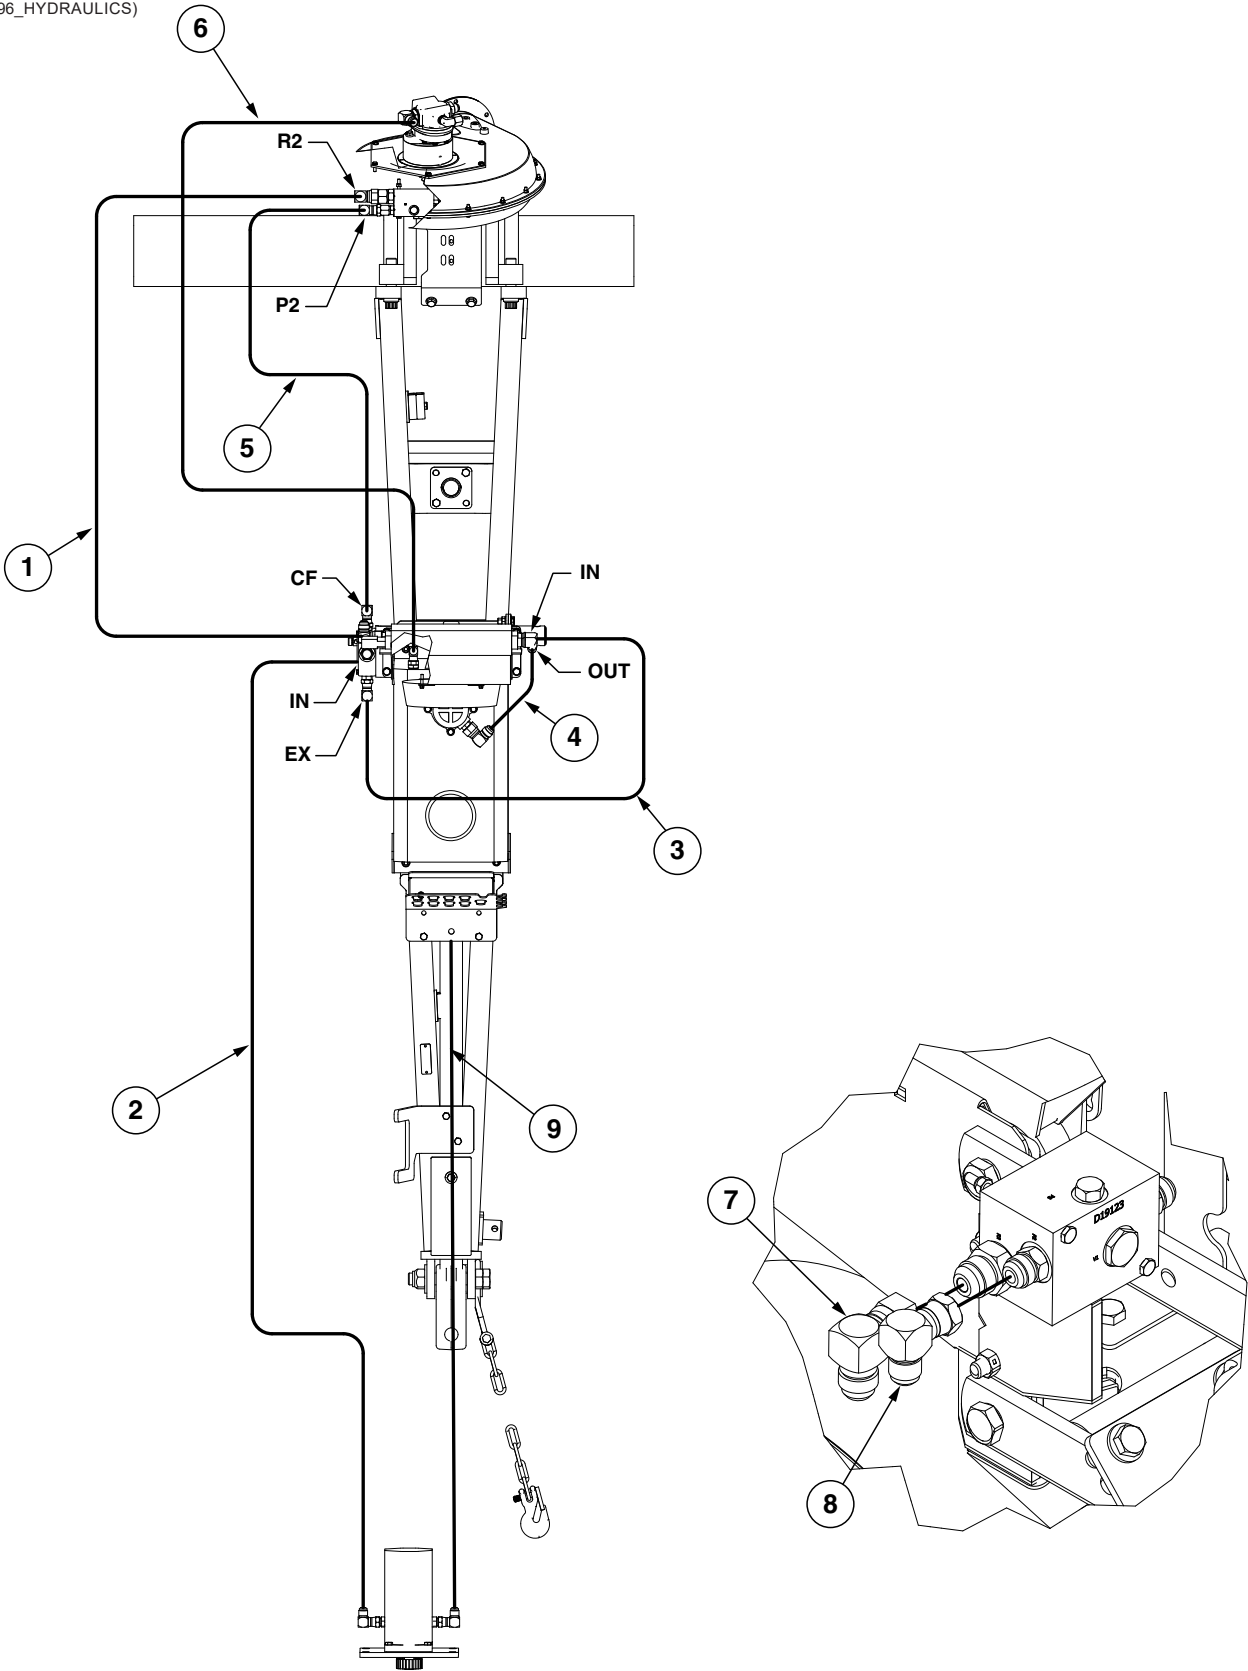

ITEM	PART NO.	QTY.	DESCRIPTION
1	*A22783-1575	1	Hose Assembly, 5/8" x 1575 mm (12F-12F)
2	*A22774-3250	1	Hose Assembly, 1/2" x 3250 mm (10F-10F)
3	*A22774-600	1	Hose Assembly, 1/2" x 600 mm (10F-10F)
4	*A22783-600	1	Hose Assembly, 5/8" x 600 mm (12F-12F)
5	*A22774-1480	1	Hose Assembly, 1/2" x 1480 mm (10F-10F)
6	*A22766-2550	1	Hose Assembly, 3/8" x 2550 mm (08F-08F)
7	G6500-12	1	Swivel Elbow, 90°, 1 1/16"-12 Male JIC To Female
8	G6500-10	1	Swivel Elbow, 90°, 7/8"-14 Male JIC To Female
9	*A12990-90	1	Hose Assembly, 1" x 90" (16F-16F)

* Hydraulic hose is not stocked by Kinze Repair Parts, but can be made available on a special order basis. Call for quote.




(A15815_hydraulics)



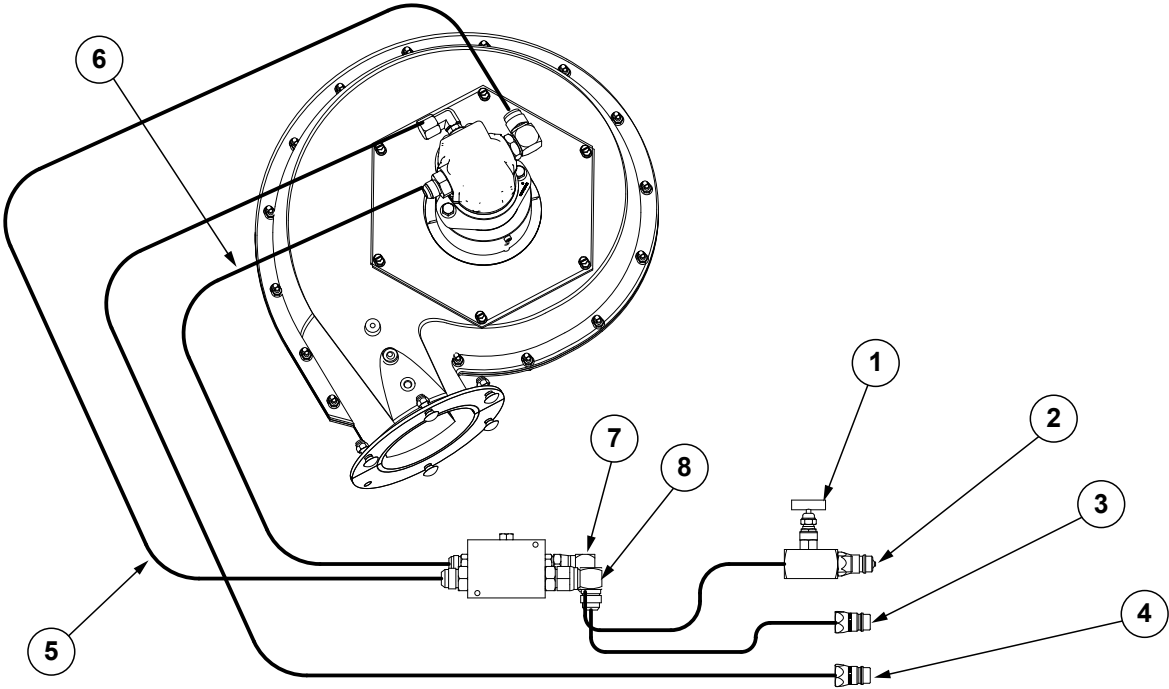



ITEM	PART NO.	QTY.	DESCRIPTION
1	GA11650	1	Needle Valve
2	*A18693-185	1	Hose Assembly, 1/2" x 185"
3	*A21548-185	1	Hose Assembly, 5/8" x 185"
4	*A26937-230	1	Hose Assembly, 3/8" x 230"
5	*A11498	1	Hose Assembly, 5/8" x 52' (12F-12F)
6	*A8262	1	Hose Assembly, 1/2" x 36"
7	G6500-10	1	Swivel Elbow, 90°, 7/8"-14 Male JIC To Female
8	G6500-12	1	Swivel Elbow, 90°, 1 1/16"-12 Male JIC To Female

* Hydraulic hose is not stocked by Kinze Repair Parts.

This page left blank intentionally.

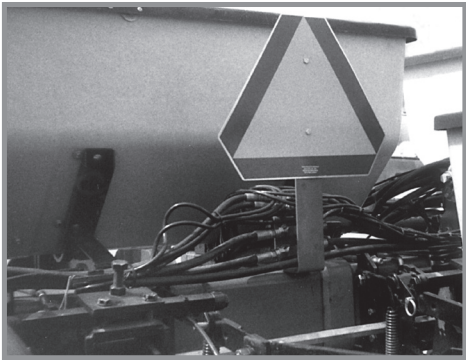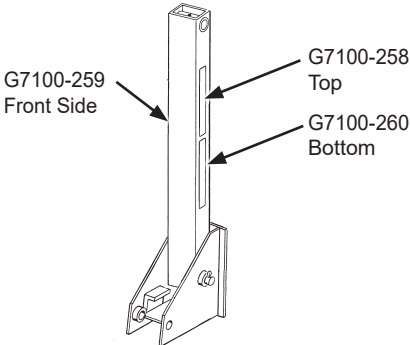	 Part No.: GD2199 Description: SMV Sign Quantity: 1
 Conventional Row Marker	 Part No.: G10366901 Description: Decal, Warning (2021 Production and on) Quantity: 1 (Per Row Marker Cylinder - Conventional) 4 (2 Per Row Marker)
	 Part No.: G7100-557 Description: Reflective Decal, Red, 2" x 9", Rectangular Quantity: 2 (1 Per Row Marker) (If Applicable) Part No.: G7100-558 Description: Reflective Decal, Amber, 2" x 9", Rectangular Quantity: 2 (1 Per Row Marker) Part No.: G7100-559 Description: Reflective Decal, Orange, 2" x 9", Rectangular Quantity: 2 (2 Per Row Marker)

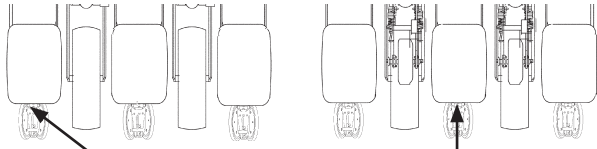
 Two diagrams at the top show the layout of hopper support units on a planter. Arrows point to the locations for reflective decals. Below are four photographs showing the installation of specific decals: G7100-261: Red reflective decal on the hopper support of the outside row unit. G7100-263: Orange reflective decal on the hopper support of the second row unit. G7100-258: Red reflective decal on the granular chemical hopper panel extension of the outside row unit. G7100-260: Orange reflective decal on the granular chemical hopper panel extension of the second row unit. NOTE: Exceptions to above are 8 Row planters. Red reflective decals are used on 1, 3, 6, and 8 row units. Orange reflective decals are used on 2, 4, 5, and 7 row units. (If Applicable)	 Part No.: G7100-261 Description: Reflective Decal, Red, 1¼" x 9", Die-Cut Quantity: 2 (One per row unit located on the hopper support on the outside row unit on each end of the planter) (if applicable) Part No.: G7100-263 Description: Reflective Decal, Orange, 1¼" x 9", Die-Cut Quantity: 2 (One per row unit located on the hopper support on the second row unit in on each end of the planter) (if applicable) Part No.: G7100-557 Description: Reflective Decal, Red, 2" x 9", Rectangular Quantity: 2 (One per row unit located on the granular chemical hopper panel extension on the outside row unit on each end of the planter) (if applicable) Part No.: G7100-559 Description: Reflective Decal, Orange, 2" x 9", Rectangular Quantity: 2 (One per row unit located on the granular chemical hopper panel extension on the second row unit in on each end of the planter) (if applicable)
 A photograph showing a blue metal component of a planter. A white arrow points to a warning decal (G10367001) located near a red handle and a chain.	 Part No.: G10367001 Description: Decal, Warning (2021 Production and on) Quantity: 1

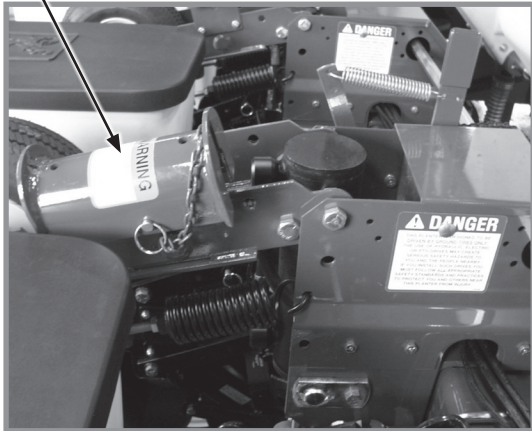

Part No.: G10367401

Description: Decal, Crush Warning (2021 Production and on)


Quantity: 1 (Per Contact Wheel Assembly)



Part No.: G10366801

Description: Decal, Warning (2021 Production and on)

Quantity: 1 (Per Contact Wheel Assembly)

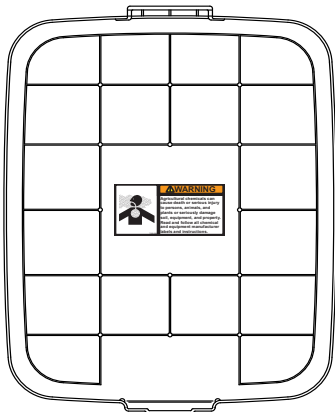

Part No.: G10367601

Description: Decal, Chemical Warning (2021 Production and on)



Quantity: 1 (1 Per Row Unit - Located On Underside Of Granular Chemical Hopper Lid)






Part No.: G10371901



Description: Decal, Lifting Caution (2021 Production and on)

Quantity: 1 (Located On Push Row Unit Lift Lever)

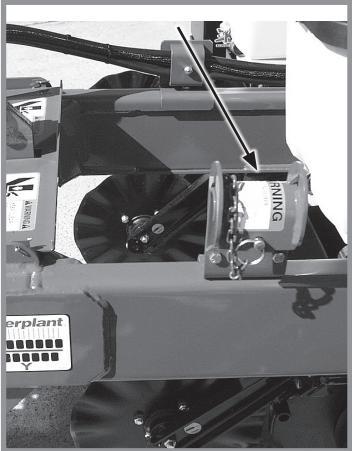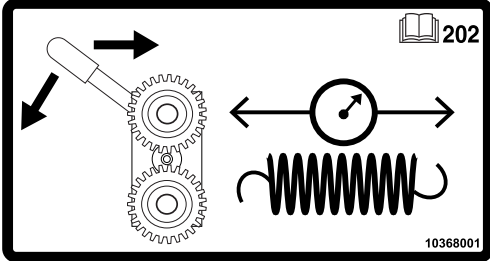	 Part No.: G10367401 Description: Decal, Crush Warning (2021 Production and on) Quantity: 1 (Per Contact Wheel Assembly)
	Part No.: GD1162 Description: Tie Strap, 28" Part No.: GD1512 Description: Tie Strap, 7½" Part No.: GD2117 Description: Tie Strap, 14½" Part No.: GD2984 Description: Tie Strap, 34"
	Part No.: G10368001 Description: Decal, Spring Tension Release Quantity: -
Double Frame®	Part No.: G7100-60 Description: Decal, Double Frame Quantity: 1
	Part No.: G10074401 Description: Decal, 3005 Quantity: 2 (1 On Each Side Of Hitch)
	Part No.: G10367201 Description: Decal, Warning (2021 Production and on) Quantity: 1

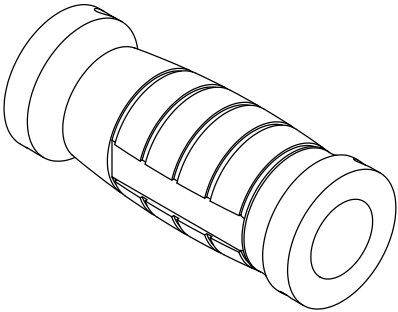	Part No.: GA26924-01 Description: Hose Label Cover, Red, Extend Part No.: GA26924-02 Description: Hose Label Cover, Red, Retract Part No.: GA26924-03 Description: Hose Label Cover, Blue, Extend Part No.: GA26924-04 Description: Hose Label Cover, Blue, Retract Part No.: GA26924-05 Description: Hose Label Cover, Green, Extend Part No.: GA26924-06 Description: Hose Label Cover, Green, Retract Part No.: GA26924-07 Description: Hose Label Cover, Yellow, Extend Part No.: GA26924-08 Description: Hose Label Cover, Yellow, Retract Part No.: GA26924-09 Description: Hose Label Cover, White, Extend Part No.: GA26924-10 Description: Hose Label Cover, White, Retract Part No.: GA26924-11 Description: Hose Label Cover, Orange, Retract
	Part No.: G10368101 Description: Decal, Transmission (2021 Production and on) Quantity: 1
	Part No.: G10368201 Description: Decal, Oil/Grease Daily (2021 Production and on) Quantity: -
	Part No.: G10371501 Description: Decal, Oil/Grease Weekly Quantity: -

	Part No.: GR2127MPP Description: Blue Paint, Twelve Aerosol Cans
	Part No.: GR0146MPP Description: Powdered Graphite, Twenty-Four 1 Pound Containers
	Part No.: GR1570MPP Description: Talc Lubricant, Four 8 Pound Containers
	Part No.: GR1842MPP Description: Graphite Lubricant, Four 5 Pound Containers
	Part No.: GR2240MPP Description: Talc/Graphite Blend (80 Talc/20 Graphite), Four 8 Pound Containers
	Part No.: GR2241MPP Description: Dispensing Cap, 10/Package

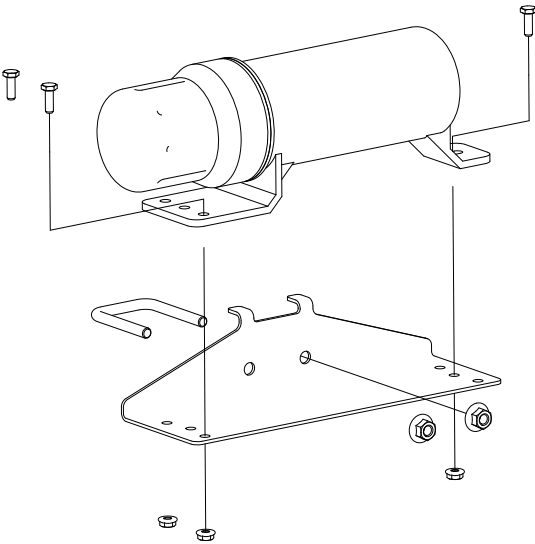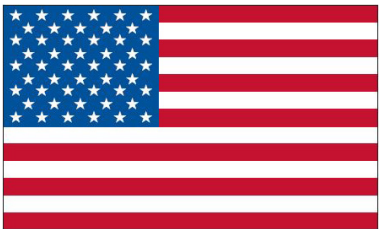	Part No.: GM0309-01 GM0309-01-RUS (Russian) GM0309-01-UKR (Ukrainian) GM0309-01-BGR (Bulgarian) Description: Operator Manual, Model 3005 Part No.: GM0309-02 Description: Parts Manual, Model 3005 Part No.: GPR1094 Description: Binder (Contact Kinze Parts To Order)
	Part No.: GA15422 Description: Operator's Manual Canister Quantity: 1 Part No.: GD22685 Description: Manual Canister Bracket Quantity: 1 Part No.: GD22692 Description: U-Bolt, 1$\frac{1}{4}$" x 1$\frac{3}{4}$" x $\frac{3}{8}$"-16 Quantity: 1 Part No.: G11091 Description: Serrated Flange Nut, $\frac{3}{8}$"-16 Quantity: 2 Part No.: G11166 Description: Hex Socket Flange Cap Screw, $\frac{1}{4}$"-20 x $\frac{3}{4}$" Quantity: 3 Part No.: G10621 Description: Serrated Flange Nut, $\frac{1}{4}$"-20 Quantity: 3
	Part No.: G7100-484 Description: Decal, American Flag

This page left blank intentionally.

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
*A1000.....	P131	A26287	P23	G1K322.....	P81	G4301-04.....	P115
*A1000.....	P133	*A26936-125	P131	G1K331.....	P39	G4301-07.....	P109
*A1018.....	P131	*A26936-125	P133	G1K345.....	P11	G4602-01.....	P107
*A1018.....	P133	*A26939-56	P131	G1K362.....	P82	G4602-21.....	P109
*A1019.....	P133	*A26939-56	P133	G1K363.....	P82	G6325X.....	P5
*A1021.....	P131	*D12038.....	P123	G1K378.....	P68	G6400-08.....	P131
*A1054.....	P131	*D12056.....	P122	G1K378.....	P116	G6400-08.....	P133
*A1055.....	P131	*D12210.....	P122	G1K534.....	P35	G6400-08-06	P131
*A1055.....	P131	*D12210.....	P123	G1K535.....	P35	G6408-06.....	P135
*A1076.....	P131	*D12210.....	P124	G1K758.....	P5	G6408-08.....	P122
*A1076.....	P131	*D12212.....	P124	G1K759.....	P35	G6408-08.....	P123
*A1076.....	P133	*D12213.....	P124	G306-08.....	P131	G6408-08.....	P124
*A1076.....	P133	*D12227.....	P123	G306-08.....	P133	G6408-08.....	P125
*A1079.....	P131	*D12228.....	P123	G2100-03.....	P65	G6408-08.....	P126
*A1086.....	P133	*D12231.....	P122	G2100-03.....	P68	G6500-06.....	P131
*A1106.....	P133	*D12232.....	P122	G2100-03.....	P111	G6500-06.....	P133
*A1138.....	P133	*D12233.....	P125	G2100-03	P115	G6500-08.....	P131
*A1168.....	P131	*D12233.....	P126	G2403-08.....	P131	G6500-08-06	P131
*A1168.....	P133	*D12235.....	P125	G2403-08.....	P133	G6500-08-06	P131
*A1177.....	P133	*D12235.....	P126	G2603-08.....	P133	G6502-06.....	P133
*A1179.....	P133	*D12236.....	P125	G2603-08-08-06	P131	G6502-08.....	P131
*A1182.....	P131	*D12236.....	P126	G2603-08-08-06	P133	G6602-08.....	P131
*A1182.....	P133	*D12251.....	P122	G2703-08-08	P131	G6602-08.....	P133
*A3115.....	P133	*D12251.....	P123	G2703-08-08	P133	G6795X.....	P93
*A3119.....	P133	*D12251.....	P124	G3303-16.....	P3	G6801-06-08	P133
*A3142.....	P131	*D12256.....	P125	G3303-96.....	P35	G6801-08.....	P133
*A3142.....	P131	*D12256.....	P126	G3303-98.....	P3	G6801-10-12	P55
*A3142.....	P133	*D12275.....	P124	G3303-108.....	P3	G7100-60.....	P143
*A3142.....	P133	*D12277.....	P125	G3303-108.....	P23	G7100-260.....	P140
*A3147.....	P131	*D12277.....	P126	G3303-114.....	P23	G7100-261.....	P141
*A3147.....	P133	*D12279.....	P123	G3303-114.....	P25	G7100-263.....	P141
*A3150.....	P131	*D12280.....	P122	G3310-80.....	P68	G7100-484.....	P146
*A3150.....	P133	*D29649.....	P122	G3310-92.....	P67	G7100-557.....	P140
*A3175.....	P133	*D29649.....	P123	G3310-98.....	P95	G7100-557.....	P141
*A3208.....	P133	*D29692.....	P125	G3310-98.....	P100	G7100-558.....	P140
*A3209.....	P131	*D29692.....	P126	G3310-100.....	P67	G7100-559.....	P140
A4295	P122	*D30399.....	P124	G3310-126.....	P111	G7100-559.....	P141
A7370	P65	G1K248	P79	G3310-126.....	P115	G7566X.....	P26
A7538	P123	G1K248	P82	G3310-132.....	P65	G8647X.....	P81
A8013	P61	G1K252.....	P79	G3310-138.....	P39	G9897X.....	P21
A8015	P61	G1K252.....	P82	G3310-252.....	P39	G9903X.....	P21
A8018	P61	G1K253.....	P65	G3324-01.....	P77	G9948X.....	P60
A8020	P61	G1K267.....	P81	G3400-01.....	P65	G9948X.....	P77
A8775	P125	G1K268.....	P81	G3400-01.....	P68	G10001	P11
A8827	P124	G1K269.....	P39	G3400-01.....	P111	G10001	P39
A8923	P127	G1K269.....	P69	G3400-01.....	P115	G10001	P41
A9442	P126	G1K269.....	P116	G4100-02.....	P60	G10001	P41
*A18693-185	P138	G1K296.....	P9	G4200-02.....	P107	G10001	P41
*A22774-3250	P51	G1K320.....	P79	G4200-03.....	P107	G10001	P81
*A22774-3250	P137	G1K320.....	P81	G4200-03.....	P109	G10001	P86
*A22783-1575	P51	G1K321.....	P79	G4205-11.....	P113	G10002	P7
*A22783-1575	P137	G1K321.....	P81	G4301-03.....	P115	G10002	P24

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
G10002	P89	G10019	P85	G10101	P11	G10104	P87
G10003	P3	G10020	P17	G10101	P26	G10104	P93
G10003	P57	G10021	P17	G10101	P39	G10104	P97
G10003	P71	G10022	P17	G10101	P41	G10104	P107
G10003	P111	G10023	P24	G10101	P42	G10104	P109
G10003	P115	G10023	P79	G10101	P81	G10105	P86
G10003	P119	G10026	P63	G10101	P85	G10105	P107
G10004	P5	G10033	P29	G10101	P87	G10105	P109
G10004	P31	G10033	P67	G10101	P111	G10106	P67
G10004	P35	G10033	P95	G10101	P115	G10106	P97
G10004	P65	G10035	P93	G10101	P115	G10106	P97
G10004	P65	G10036	P27	G10101	P119	G10106	P97
G10004	P68	G10037	P67	G10101	P127	G10106	P97
G10004	P87	G10037	P97	G10102	P29	G10106	P111
G10004	P107	G10038	P68	G10102	P29	G10106	P115
G10004	P107	G10039	P57	G10102	P39	G10107	P11
G10004	P109	G10039	P79	G10102	P39	G10107	P27
G10004	P111	G10039	P87	G10102	P39	G10107	P56
G10004	P115	G10039	P113	G10102	P39	G10107	P61
G10005	P7	G10045	P29	G10102	P60	G10107	P65
G10005	P61	G10045	P75	G10102	P67	G10107	P65
G10005	P65	G10045	P85	G10102	P67	G10107	P77
G10006	P29	G10046	P85	G10102	P67	G10107	P85
G10006	P56	G10046	P89	G10102	P67	G10107	P89
G10006	P63	G10047	P3	G10102	P68	G10107	P91
G10007	P26	G10047	P77	G10102	P68	G10107	P103
G10007	P77	G10047	P89	G10102	P71	G10108	P3
G10007	P86	G10047	P95	G10102	P73	G10108	P3
G10007	P107	G10047	P115	G10102	P75	G10108	P13
G10007	P109	G10047-	P68	G10102	P75	G10108	P14
G10008	P71	G10048	P61	G10102	P79	G10108	P23
G10010	P9	G10048	P61	G10102	P79	G10108	P35
G10010	P31	G10048	P61	G10102	P85	G10108	P41
G10010	P92	G10049	P87	G10102	P89	G10108	P42
G10011	P89	G10053	P63	G10102	P93	G10108	P61
G10013	P11	G10053	P67	G10102	P93	G10108	P61
G10014	P3	G10053	P67	G10102	P95	G10108	P61
G10014	P9	G10053	P95	G10102	P97	G10108	P61
G10016	P56	G10055	P65	G10102	P100	G10108	P65
G10016	P58	G10061	P3	G10102	P107	G10108	P71
G10016	P87	G10061	P13	G10102	P109	G10108	P76
G10016	P95	G10061	P61	G10102	P111	G10108	P77
G10016	P100	G10064	P11	G10102	P113	G10108	P82
G10017	P61	G10064	P64	G10102	P115	G10108	P86
G10017	P68	G10064	P65	G10103	P65	G10108	P87
G10017	P68	G10064	P79	G10104	P5	G10108	P89
G10017	P89	G10064	P113	G10104	P26	G10108	P89
G10017	P100	G10071	P3	G10104	P35	G10108	P91
G10017	P111	G10071	P63	G10104	P61	G10108	P119
G10017	P113	G10096	P107	G10104	P61	G10109	P11
G10017	P115	G10096	P109	G10104	P63	G10109	P29
G10018	P76	G10100	P87	G10104	P67	G10109	P31

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
G10109	P73	G10177	P97	G10229	P24	G10233	P92
G10109	P85	G10187	P71	G10229	P26	G10233	P95
G10109	P91	G10201	P14	G10229	P31	G10233	P98
G10110	P23	G10201	P23	G10229	P39	G10233	P98
G10110	P75	G10201	P42	G10229	P41	G10233	P100
G10110	P79	G10201	P97	G10229	P41	G10233	P111
G10110	P79	G10201	P97	G10229	P65	G10233	P115
G10111	P11	G10207	P3	G10229	P68	G10235	P65
G10111	P27	G10207	P37	G10229	P68	G10237	P87
G10111	P29	G10209	P113	G10229	P81	G10243	P47
G10111	P29	G10210	P77	G10229	P85	G10243	P105
G10111	P41	G10215	P131	G10229	P87	G10278	P109
G10111	P41	G10215	P133	G10229	P87	G10278	P111
G10111	P56	G10216	P9	G10229	P95	G10278	P113
G10111	P57	G10216	P100	G10229	P111	G10284	P35
G10111	P61	G10217	P56	G10229	P115	G10292	P116
G10111	P63	G10217	P89	G10229	P115	G10303	P64
G10111	P68	G10220	P86	G10229	P115	G10303	P65
G10111	P85	G10227	P65	G10229	P119	G10303	P67
G10111	P87	G10227	P67	G10230	P5	G10303	P97
G10111	P87	G10227	P115	G10230	P9	G10303	P97
G10111	P87	G10228	P9	G10230	P11	G10303	P111
G10111	P89	G10228	P29	G10230	P26	G10303	P115
G10111	P89	G10228	P29	G10230	P35	G10305	P85
G10111	P91	G10228	P39	G10230	P61	G10306	P65
G10111	P95	G10228	P39	G10230	P61	G10306	P89
G10111	P100	G10228	P39	G10230	P63	G10306	P91
G10111	P100	G10228	P39	G10230	P67	G10306	P119
G10112	P61	G10228	P60	G10230	P71	G10307	P42
G10128	P67	G10228	P67	G10230	P87	G10308	P11
G10128	P67	G10228	P67	G10230	P87	G10309	P13
G10128	P68	G10228	P67	G10230	P93	G10309	P35
G10130	P39	G10228	P67	G10230	P97	G10310	P23
G10130	P69	G10228	P68	G10230	P107	G10312	P3
G10130	P115	G10228	P68	G10230	P109	G10312	P23
G10130	P116	G10228	P71	G10231	P63	G10315	P23
G10131	P69	G10228	P73	G10231	P107	G10322	P87
G10133	P11	G10228	P75	G10231	P109	G10323	P17
G10133	P29	G10228	P75	G10232	P67	G10323	P113
G10133	P31	G10228	P75	G10232	P85	G10325	P7
G10133	P73	G10228	P79	G10232	P89	G10325	P23
G10133	P85	G10228	P79	G10232	P97	G10325	P41
G10133	P91	G10228	P85	G10232	P97	G10326	P14
G10157	P60	G10228	P93	G10232	P97	G10338	P13
G10159	P63	G10228	P93	G10232	P97	G10348	P29
G10168	P39	G10228	P95	G10232	P111	G10348	P60
G10168	P75	G10228	P97	G10232	P115	G10350	P113
G10168	P75	G10228	P107	G10233	P39	G10371	P29
G10169	P60	G10228	P109	G10233	P65	G10379	P102
G10171	P97	G10228	P111	G10233	P67	G10379	P103
G10171	P97	G10228	P115	G10233	P69	G10396	P41
G10177	P67	G10229	P11	G10233	P69	G10396	P61

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
G10401	P17	G10503	P31	G10620	P3	G10671	P77
G10408	P95	G10503	P85	G10620	P13	G10672	P97
G10408	P100	G10503	P91	G10620	P23	G10672	P104
G10408	P100	G10504	P85	G10620	P64	G10672	P107
G10409	P95	G10504X	P33	G10620	P65	G10674	P107
G10409	P100	G10507	P87	G10620	P92	G10674	P107
G10409	P115	G10527	P68	G10621	P13	G10674	P109
G10419	P95	G10531	P19	G10621	P17	G10676	P97
G10419	P100	G10535	P39	G10621	P17	G10676	P104
G10428	P41	G10542	P85	G10621	P23	G10681	P85
G10430	P69	G10544	P75	G10621	P24	G10681	P109
G10438	P3	G10546	P13	G10621	P35	G10681	P113
G10445	P95	G10546	P25	G10621	P47	G10681	P115
G10450	P89	G10551	P3	G10621	P64	G10686	P76
G10451	P35	G10551	P37	G10621	P146	G10690	P17
G10451	P41	G10561	P97	G10622	P7	G10693	P119
G10451	P85	G10567	P13	G10622	P65	G10718	P35
G10451	P97	G10567	P25	G10626	P107	G10722	P75
G10451	P102	G10570	P25	G10626	P107	G10725	P75
G10453	P69	G10574	P27	G10626	P109	G10727	P76
G10455	P67	G10574	P29	G10629	P107	G10732	P5
G10455	P95	G10574	P41	G10629	P109	G10732	P35
G10455	P100	G10581	P39	G10629	P111	G10734	P113
G10459	P87	G10581	P41	G10629	P116	G10751	P5
G10460	P41	G10585	P95	G10633	P107	G10751	P5
G10460	P63	G10587	P97	G10633	P109	G10751	P35
G10460	P68	G10588	P97	G10634	P19	G10752	P5
G10460	P69	G10592	P87	G10636	P63	G10752	P13
G10460	P71	G10594	P87	G10640	P41	G10757	P23
G10460	P73	G10599	P11	G10640	P67	G10758	P23
G10460	P73	G10599	P26	G10640	P71	G10765	P31
G10460	P73	G10599	P42	G10640	P71	G10821	P67
G10460	P73	G10599	P87	G10640	P73	G10821	P95
G10460	P95	G10602	P13	G10640	P73	G10821	P100
G10460	P97	G10602	P17	G10640	P87	G10822	P41
G10460	P104	G10602	P19	G10640	P89	G10830	P91
G10460	P111	G10602	P25	G10640	P91	G10844	P75
G10460	P115	G10602	P65	G10640	P95	G10860	P64
G10463	P35	G10602	P68	G10640	P97	G10860	P68
G10470	P17	G10602	P69	G10640	P102	G10862	P87
G10475	P21	G10602	P95	G10640	P115	G10864	P23
G10478	P115	G10602	P100	G10641	P86	G10870	P64
G10485	P107	G10602	P100	G10641	P115	G10870	P68
G10485	P109	G10602	P115	G10645	P41	G10871	P89
G10496	P39	G10603	P17	G10655	P97	G10874	P65
G10496	P67	G10603	P19	G10660	P25	G10879	P73
G10496	P116	G10603	P91	G10670	P23	G10890	P65
G10499	P85	G10604	P17	G10670	P24	G10895	P61
G10500	P17	G10615	P111	G10670	P71	G10901	P57
G10501	P29	G10615	P116	G10670	P97	G10901	P107
G10501	P65	G10619	P107	G10670	P102	G10901	P109
G10502X	P1	G10619	P109	G10670	P115	G10903	P61

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
G10908	P91	G11107X	P21	G11387	P115	G11578	P21
G10909	P39	G11151	P19	G11387	P119	G11591	P3
G10917	P111	G11152X	P21	G11389	P31	G11591	P37
G10923	P39	G11153X	P21	G11389	P35	G11592	P3
G10923	P69	G11154X	P21	G11389	P41	G11592	P37
G10923	P115	G11166	P146	G11389	P41	G11618	P20
G10923	P116	G11172	P20	G11389	P57	G11619	P20
G10938	P85	G11202	P82	G11389	P59	G11619	P21
G10939	P127	G11202	P82	G11389	P60	G11693	P21
G10940	P9	G11209	P23	G11389	P61	G11742	P76
G10957	P127	G11228	P31	G11389	P87	G11793	P25
G10961	P92	G11236	P31	G11389	P89	G11862	P11
G10966	P23	G11237	P111	G11389	P89	G11874	P77
G10968	P39	G11237	P116	G11389	P95	G11924	P105
G10974	P31	G11281	P21	G11389	P97	G11942	P102
G10974	P113	G11314	P63	G11389	P100	G11942	P103
G10984X	P1	G11332X	P21	G11389	P113	G11950	P102
G10985X	P33	G11385	P23	G11391	P11	G11950	P103
G10988	P47	G11385	P25	G11391	P63	G11960	P82
G10991	P89	G11385	P65	G11391	P65	G11960	P82
G10991	P119	G11385	P79	G11391	P75	G11961	P82
G10993	P61	G11386	P9	G11391	P77	G11966	P102
G10994	P116	G11386	P64	G11391	P86	G11976	P5
G10995	P116	G11386	P76	G11391	P87	G11976	P5
G11009	P17	G11386	P85	G11391	P89	G11976	P35
G11009	P19	G11386	P89	G11391	P91	G12000-40	P56
G11009	P21	G11386	P97	G11391	P92	G12002-35	P56
G11015	P3	G11386	P97	G11391	P103	G12002-60	P56
G11015	P37	G11387	P3	G11392	P31	G12015	P56
G11034	P91	G11387	P3	G11394	P41	G12039	P56
G11042X	P21	G11387	P11	G11396	P41	G12164	P56
G11046X	P21	G11387	P11	G11396	P73	G12215	P102
G11047X	P21	G11387	P13	G11400	P63	G12216	P102
G11048X	P21	G11387	P14	G11409	P47	G12217	P102
G11073	P25	G11387	P23	G11418	P75	G12218	P102
G11075	P68	G11387	P26	G11419	P11	G10011101	P5
G11075	P116	G11387	P41	G11436	P85	G10011201	P5
G11078	P67	G11387	P42	G11436	P87	G10011301	P35
G11078	P116	G11387	P61	G11436	P89	G10011401	P35
G11081	P63	G11387	P65	G11448	P21	G10018801	P7
G11083	P113	G11387	P65	G11453	P67	G10028601	P9
G11085	P61	G11387	P68	G11453	P111	G10028701	P9
G11091	P5	G11387	P68	G11453	P115	G10028801	P9
G11091	P107	G11387	P82	G11473	P104	G10037301	P7
G11091	P107	G11387	P85	G11474	P104	G10038601	P3
G11091	P109	G11387	P87	G11503	P113	G10038601	P37
G11091	P146	G11387	P87	G11514	P5	G10074401	P143
G11100	P67	G11387	P89	G11514	P5	G10090401	P7
G11100	P111	G11387	P91	G11514	P35	G10122301	P3
G11100	P115	G11387	P95	G11514	P35	G10122301	P37
G11105X	P21	G11387	P111	G11518	P47	G10216501	P98
G11106X	P21	G11387	P115	G11556	P21	G10216501	P104

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
G10216502	P98	G10984701	P56	GA4235	P100	GA5237	P93
G10229401	P82	G10984801	P57	GA4265	P61	GA5385	P79
G10230201	P61	G10984901	P56	GA4286	P86	GA5600	P81
G10253701	P53	G10984901	P57	GA4287	P86	GA5624	P67
G10322501	P9	G10985001	P57	GA4376	P63	GA5624	P95
G10329801	P13	G10985101	P56	GA4444	P24	GA5629	P67
G10334701	P9	G10985201	P56	GA4976	P107	GA5652	P97
G10334801	P9	G10985301	P56	GA4976	P109	GA5654	P29
G10334901	P9	G10985401	P56	GA5090	P65	GA5654	P31
G10335001	P9	G10985501	P56	GA5105	P65	GA5654	P91
G10335101	P9	G11040601	P102	GA5105	P67	GA5666	P97
G10335201	P9	G11040701	P102	GA5105	P67	GA5667	P97
G10371901	P142	G11040801	P102	GA5105	P95	GA5698	P19
G10383201	P76	G11114501	P56	GA5105	P100	GA5699	P19
G10397801	P7	G11114501	P57	GA5106	P67	GA5794	P19
G10397801	P9	G11114601	P56	GA5106	P68	GA5795	P19
G10397801	P85	G11114601	P57	GA5107	P39	GA5796	P19
G10397801	P92	G11211601	P57	GA5107	P67	GA5834	P19
G10429101	P17	G11211801	P57	GA5107	P95	GA5887	P86
G10429301	P17	G11211901	P57	GA5107	P100	GA5917	P107
G10475701	P3	G11212501	P58	GA5108	P67	GA5917	P109
G10483101	P21	G11212601	P58	GA5109	P67	GA5982	P19
G10483101	P21	G11212701	P59	GA5110	P67	GA6038	P19
G10483201	P21	G11212801	P59	GA5111	P67	GA6121	P100
G10483401	P21	GA0167	P75	GA5114	P95	GA6147	P82
G10500901	P3	GA0237	P86	GA5114	P100	GA6168	P19
G10500901	P37	GA0245	P75	GA5115	P95	GA6171	P9
G10605101	P63	GA0257	P75	GA5115	P100	GA6171	P11
G10609801	P113	GA0312	P85	GA5116	P67	GA6171	P11
G10609901	P109	GA0328	P85	GA5116	P95	GA6171	P11
G10610601	P109	GA0378	P69	GA5116	P95	GA6171	P92
G10610701	P111	GA0810	P85	GA5118	P65	GA6182	P19
G10614301	P21	GA0863	P97	GA5121	P63	GA6184	P19
G10664901	P21	GA0864	P97	GA5122	P63	GA6187	P19
G10665001	P21	GA0898	P97	GA5130	P73	GA6337	P95
G10665101	P21	GA1369	P85	GA5157	P65	GA6337	P100
G10690901	P113	GA1720	P5	GA5158	P65	GA6434	P11
G10696401	P113	GA2007	P13	GA5164	P69	GA6478	P19
G10696601	P113	GA2007	P35	GA5165	P69	GA6501	P111
G10745401	P81	GA2012L	P7	GA5178	P71	GA6501	P115
G10856502	P107	GA2012R	P7	GA5183	P71	GA6597	P11
G10856502	P109	GA2014	P29	GA5187	P61	GA6633	P19
G10871601	P9	GA2014	P31	GA5188	P73	GA6699	P79
G10871701	P9	GA2014	P85	GA5194	P111	GA6700	P79
G10871801	P9	GA2014	P91	GA5194	P115	GA6701	P79
G10936101	P21	GA2019	P17	GA5197	P61	GA6741	P23
G10961801	P68	GA2020	P17	GA5202	P68	GA6761	P41
G10983101	P21	GA2068	P65	GA5223	P95	GA6823	P79
G10983201	P21	GA2180	P39	GA5223	P100	GA6824	P79
G10983301	P21	GA3893	P109	GA5230	P93	GA6832	P29
G10984101	P56	GA3893	P116	GA5231	P93	GA6833	P29
G10984201	P56	GA4235	P95	GA5236	P93	GA6834	P29

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
GA6838	P29	GA8685	P85	GA12143	P13	GA21295	P52
GA6907	P23	GA8688	P87	GA12235	P31	GA21515	P3
GA6966	P89	GA8689	P87	GA12236	P29	GA21676	P9
GA7154	P39	GA8716	P39	GA12236	P31	GA21677	P9
GA7154	P67	GA8717	P39	GA12330	P119	GA21798	P95
GA7235	P64	GA8760	P31	GA12403	P81	GA21798	P100
GA7239	P87	GA8845	P85	GA13521	P82	GA24239	P27
GA7240	P87	GA8877	P92	GA13522	P82	GA24676	P21
GA7255	P19	GA8897	P127	GA13790	P64	GA24752	P21
GA7313	P95	GA8924	P127	GA14112	P107	GA24825	P63
GA7313	P100	GA8931	P113	GA14348	P63	GA24826	P63
GA7336	P68	GA8931	P121	GA14349	P63	GA24828	P63
GA7336	P95	GA9007	P61	GA14412	P63	GA24873	P15
GA7336	P100	GA9144	P81	GA14413	P63	GA24877	P21
GA7336	P111	GA9195	P85	GA14446	P55	GA24878	P21
GA7336	P115	GA9206	P79	GA14573	P46	GA24889	P35
GA7375	P107	GA9207	P79	GA14573	P47	GA25321	P79
GA7375	P109	GA9426	P61	GA15151	P75	GA25550	P21
GA7434	P63	GA9427	P61	GA15197	P11	GA25757	P102
GA7445	P91	GA9428	P60	GA15197	P26	GA25758	P105
GA7446	P91	GA9429	P60	GA15415	P85	GA25763	P61
GA7841	P68	GA9430	P93	GA15415	P87	GA25902	P105
GA7850	P81	GA9431	P93	GA15415	P89	GA25903	P103
GA7853	P81	GA9433	P89	GA15416	P85	GA25904	P103
GA7854	P81	GA9434	P89	GA15416	P87	GA25908	P102
GA7855	P81	GA9437	P89	GA15416	P89	GA25909	P102
GA7856	P81	GA9438	P61	GA15422	P146	GA26287	P24
GA7857	P81	GA9439	P61	GA15452	P46	GA26297	P37
GA7859	P81	GA9472	P92	GA15818	P45	GA26640	P102
GA7909	P61	GA9714	P15	GA16082	P81	GA26751	P79
GA7998	P91	GA9846	P65	GA16428	P107	GA26920	P7
GA7999	P91	GA9870	P65	GA18208	P19	GA26924-01	P131
GA8021	P81	GA9872	P41	GA20111	P21	GA26924-01	P133
GA8022	P81	GA9978	P81	GA20622	P21	GA26924-01	P144
GA8046	P81	GA9979	P81	GA20640	P13	GA26924-02	P131
GA8047	P79	GA10030	P111	GA20902	P81	GA26924-02	P133
GA8047	P81	GA10036	P92	GA21002	P76	GA26924-02	P144
GA8092	P39	GA10037	P92	GA21104	P123	GA26924-03	P131
GA8130	P127	GA10047	P89	GA21105	P123	GA26924-03	P133
GA8326	P25	GA10047	P89	GA21106	P122	GA26924-03	P144
GA8343	P17	GA10048	P89	GA21106	P123	GA26924-04	P131
GA8364	P25	GA10048	P89	GA21111	P122	GA26924-04	P133
GA8366	P25	GA10137	P13	GA21112	P122	GA26924-04	P144
GA8371	P24	GA10151	P13	GA21158	P126	GA26924-05	P144
GA8471	P61	GA10157	P3	GA21159	P126	GA26924-06	P144
GA8483	P85	GA10918	P134	GA21167	P125	GA26924-08	P144
GA8487	P41	GA11331	P111	GA21168	P125	GA26924-09	P144
GA8488	P41	GA11591	P73	GA21184	P124	GA26924-10	P144
GA8603	P27	GA11650	P138	GA21185	P124	GA26924-11	P144
GA8603	P89	GA11766	P73	GA21190	P54	GA26958	P11
GA8641	P27	GA11767	P73	GA21197	P52	GA26989	P21
GA8676	P41	GA11971	P35	GA21239	P104	GA27037	P102

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
GA27038	P31	GB0697	P20	GD1065	P14	GD2117	P143
GA27124	P103	GB0780	P20	GD1083	P17	GD2161	P73
GA27125	P103	GB0815	P20	GD1085	P11	GD2199	P79
GB0110	P17	GB0818	P21	GD1104	P87	GD2199	P140
GB0115	P25	GB0823	P20	GD1109	P11	GD2412	P97
GB0116	P25	GB0907	P21	GD1113	P35	GD2423	P23
GB0120	P17	GB0920	P21	GD1113	P61	GD2548-10.75	P104
GB0134	P85	GB0921	P21	GD1114	P5	GD2548-15.5	P98
GB0186	P5	GB0926	P21	GD1114	P61	GD2558	P48
GB0198	P97	GB0958	P21	GD1114	P87	GD2558	P61
GB0199	P97	GB0968	P42	GD1114	P93	GD2558	P65
GB0200	P97	GB1090	P81	GD1114	P97	GD2558	P68
GB0205	P86	GB1090	P81	GD1114	P103	GD2558	P95
GB0206	P87	GB1090	P81	GD1132	P29	GD2558	P100
GB0209	P87	GB1147	P20	GD1132	P31	GD2589	P85
GB0210	P87	GB1223	P5	GD1132	P85	GD2597	P75
GB0218	P65	GB1223	P35	GD1132	P91	GD2721	P71
GB0218	P86	GB1224	P5	GD1138	P85	GD2721	P73
GB0239	P11	GB1224	P5	GD1138	P93	GD2734-08	P111
GB0254	P11	GB1224	P35	GD1162	P143	GD2734-08	P115
GB0259	P68	GB1224	P35	GD1200	P97	GD2947	P23
GB0265	P3	GB1231	P21	GD1200	P102	GD2971-10	P23
GB0266	P3	GB1237	P21	GD1207	P97	GD2971-26	P7
GB0266	P37	GD0438	P71	GD1207	P102	GD2984	P143
GB0267	P3	GD0453-03	P73	GD1209	P97	GD3180-17	P95
GB0267	P37	GD0453-05	P71	GD1210	P97	GD3180-17	P100
GB0268	P11	GD0462	P71	GD1213	P97	GD3612	P3
GB0274	P3	GD0487	P85	GD1213	P97	GD3612	P37
GB0274	P37	GD0746	P75	GD1255	P69	GD3839	P111
GB0276	P9	GD0752-41	P73	GD1256	P69	GD3839	P115
GB0278	P13	GD0840	P75	GD1379	P97	GD4887-01	P67
GB0278	P25	GD0914-84	P39	GD1380	P97	GD5752	P65
GB0282	P11	GD0914-144	P39	GD1512	P143	GD5753	P65
GB0287	P69	GD0914-170	P69	GD1514	P107	GD5756	P65
GB0292	P60	GD0914-205	P39	GD1514	P109	GD5756	P68
GB0296	P89	GD0914-230	P69	GD1515	P107	GD5789	P64
GB0314	P5	GD0962	P85	GD1515	P109	GD5790	P64
GB0314	P35	GD1026	P14	GD1516	P107	GD5791	P64
GB0322	P89	GD1026	P23	GD1516	P109	GD5824	P68
GB0323	P89	GD1026	P42	GD1517	P107	GD5827	P64
GB0331	P13	GD1026	P65	GD1517	P109	GD5827	P67
GB0366	P5	GD1026	P68	GD1654	P97	GD5830	P68
GB0383	P31	GD1026	P89	GD1657	P85	GD5835	P68
GB0387	P29	GD1026	P95	GD1673	P85	GD5841	P63
GB0387	P31	GD1026	P115	GD1685-13	P93	GD5857	P29
GB0400	P89	GD1041	P17	GD1685-16	P93	GD5857	P64
GB0405	P89	GD1042	P17	GD1748	P107	GD5857	P67
GB0410	P17	GD1059L	P24	GD1748	P109	GD5857	P95
GB0410	P17	GD1059R	P24	GD1755	P19	GD5857	P100
GB0464	P31	GD1060	P24	GD1862	P102	GD5857	P111
GB0554	P75	GD1061	P25	GD1862	P107	GD5857	P115
GB0676	P21	GD1063	P25	GD1862	P109	GD5860	P65

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
GD5875.....	P61	GD7962.....	P86	GD11123.....	P109	GD11962.....	P14
GD5875.....	P73	GD7962.....	P91	GD11124.....	P107	GD11962.....	P23
GD5884-01.....	P69	GD8224.....	P87	GD11124.....	P109	GD11985.....	P124
GD5885-01.....	P69	GD8237.....	P19	GD11178.....	P91	GD11995.....	P127
GD5886.....	P95	GD8238.....	P86	GD11180.....	P111	GD12101.....	P125
GD5886.....	P98	GD8239.....	P87	GD11180.....	P115	GD12101.....	P126
GD5886.....	P98	GD8246.....	P100	GD11188.....	P91	GD12102.....	P122
GD5886.....	P104	GD8247.....	P86	GD11218.....	P42	GD12102.....	P123
GD5888.....	P61	GD8276.....	P87	GD11219.....	P23	GD12102.....	P124
GD5892.....	P71	GD8304.....	P79	GD11239.....	P13	GD12505.....	P123
GD5961.....	P69	GD8460.....	P11	GD11239.....	P25	GD12507.....	P122
GD5961.....	P98	GD8751.....	P81	GD11240.....	P25	GD12510.....	P125
GD5990.....	P115	GD8770.....	P81	GD11259.....	P3	GD12510.....	P126
GD6027.....	P41	GD8771.....	P81	GD11259.....	P37	GD12513.....	P127
GD6027.....	P61	GD8778.....	P19	GD11264.....	P35	GD12561.....	P15
GD6027.....	P61	GD8893-01.....	P42	GD11265.....	P91	GD12561.....	P15
GD6551.....	P67	GD8893-07.....	P77	GD11266.....	P91	GD12571.....	P67
GD6553.....	P86	GD9120.....	P11	GD11279.....	P15	GD12676.....	P89
GD6825-10.5.....	P65	GD9229.....	P39	GD11286.....	P17	GD12677.....	P89
GD7127.....	P67	GD9254.....	P27	GD11297.....	P25	GD12679.....	P89
GD7127.....	P95	GD9695.....	P35	GD11305.....	P23	GD12684.....	P91
GD7127.....	P100	GD9715.....	P29	GD11306.....	P7	GD12685.....	P89
GD7140.....	P60	GD9720.....	P29	GD11306.....	P85	GD13287.....	P89
GD7145.....	P39	GD9724.....	P29	GD11313.....	P26	GD13309.....	P92
GD7145.....	P79	GD9724.....	P31	GD11413.....	P13	GD13348.....	P81
GD7145.....	P107	GD9724.....	P91	GD11413.....	P25	GD13401.....	P63
GD7148.....	P25	GD10036.....	P5	GD11423.....	P92	GD14217.....	P5
GD7152.....	P79	GD10110.....	P107	GD11424.....	P24	GD14413.....	P68
GD7258.....	P25	GD10110.....	P109	GD11458.....	P63	GD14413.....	P116
GD7318.....	P14	GD10161.....	P95	GD11474.....	P82	GD14427.....	P68
GD7426.....	P65	GD10161.....	P100	GD11490.....	P63	GD14427.....	P116
GD7426.....	P68	GD10242.....	P87	GD11508.....	P26	GD14431.....	P67
GD7426.....	P95	GD10273.....	P87	GD11509.....	P26	GD14431.....	P116
GD7426.....	P115	GD10283.....	P75	GD11528.....	P17	GD14432.....	P68
GD7803.....	P27	GD10303.....	P87	GD11535.....	P41	GD14432.....	P116
GD7804.....	P27	GD10304.....	P87	GD11557.....	P89	GD14559.....	P87
GD7817-04.....	P91	GD10487.....	P87	GD11558.....	P89	GD14626.....	P49
GD7822.....	P67	GD10519.....	P31	GD11559.....	P41	GD14627.....	P49
GD7848.....	P97	GD10552.....	P91	GD11649.....	P35	GD15386.....	P73
GD7867.....	P98	GD10963.....	P23	GD11657.....	P41	GD15538.....	P68
GD7867.....	P98	GD10984.....	P23	GD11662.....	P41	GD15685.....	P111
GD7867.....	P104	GD10991.....	P9	GD11677.....	P27	GD15685.....	P115
GD7870.....	P95	GD10993.....	P3	GD11700.....	P113	GD15698.....	P17
GD7870.....	P100	GD10993.....	P37	GD11700.....	P115	GD15699.....	P19
GD7878.....	P19	GD11001.....	P3	GD11705.....	P85	GD15792-18.....	P49
GD7900.....	P86	GD11045.....	P39	GD11721.....	P39	GD16245.....	P3
GD7904-02.....	P87	GD11045.....	P69	GD11721.....	P107	GD16245.....	P37
GD7907.....	P87	GD11045.....	P115	GD11721.....	P109	GD16302.....	P68
GD7908.....	P86	GD11089.....	P79	GD11787.....	P17	GD17014.....	P3
GD7912.....	P87	GD11089.....	P82	GD11836.....	P91	GD17052.....	P13
GD7944.....	P41	GD11122.....	P19	GD11953.....	P92	GD18118.....	P82
GD7944.....	P65	GD11123.....	P107	GD11954.....	P92	GD18168.....	P82

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
GD18704.....	P17	GD30725.....	P31	GR0912.....	P68	GR1574.....	P121
GD19123.....	P135	GD30725.....	P85	GR0912.....	P95	GR1708.....	P107
GD19292.....	P27	GD31433.....	P61	GR0912.....	P115	GR1762.....	P81
GD19333.....	P17	GD31435.....	P54	GR0962.....	P71	GR1763.....	P82
GD19343.....	P68	GD31450.....	P67	GR1015.....	P107	GR1795.....	P119
GD19343.....	P116	GD33279.....	P61	GR1016.....	P107	GR1797.....	P119
GD19790.....	P17	GD34178.....	P63	GR1017.....	P107	GR1799.....	P119
GD20060.....	P107	GD34774.....	P21	GR1018.....	P107	GR1801.....	P119
GD20060.....	P109	GD34923.....	P86	GR1019.....	P107	GR1802.....	P119
GD20461.....	P63	GD35127.....	P77	GR1037.....	P131	GR1804.....	P119
GD21337.....	P5	GD35339.....	P77	GR1037.....	P131	GR1805.....	P119
GD21398.....	P97	GD35340.....	P77	GR1037.....	P133	GR1806.....	P119
GD21398.....	P104	GD35444.....	P7	GR1037.....	P133	GR1808.....	P119
GD21540.....	P75	GD35471.....	P35	GR1037.....	P133	GR1842MPP.....	P145
GD22685.....	P146	GD35472.....	P35	GR1045.....	P131	GR1848.....	P17
GD22692.....	P146	GD35667.....	P104	GR1104.....	P119	GR1941.....	P107
GD24545.....	P3	GD35684.....	P104	GR1112.....	P119	GR1956.....	P79
GD24545.....	P35	GD35717.....	P103	GR1116.....	P119	GR1956.....	P79
GD25568.....	P35	GD35937.....	P103	GR1118.....	P119	GR1957.....	P79
GD25569.....	P35	GD36277.....	P23	GR1120.....	P119	GR1958.....	P79
GD26146.....	P11	GD36709.....	P9	GR1122.....	P111	GR1960.....	P46
GD26538.....	P48	GD36713.....	P9	GR1122.....	P115	GR1960.....	P47
GD26593.....	P21	GD36856.....	P7	GR1123.....	P119	GR1961.....	P47
GD26594.....	P17	GD36860.....	P7	GR1124.....	P119	GR1968.....	P47
GD26697.....	P45	GD36895.....	P11	GR1134.....	P119	GR1969.....	P47
GD26973.....	P31	GD36922.....	P17	GR1169.....	P127	GR1970.....	P47
GD27233.....	P125	GD36990.....	P7	GR1208.....	P79	GR1971.....	P47
GD27233.....	P126	GD37025.....	P103	GR1208.....	P79	GR1978.....	P47
GD27234.....	P124	GD37041.....	P104	GR1389.....	P119	GR1979.....	P47
GD27235.....	P122	GM0309-02.....	P146	GR1401.....	P127	GR2003.....	P119
GD27235.....	P123	GR0146MPP.....	P145	GR1405.....	P39	GR2109.....	P47
GD27235.....	P127	GR0150.....	P75	GR1406.....	P39	GR2127MPP.....	P145
GD28390.....	P3	GR0151.....	P75	GR1407.....	P39	GR2154.....	P17
GD28631.....	P21	GR0188.....	P86	GR1408.....	P39	GR2225.....	P123
GD29221.....	P61	GR0193.....	P71	GR1409.....	P39	GR2227.....	P124
GD29459.....	P35	GR0196.....	P3	GR1410.....	P39	GR2228.....	P122
GD29507.....	P13	GR0196.....	P23	GR1411.....	P39	GR2229.....	P125
GD29657.....	P21	GR0196.....	P25	GR1412.....	P39	GR2229.....	P126
GD29689.....	P125	GR0196.....	P35	GR1413.....	P39	GR2240MPP.....	P145
GD29689.....	P126	GR0255.....	P60	GR1414.....	P82	GR2241MPP.....	P145
GD29719.....	P134	GR0270.....	P63	GR1415.....	P82		
GD29798.....	P3	GR0434.....	P63	GR1523.....	P127		
GD30221.....	P76	GR0508.....	P107	GR1533.....	P121		
GD30401.....	P124	GR0586.....	P81	GR1535.....	P121		
GD30622.....	P66	GR0594.....	P81	GR1540.....	P121		
GD30622.....	P66	GR0664.....	P17	GR1541.....	P121		
GD30622.....	P68	GR0880.....	P116	GR1542.....	P121		
GD30624.....	P66	GR0881.....	P116	GR1543.....	P119		
GD30624.....	P66	GR0882.....	P116	GR1543.....	P121		
GD30624.....	P68	GR0883.....	P116	GR1544.....	P121		
GD30722.....	P76	GR0912.....	P39	GR1545.....	P121		
GD30723.....	P76	GR0912.....	P65	GR1569.....	P17		
GD30725.....	P7	GR0912.....	P67	GR1570MPP.....	P145		

This page left blank intentionally.